


Level (55:9000 Hz) = 89.29 dB SPL/watt (8 ohms, @1.00 meters)

6W4P

MLSSA: Frequency Domain

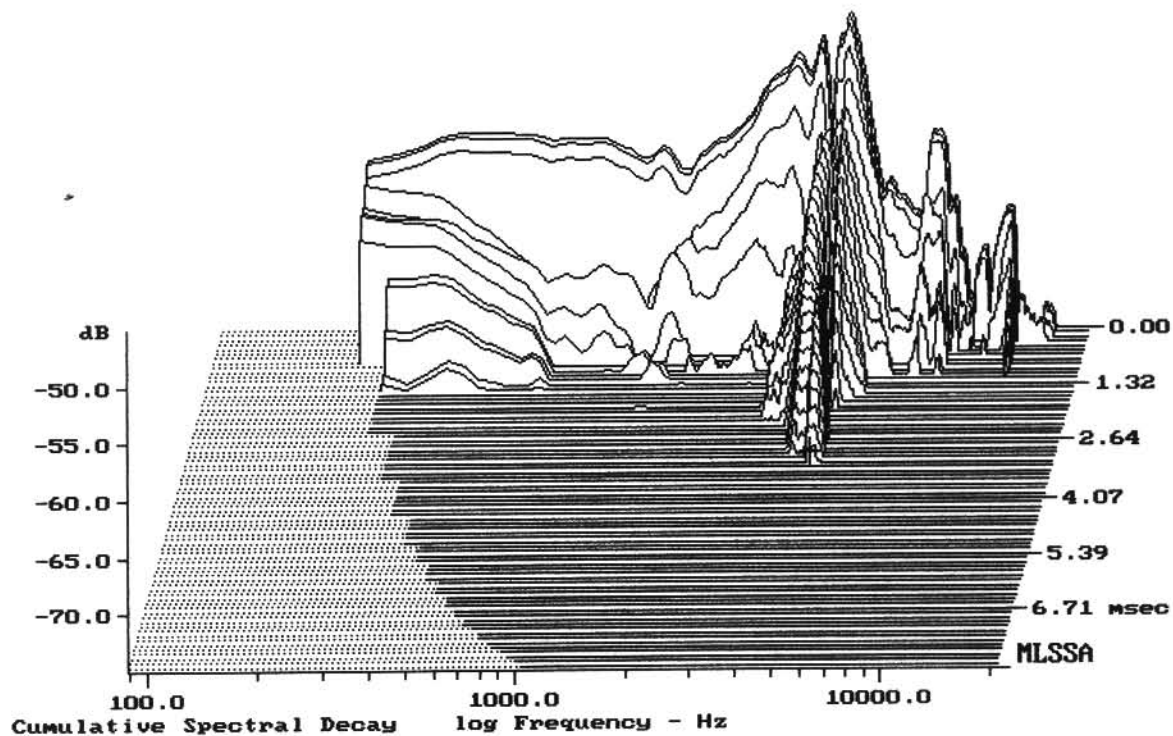

-74.02 dB, 4483 Hz (101), 3.190 msec (30)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	82.91	Hz
3	Re	6.22	Ohms[dc]
4	Res	34.53	Ohms
5	Qms	7.26	
6	Qes	1.31	
7	Qts	1.11	
8	L1	0.27	mH
9	L2	0.42	mH
10	R2	3.80	Ohms
11	RMSE-load	0.32	Ohms
12	Vas(Sd)	6.13	liters
13	Mms	14.27	grams
14	Cms	258	$\mu\text{M}/\text{Newton}$
15	Bl	5.95	Tesla-M
16	SPLref(Sd)	86.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 130.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.9% (-20% to -50% is recommended).

6W4P

MLSSA: Parameters

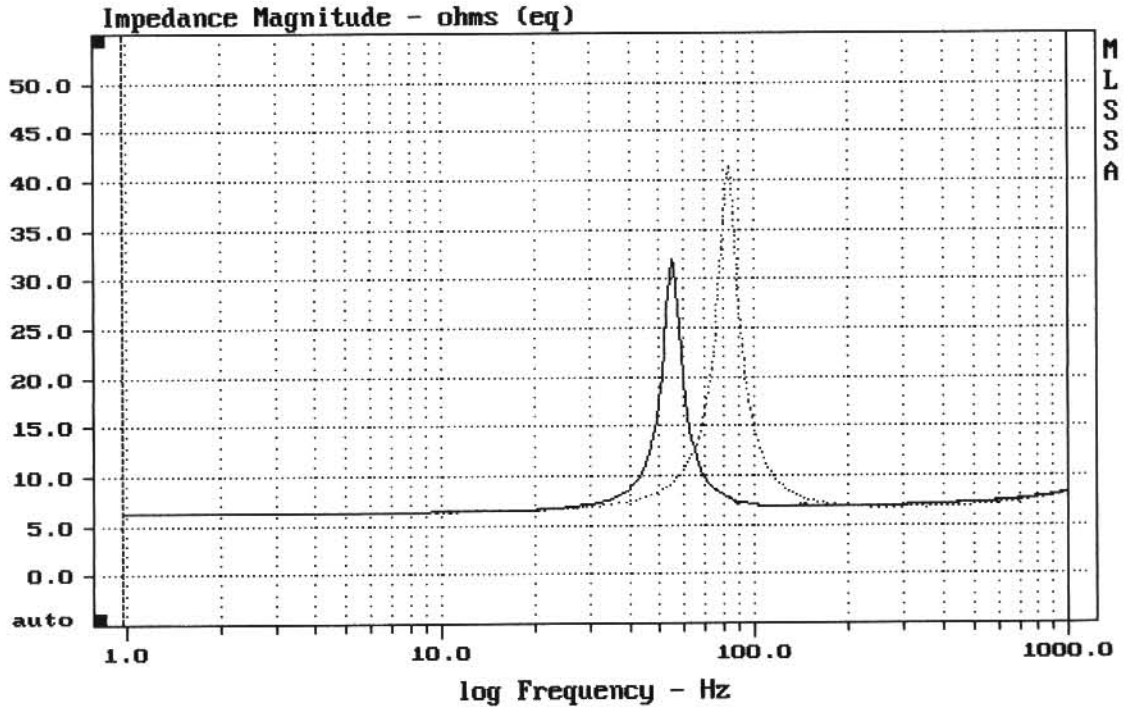

mean: 8.032, rms: 8.861, std: 3.743, max: 41.37, min: 6.279

DTTO

MLSSA: Frequency Domain