


Level (100:6503 Hz) = 94.60 dB SPL/watt (8 ohms, @1.00 meters)

8W4P

MLSSA: Frequency Domain

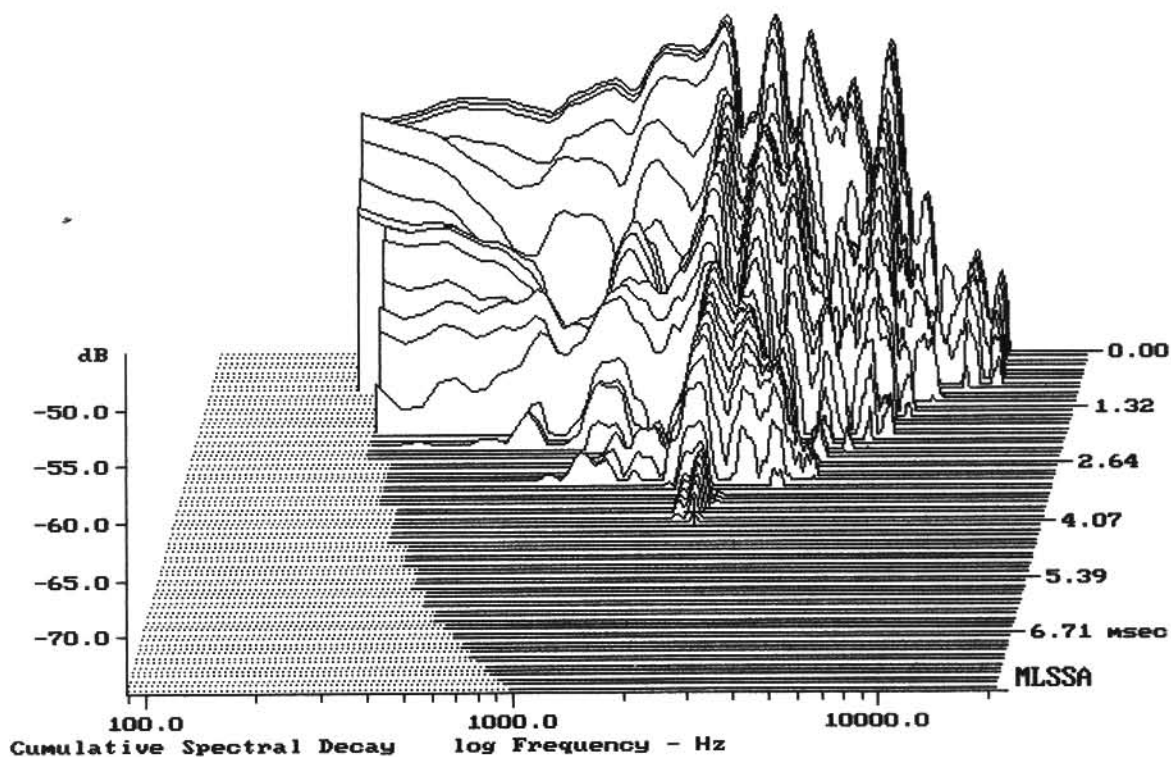

-74.22 dB, 2300 Hz (52), 4.070 msec (38)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.19	Ohms
2	Fs	112.92	Hz
3	Re	5.27	Ohms[dc]
4	Res	91.89	Ohms
5	Qms	14.24	
6	Qes	0.82	
7	Qts	0.77	
8	L1	0.48	mH
9	L2	0.50	mH
10	R2	2.37	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	7.76	liters
13	Mms	18.53	grams
14	Cms	107	$\mu\text{M}/\text{Newton}$
15	Bl	9.21	Tesla-M
16	SPLref(Sd)	93.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -43.2% (-20% to -50% is recommended).

8W4P

MLSSA: Parameters

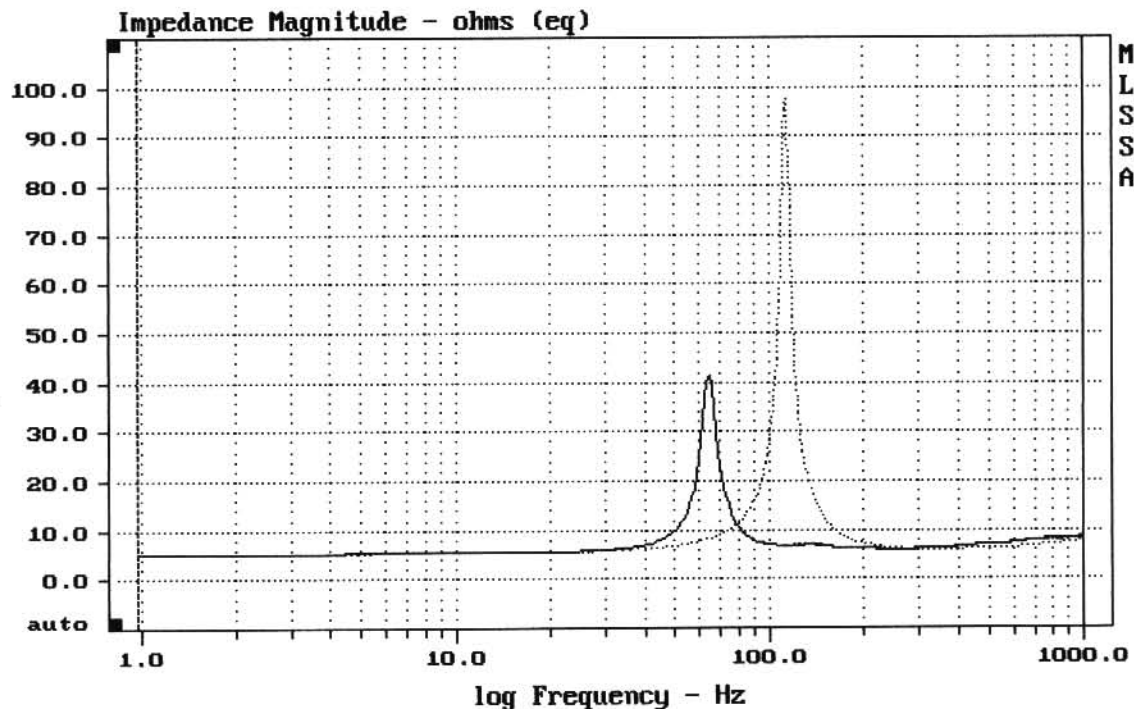

mean: 8.613, rms: 12.45, std: 8.996, max: 97.49, min: 5.321

DTTO

MLSSA: Frequency Domain