


Level (67:6004 Hz) = 90.76 dB SPL/watt (8 ohms, @1.00 meters)

CIARE COD..603015 "HW204"

MLSSA: Frequency Domain

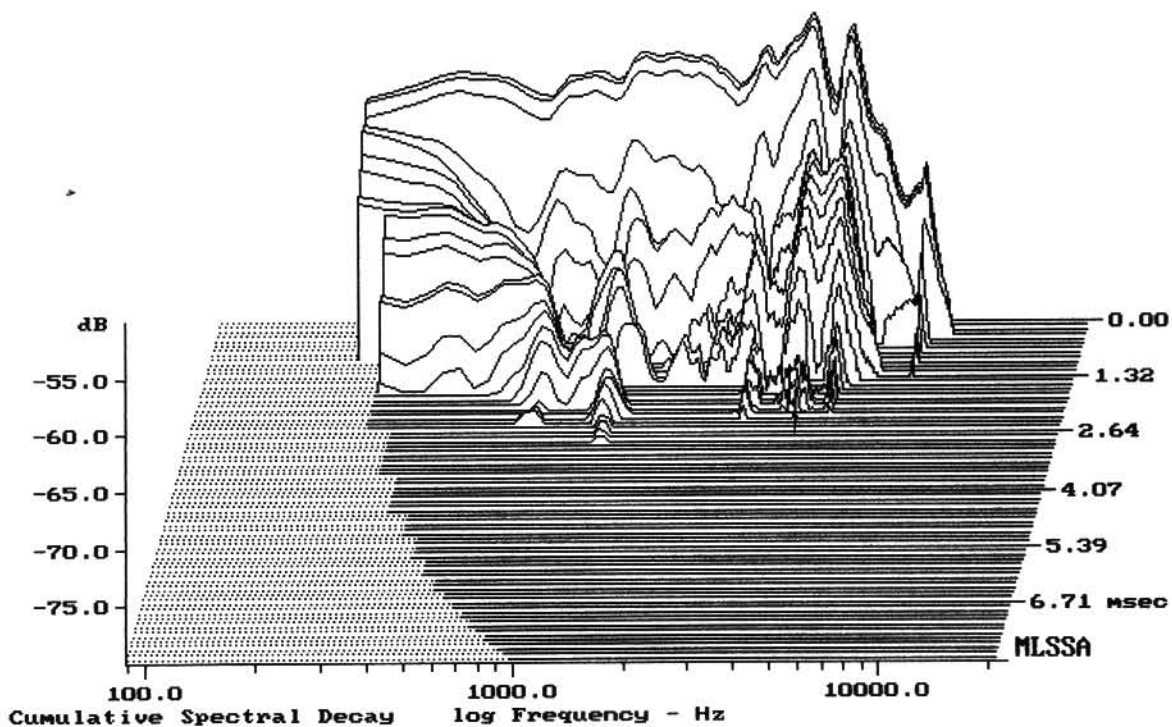

-79.56 dB, 3862 Hz (87), 2.310 msec (22)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	46.94	Hz
3	Re	11.48	Ohms[dc]
4	Res	53.20	Ohms
5	Qms	2.14	
6	Qes	0.46	
7	Qts	0.38	
8	L1	0.85	mH
9	L2	1.74	mH
10	R2	6.71	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	34.04	liters
13	Mms	22.96	grams
14	Cms	501	$\mu\text{M}/\text{Newton}$
15	Bl	12.98	Tesla-M
16	SPLref(Sd)	90.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.7% (-20% to -50% is recommended).

CIARE COD..603015 "HW204"

MLSSA: Parameters

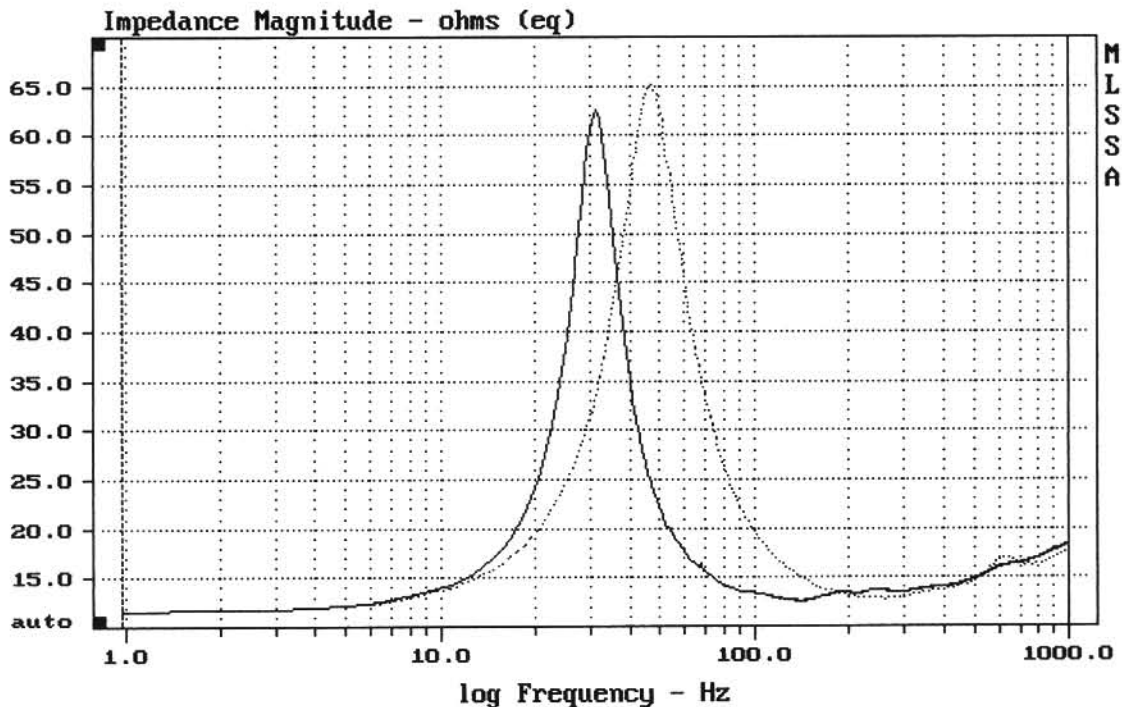

mean: 17.08, rms: 18.57, std: 7.282, max: 65.12, min: 11.63

DTTO

MLSSA: Frequency Domain