


CURSOR: dy = -41.1539 x = 30007.1014 (2704)


BCXT

MLSSA: Frequency Domain

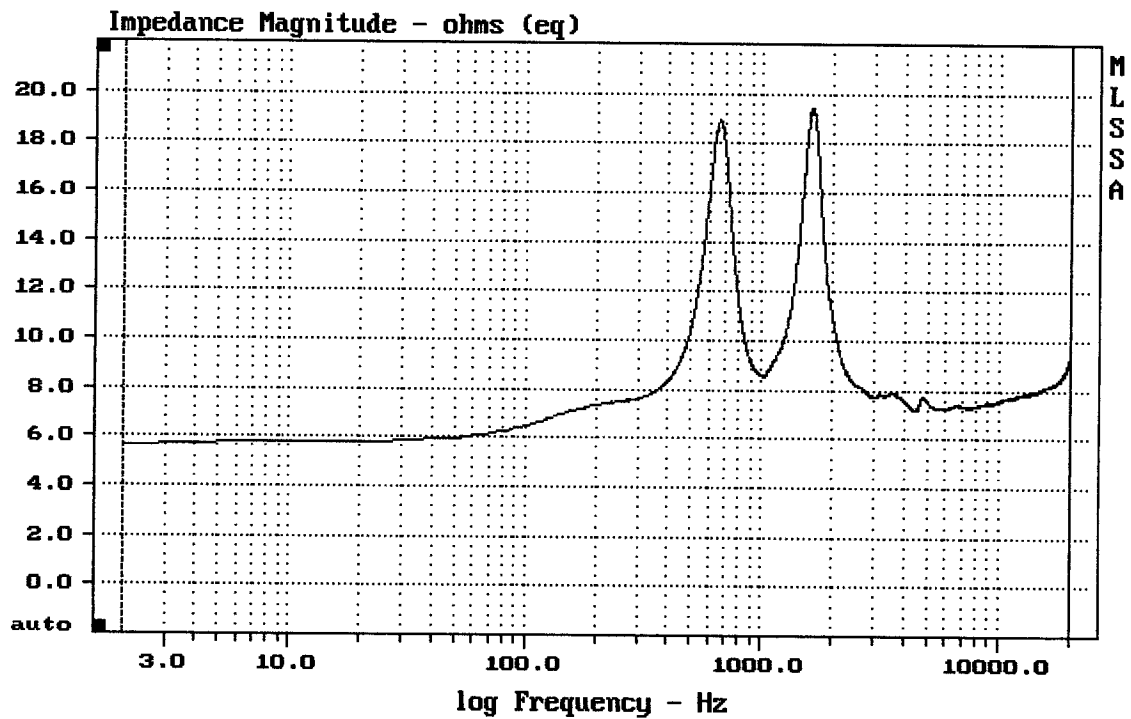

mean: 8.265, rms: 8.451, std: 1.765, max: 19.44, min: 5.652


BCXT

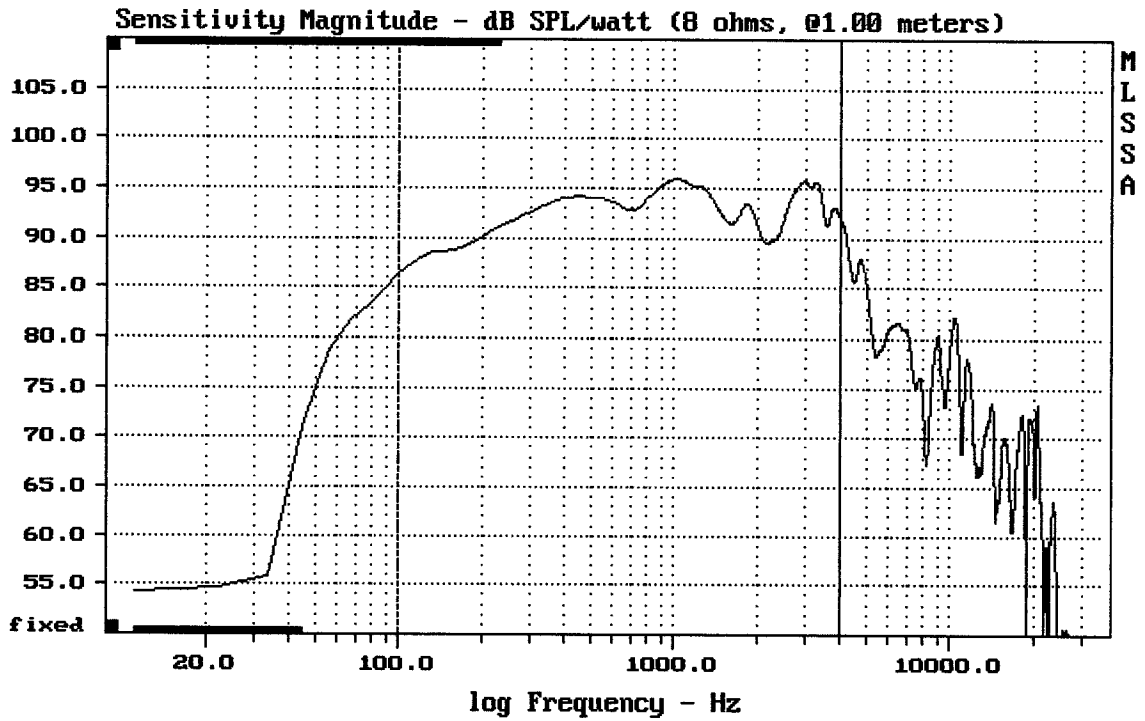


Level (100:4006 Hz) = 92.92 dB SPL/watt (8 ohms, @1.00 meters)

BCXT

MLSSA: Frequency Domain

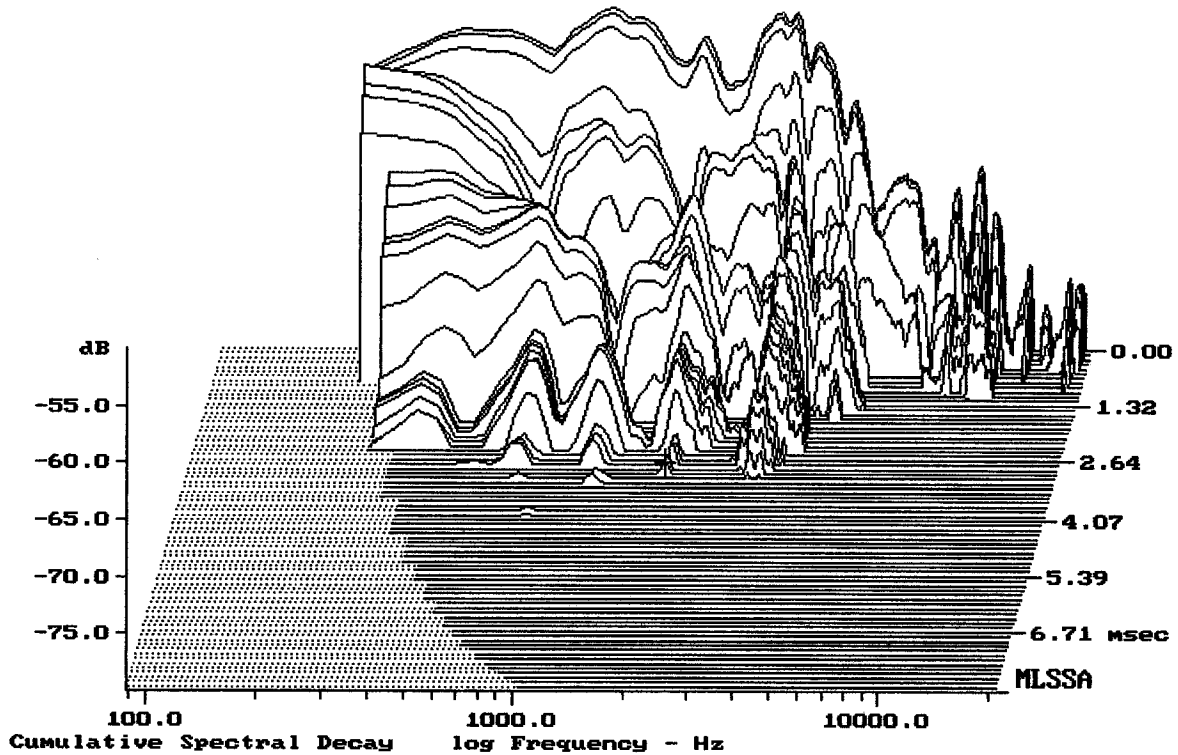


-78.97 dB, 1776 Hz (40), 2.970 msec (28)

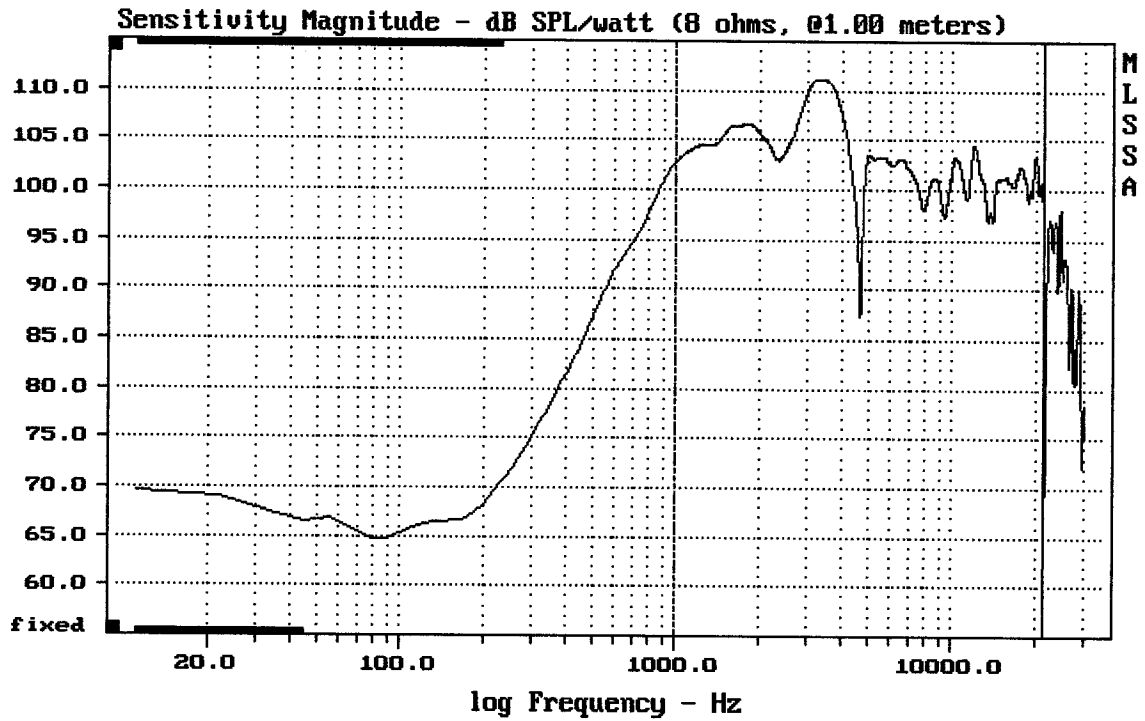

Level (999:21507 Hz) = 104.91 dB SPL/watt (8 ohms, @1.00 meters)

8CXT

MLSSA: Frequency Domain

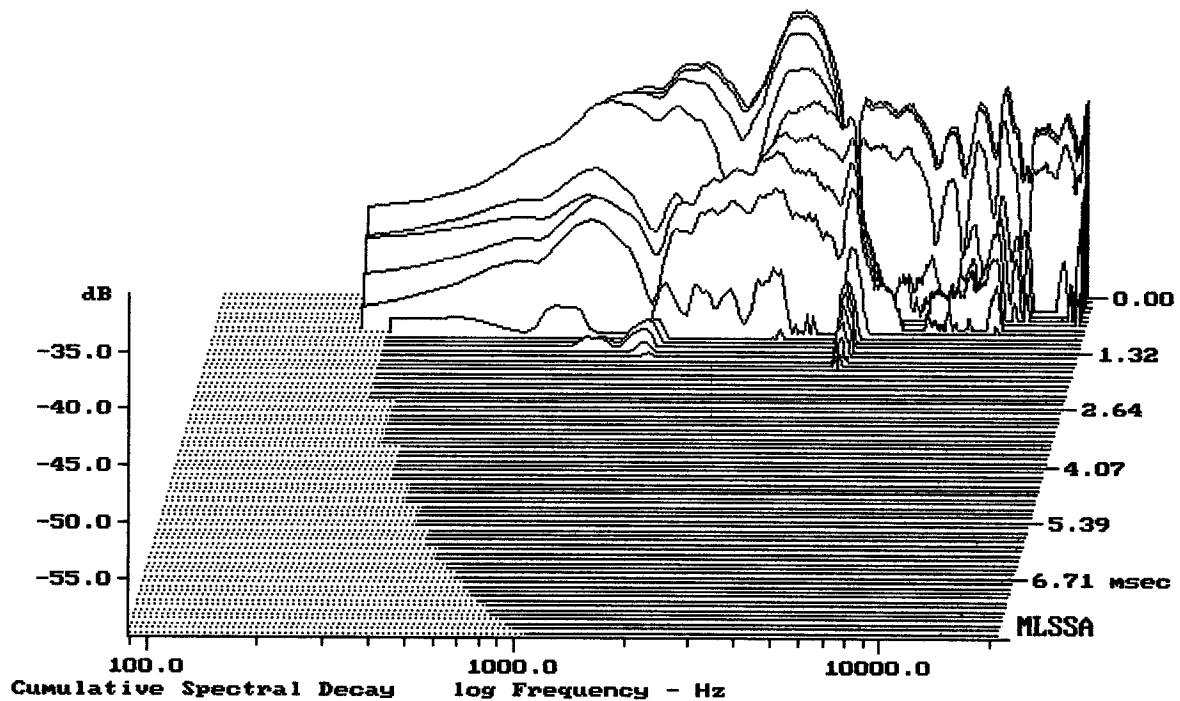

-59.18 dB, 4750 Hz (107), 1.650 msec (16)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	85.28	Hz
3	Re	4.97	Ohms[dc]
4	Res	92.84	Ohms
5	Qms	7.00	
6	Qes	0.38	
7	Qts	0.36	
8	L1	0.71	mH
9	L2	0.97	mH
10	R2	2.42	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	8.70	liters
13	Mms	22.48	grams
14	Cms	155	μ M/Newton
15	B1	12.64	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 200.00 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.3% (-20% to -50% is recommended).

8CXT

MLSSA: Parameters