


Level (100:7002 Hz) = 92.35 dB SPL/watt (8 ohms, @1.00 meters)

6NDL38

MLSSA: Frequency Domain

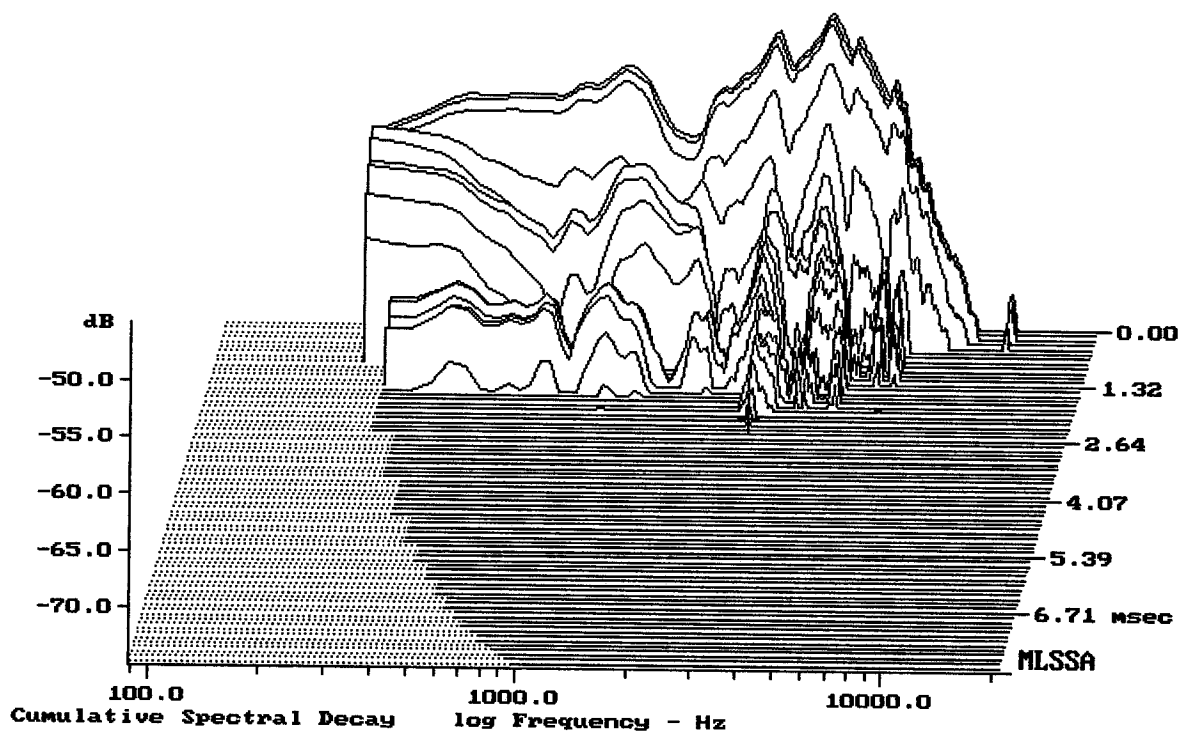

-74.34 dB, 2797 Hz (63), 2.310 msec (22)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.29	Ohms
2	Fs	72.40	Hz
3	Re	5.19	Ohms[dc]
4	Res	106.73	Ohms
5	Qms	9.64	
6	Qes	0.47	
7	Qts	0.45	
8	L1	0.33	mH
9	L2	0.39	mH
10	R2	2.79	Ohms
11	RMSE-load	0.24	Ohms
12	Vas(Sd)	7.85	liters
13	Mms	15.24	grams
14	Cms	317	μ M/Newton
15	B1	8.76	Tesla-M
16	SPLref(Sd)	89.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (15.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.8% (-20% to -50% is recommended).

6NDL38

MLSSA: Parameters

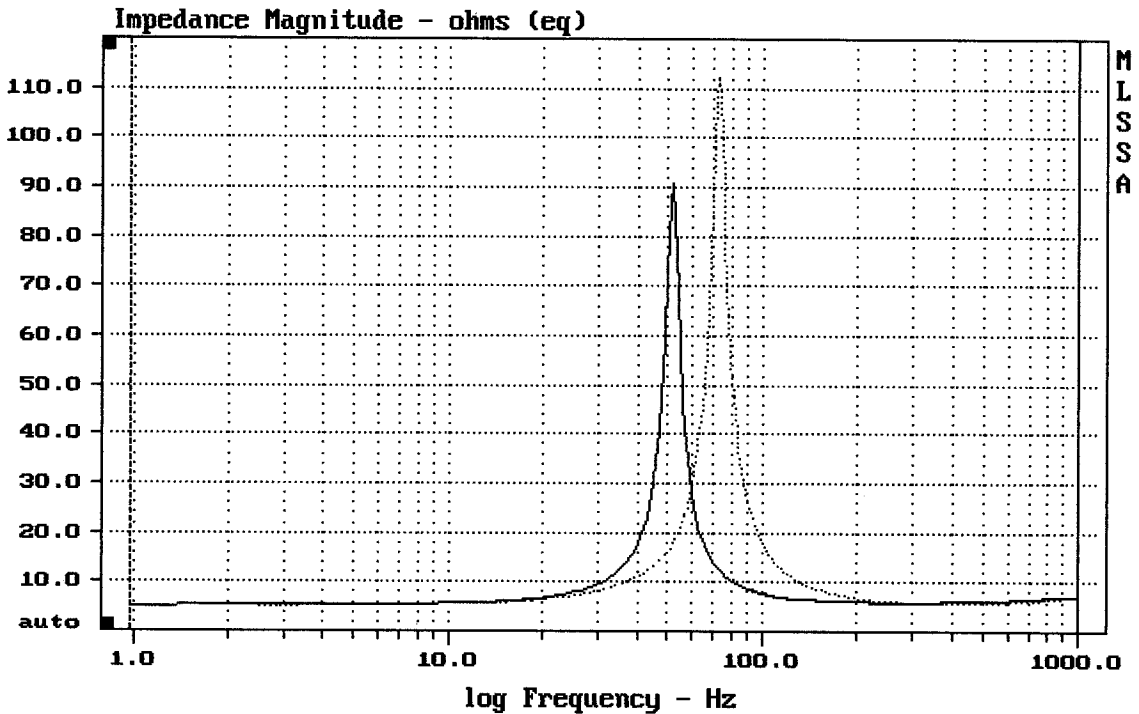

mean: 8.59, rms: 13.43, std: 10.32, max: 112.1, min: 5.2

DTTO

MLSSA: Frequency Domain