


Level (100:5504 Hz) = 95.69 dB SPL/watt (8 ohms, @1.00 meters)

8MB4P

MLSSA: Frequency Domain

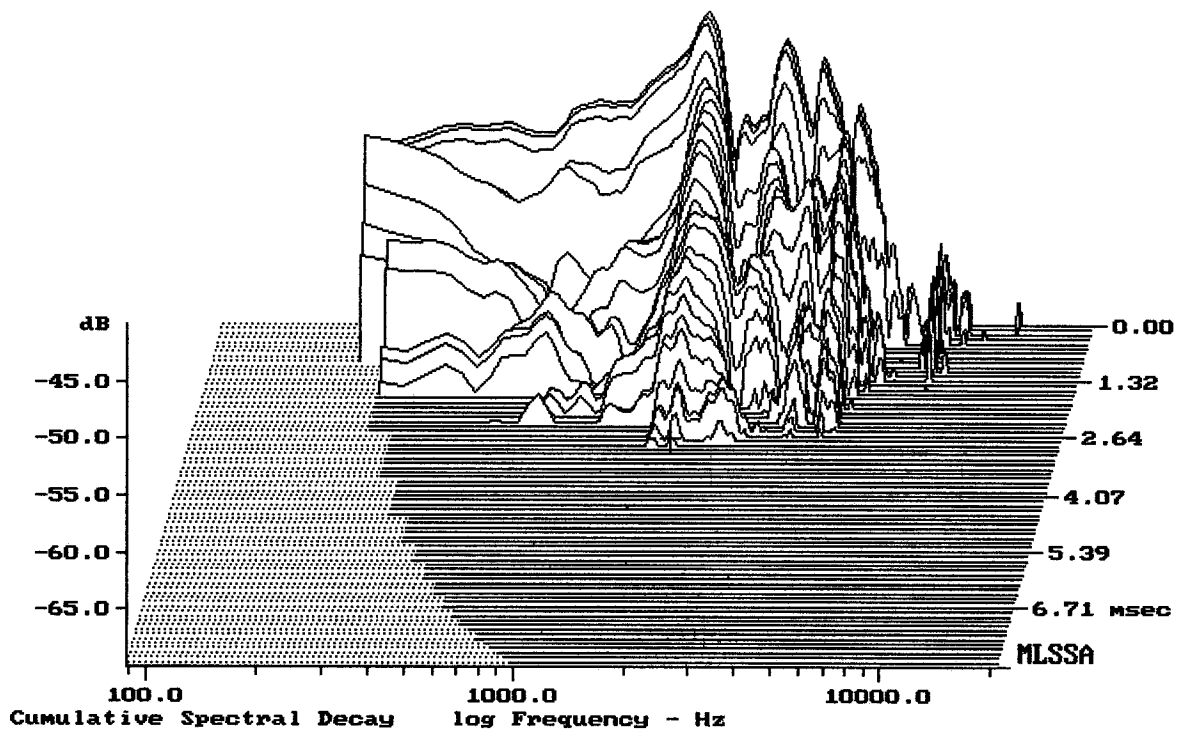

-69.34 dB, 1820 Hz (41), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	106.21	Hz
3	Re	5.28	Ohms[dc]
4	Res	67.22	Ohms
5	Qms	10.37	
6	Qes	0.81	
7	Qts	0.75	
8	L1	0.41	mH
9	L2	0.46	mH
10	R2	3.05	Ohms
11	RMSE-load	0.42	Ohms
12	Vas(Sd)	8.91	liters
13	Mms	18.24	grams
14	Cms	123	$\mu\text{M}/\text{Newton}$
15	B1	8.88	Tesla-M
16	SPLref(Sd)	93.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -43.0% (-20% to -50% is recommended).

8MB4P

MLSSA: Parameters

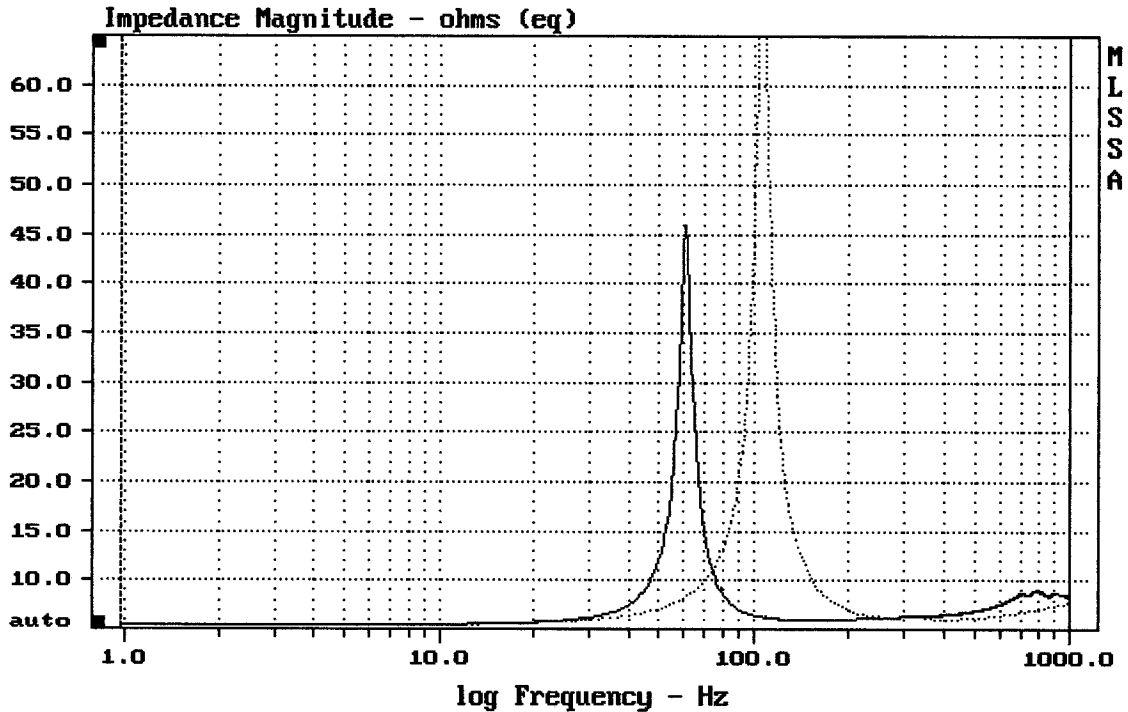

mean: 8.282, rms: 11.05, std: 7.313, max: 72.48, min: 5.325

MLSSA: Frequency Domain