


Level (100:12007 Hz) = 87.45 dB SPL/watt (8 ohms, @1.00 meters)

BEYMA SMP60N

MLSSA: Frequency Domain

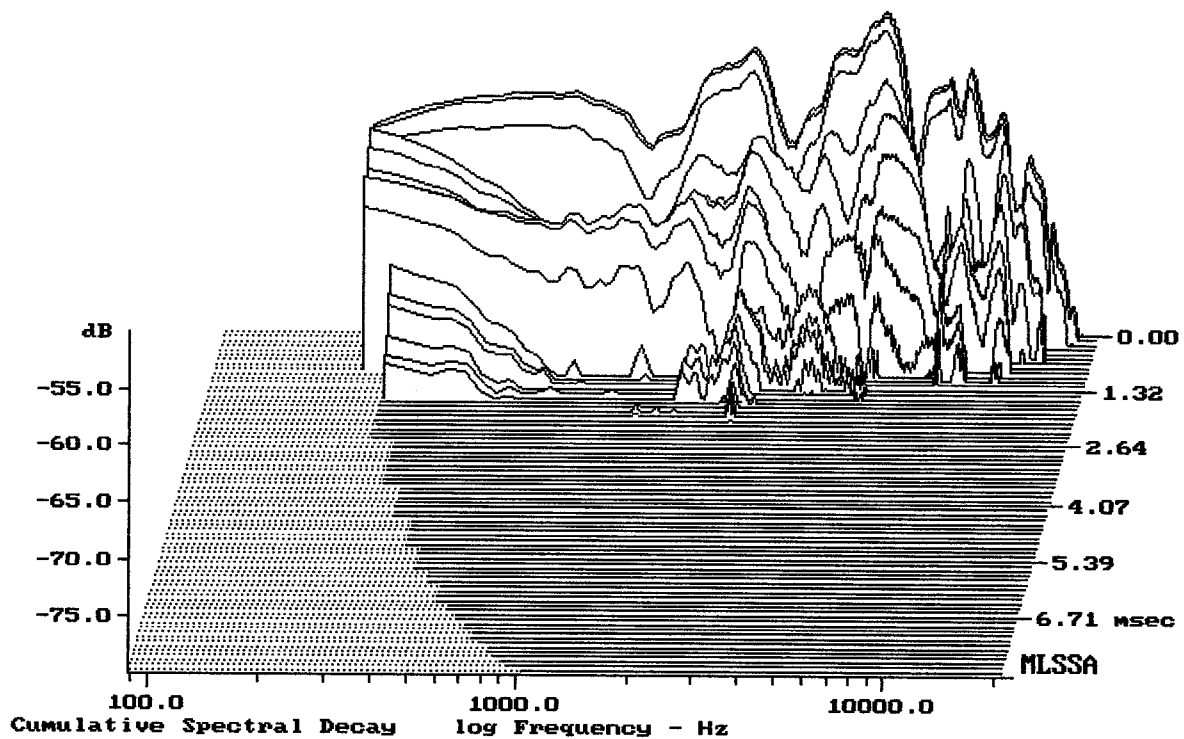

-78.58 dB, 2441 Hz (55), 1.980 msec (19)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.18	Ohms
2	Fs	74.75	Hz
3	Re	5.38	Ohms[dc]
4	Res	25.49	Ohms
5	Qms	2.45	
6	Qes	0.52	
7	Qts	0.43	
8	L1	0.23	mH
9	L2	0.67	mH
10	R2	3.06	Ohms
11	RMSE-load	0.22	Ohms
12	Vas(Sd)	4.59	liters
13	Mms	8.55	grams
14	Cms	530	$\mu\text{M}/\text{Newton}$
15	B1	6.47	Tesla-M
16	SPLref(Sd)	87.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (10.00 grams)

Area (Sd): 78.54 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.2% (-20% to -50% is recommended).

BEYMA 5MP60N

MLSSA: Parameters

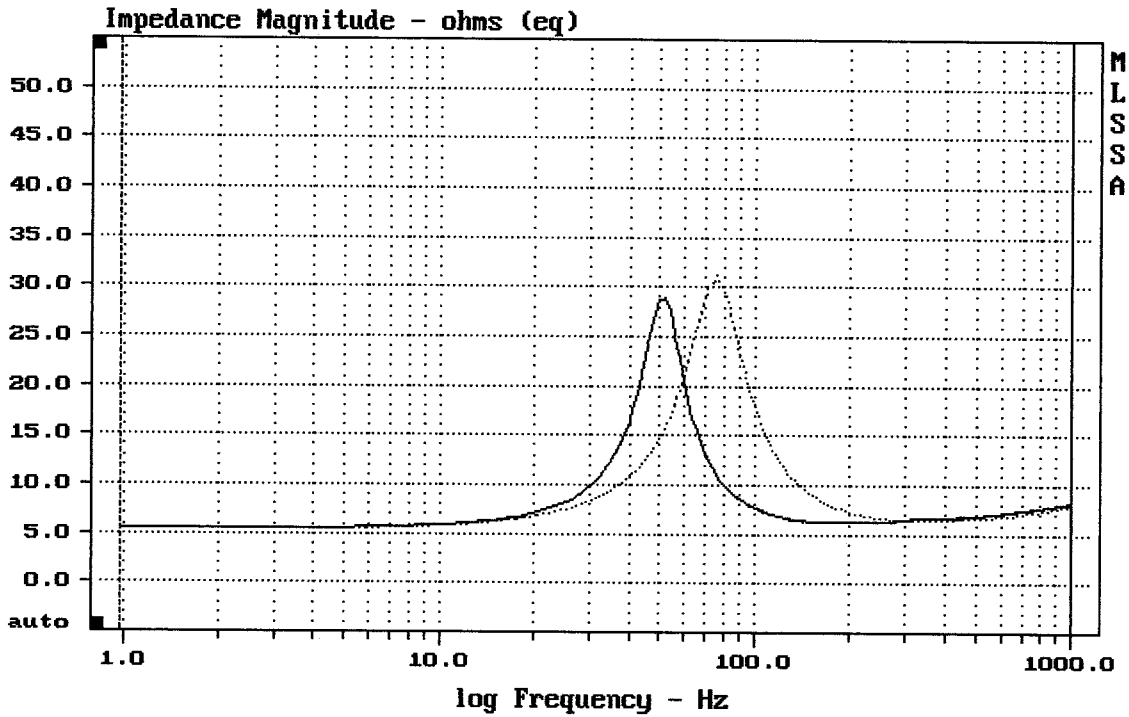

mean: 8.247, rms: 9.198, std: 4.074, max: 31.18, min: 5.449

MLSSA: Frequency Domain