


Level (67:7002 Hz) = 90.09 dB SPL/watt (16 ohms, @1.00 meters)

BEYMA 8WOOFER/P

MLSSA: Frequency Domain

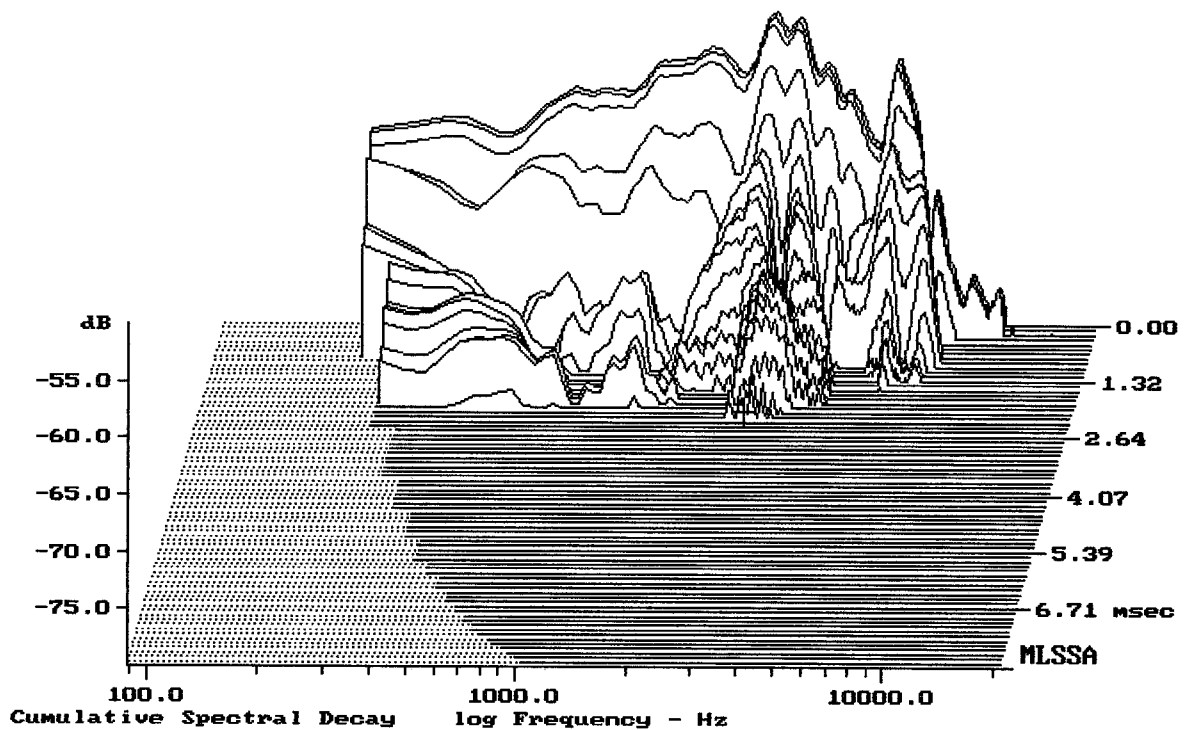

-79.55 dB, 2700 Hz (61), 2.200 msec (21)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	39.78	Hz
3	Re	10.45	Ohms[dc]
4	Res	42.45	Ohms
5	Qms	3.42	
6	Qes	0.84	
7	Qts	0.68	
8	L1	0.55	mH
9	L2	1.15	mH
10	R2	4.96	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	54.30	liters
13	Mms	18.93	grams
14	Cms	846	$\mu\text{M}/\text{Newton}$
15	B1	7.66	Tesla-M
16	SPLref(Sd)	87.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.4% (-20% to -50% is recommended).

BEYMA 8WOOFER/P

MLSSA: Parameters

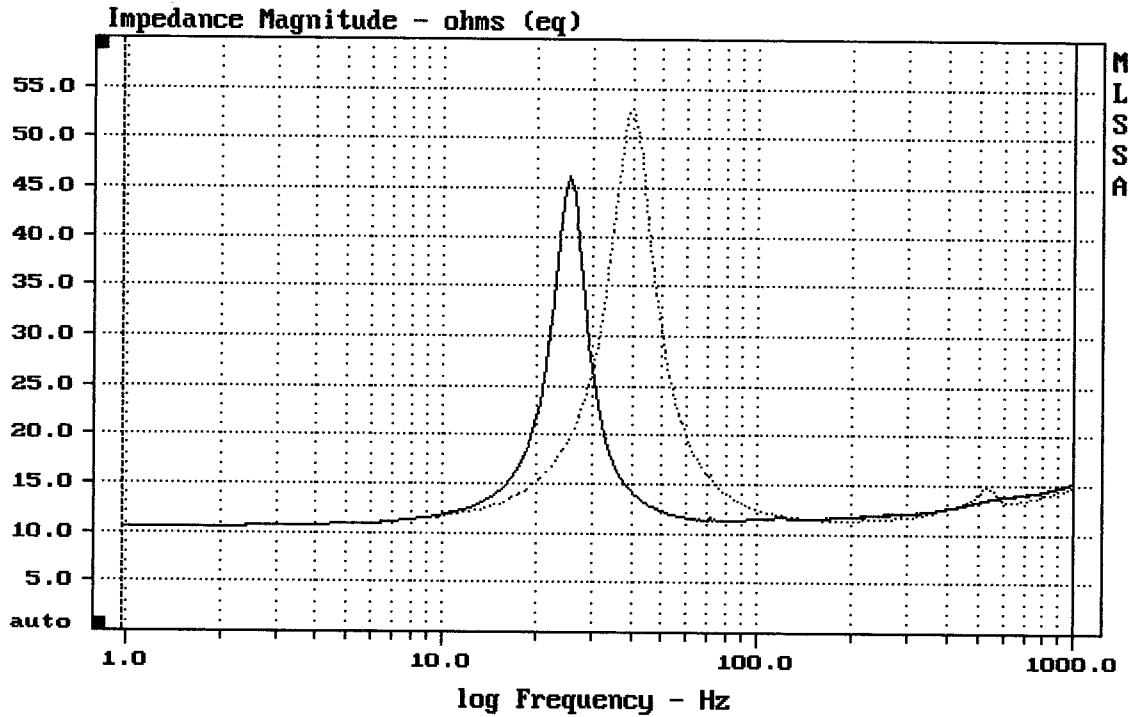

mean: 13.91, rms: 14.6, std: 4.429, max: 52.64, min: 10.5

MLSSA: Frequency Domain