

MLSSA SPD 4.W #960903-3057-3075

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.99	Ohms	
2	Fs	89.58	Hz	
3	Re	4.93	Ohms[dc]	
4	Res	133.56	Ohms	
5	Qms	8.12		
6	Qes	0.30		
7	Qts	0.29		
8	L1	0.03	mH	
9	L2	1.19	mH	
10	R2	7.02	Ohms	
11	RMSE-load	0.93	Ohms	
12	Vas(Sd)	14.74	liters	
13	Mms	13.77	grams	
14	Cms	229	$\mu\text{M}/\text{Newton}$	
15	B1	11.29	Tesla-M	
16	SPLref(Sd)	97.3	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (40.00 grams)

Area (Sd): 214.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -49.2% (-20% to -50% is recommended).

SOLTON E8DUM

MLSSA: Parameters

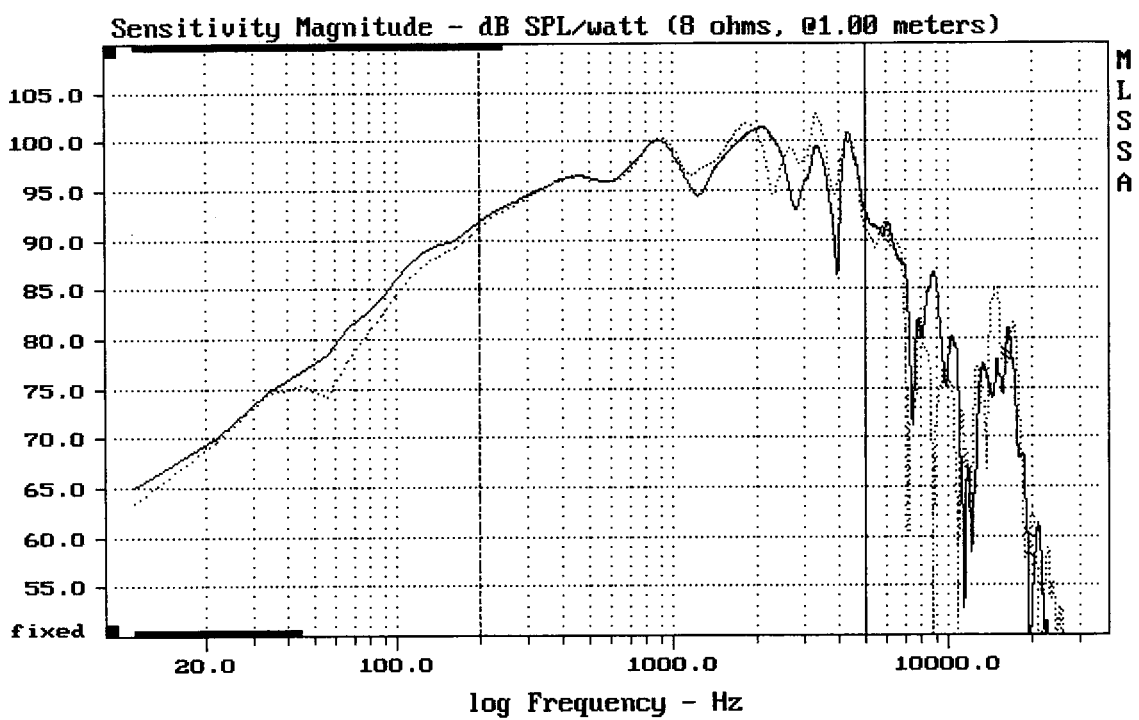

Level (200:5005 Hz) = 97.89 dB SPL/watt (8 ohms, @1.00 meters)

SOLTON E8DUM