

MLSSA SPO 4.W #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	80.24	Hz
3	Re	5.60	Ohms[dc]
4	Res	72.31	Ohms
5	Qms	4.03	
6	Qes	0.31	
7	Qts	0.29	
8	L1	0.06	mH
9	L2	1.22	mH
10	R2	4.81	Ohms
11	RMSE-load	0.51	Ohms
12	Vas(Sd)	15.83	liters
13	Mms	15.96	grams
14	Cms	246	$\mu\text{M}/\text{Newton}$
15	B1	12.01	Tesla-M
16	SPLref(Sd)	96.0	dBIRe1
17	Rub-index	0.00	


Method: Mass-loaded (40.00 grams)
 DCR mode: Measure (-0.27 ohms)

Area (Sd): 213.82 sq cm
 QC file: CLOSED

Analysis successful. Shift in Fs = -45.0% (-20% to -50% is recommended).


CR.8M

MLSSA: Parameters

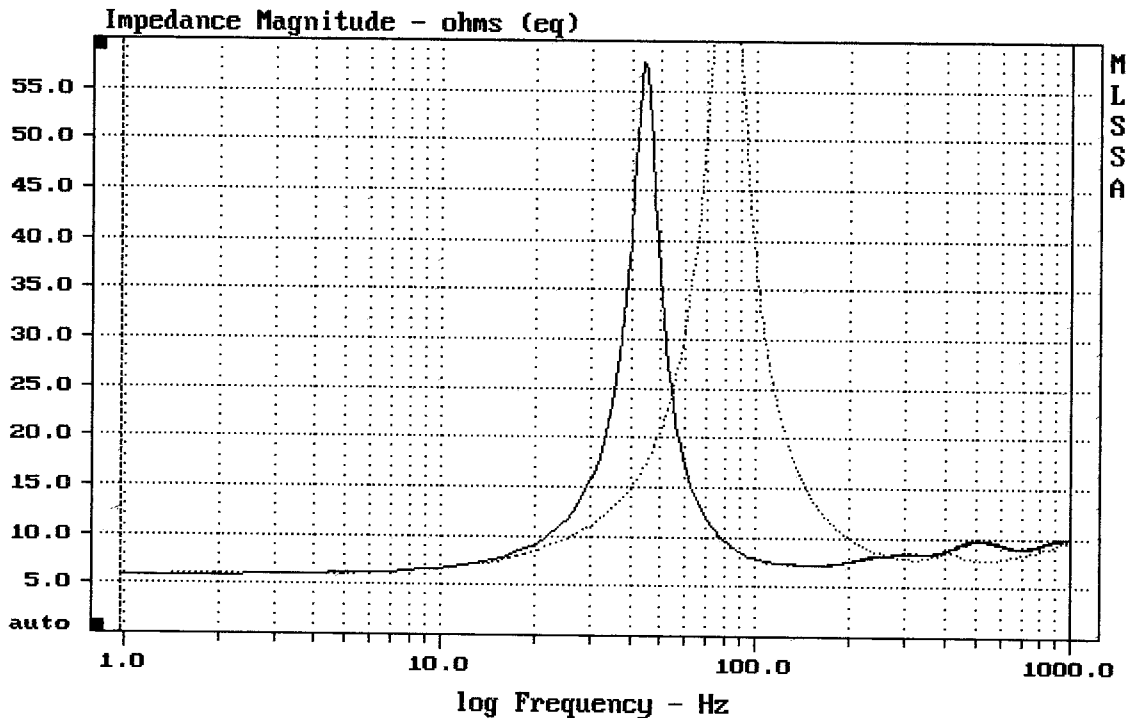

CURSOR: dy = -0.370044 x = 1000.9766 (1025)

MLSSA: Frequency Domain

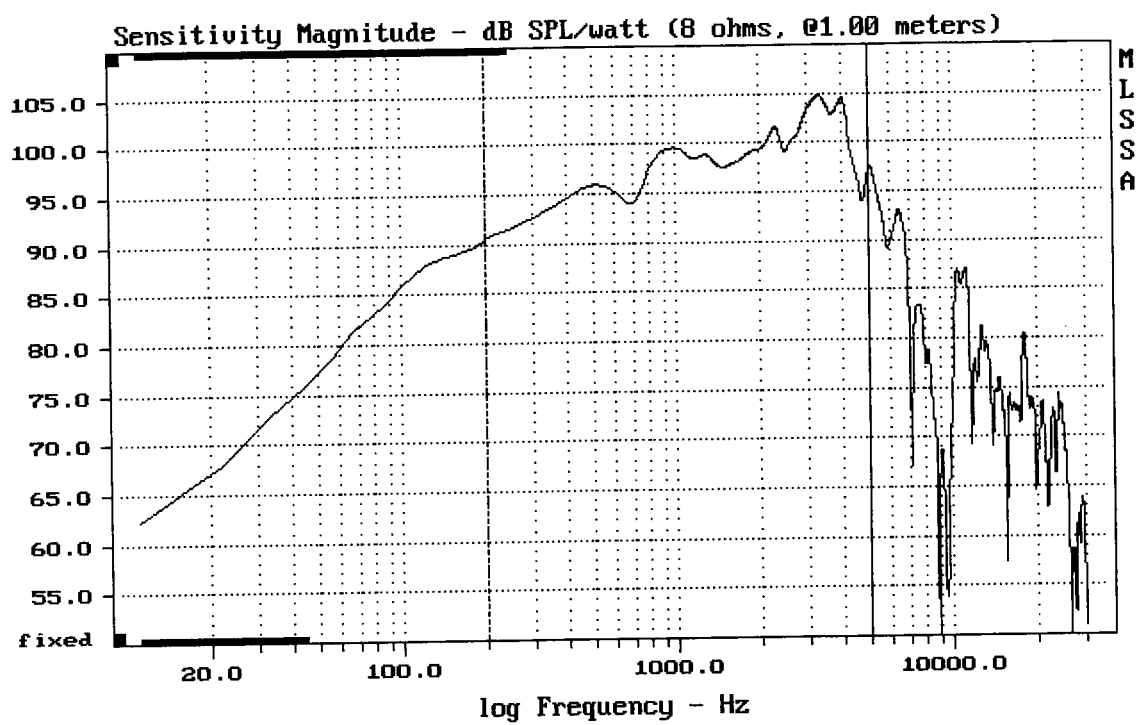

Level (200:5005 Hz) = 98.77 dB SPL/watt (8 ohms, @1.00 meters)

CRESC.8M