


Level (300:6004 Hz) = 97.46 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE LA6 CBMR

MLSSA: Frequency Domain

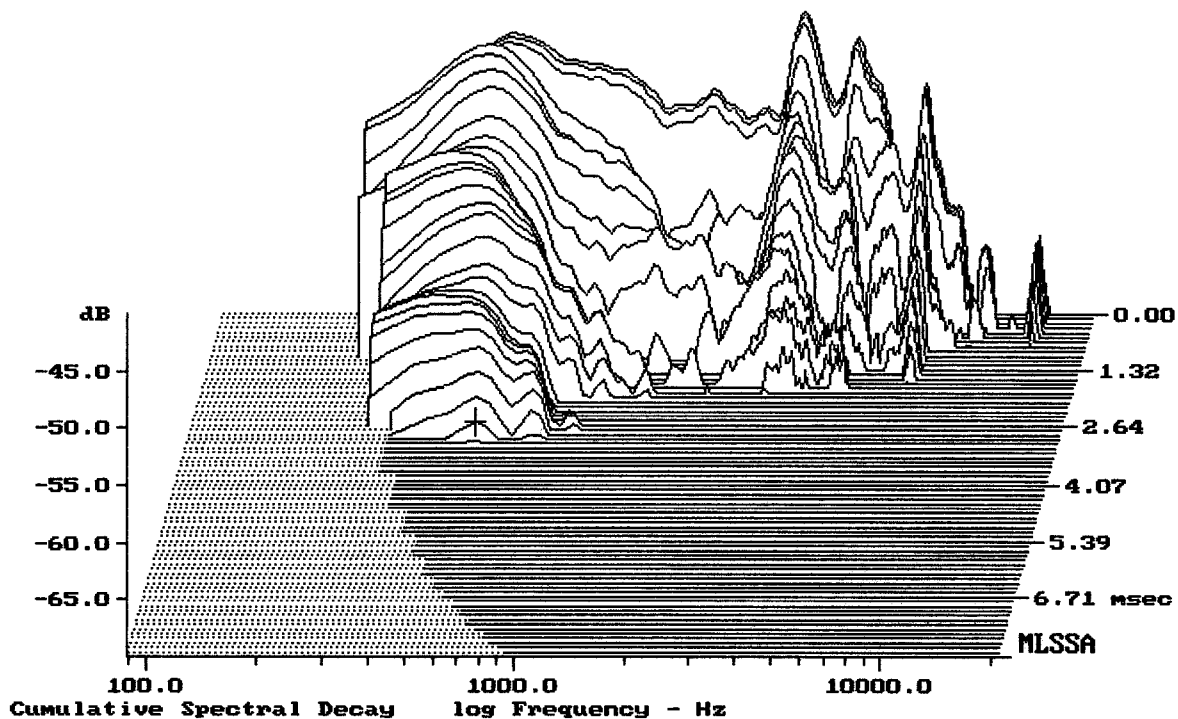

-68.46 dB, 533 Hz (12), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.60	Ohms
2	Fs	449.84	Hz
3	Re	6.12	Ohms[dc]
4	Res	42.03	Ohms
5	Qms	9.75	
6	Qes	1.42	
7	Qts	1.24	
8	L1	0.40	mH
9	L2	0.55	mH
10	R2	6.26	Ohms
11	RMSE-load	1.78	Ohms
12	Vas(Sd)	0.36	liters
13	Mms	7.68	grams
14	Cms	16	$\mu\text{M}/\text{Newton}$
15	Bl	9.67	Tesla-M
16	SPLref(Sd)	95.4	dB[Re]
17	Rub-index	0.19	

Method: Mass-loaded (10.00 grams)

Area (Sd): 125.00 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.2% (-20% to -50% is recommended).

EMINENCE LA6 CBMR

MLSSA: Parameters

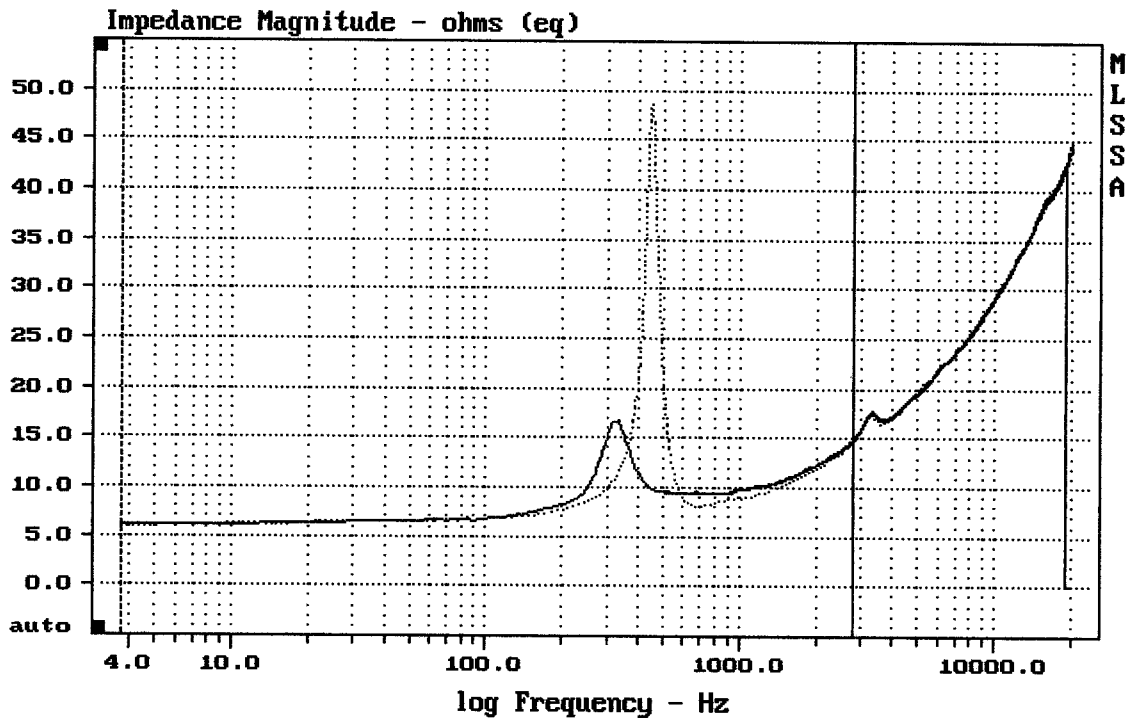

mean: 11.72, rms: 12.87, std: 5.332, max: 48.48, min: 5.901

MLSSA: Frequency Domain