


Level (100:5504 Hz) = 93.73 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTA PRO 8

MLSSA: Frequency Domain

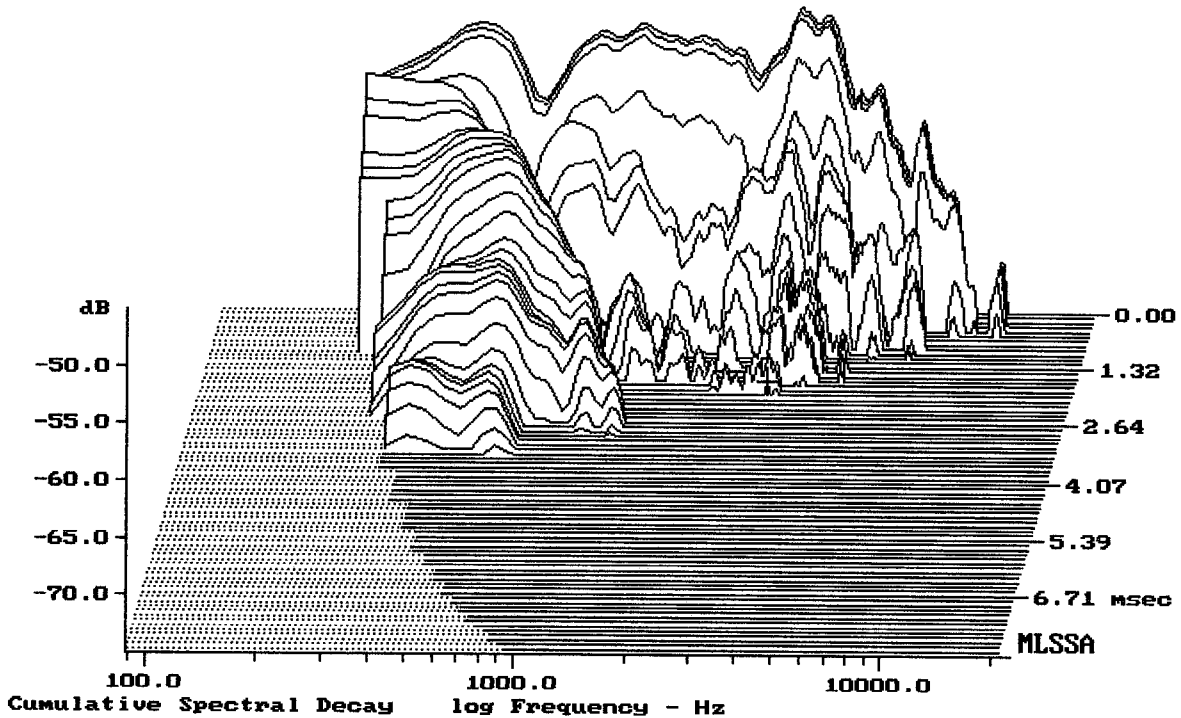

-73.82 dB, 3107 Hz (70), 1.980 msec (19)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	69.21	Hz
3	Re	5.52	Ohms[dc]
4	Res	168.59	Ohms
5	Qms	7.62	
6	Qes	0.25	
7	Qts	0.24	
8	L1	0.66	mH
9	L2	1.34	mH
10	R2	5.29	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	20.66	liters
13	Mms	17.40	grams
14	Cms	304	$\mu\text{M}/\text{Newton}$
15	B1	12.94	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (20.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.1% (-20% to -50% is recommended).

EMINENCE DELTA PRO 8

MLSSA: Parameters

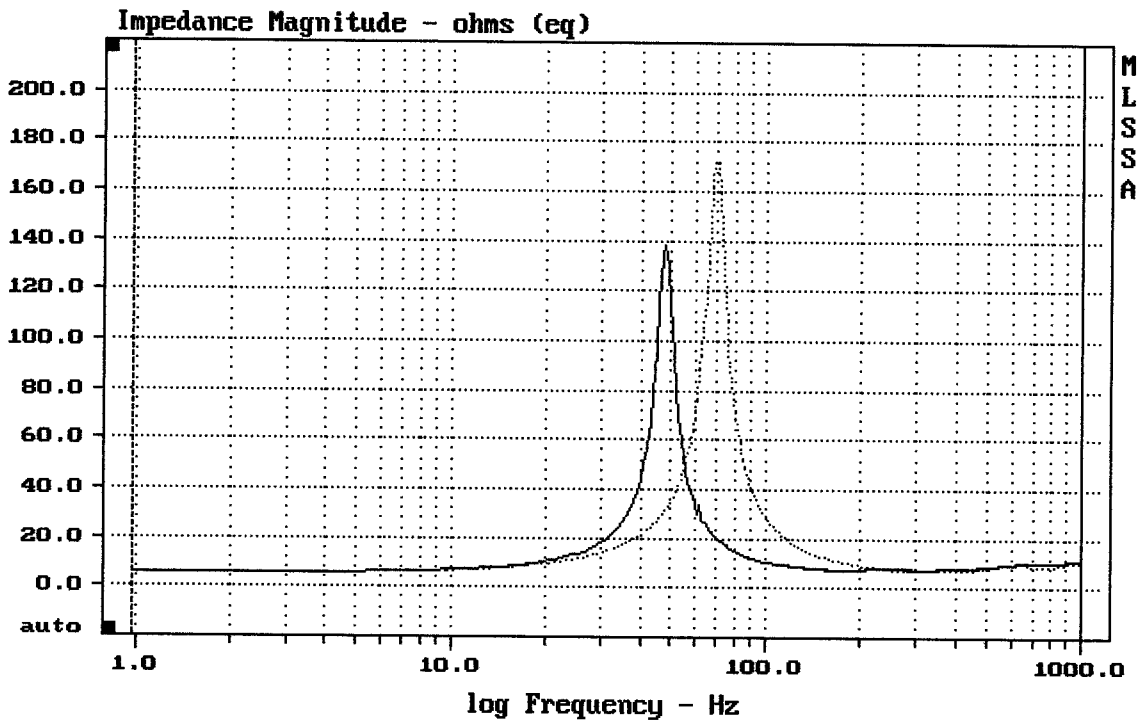

mean: 12.98, rms: 21.97, std: 17.73, max: 172.9, min: 5.686

MLSSA: Frequency Domain