


Level (100:5305 Hz) = 95.83 dB SPL/watt (8 ohms, @1.00 meters)

CLAB-60

MLSSA: Frequency Domain

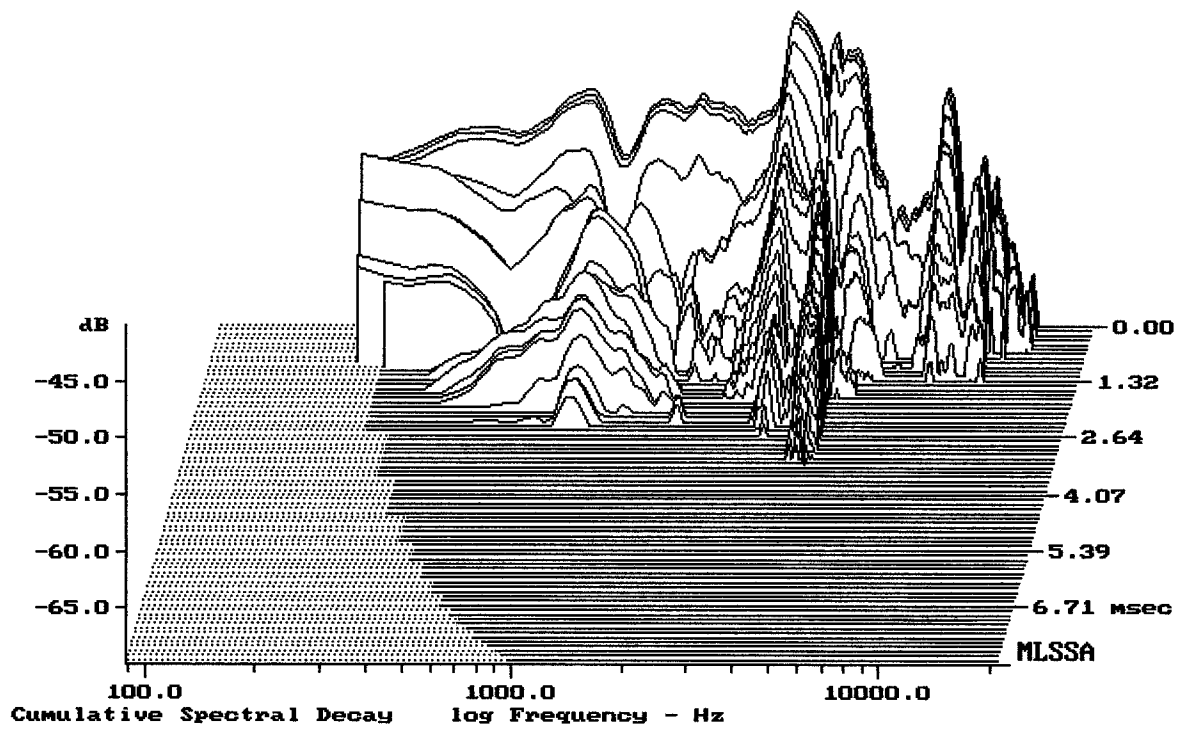

-69.30 dB, 4350 Hz (98), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.49	Ohms
2	Fs	75.51	Hz
3	Re	5.57	Ohms[dc]
4	Res	164.78	Ohms
5	Qms	16.02	
6	Qes	0.54	
7	Qts	0.52	
8	L1	0.17	mH
9	L2	0.59	mH
10	R2	5.85	Ohms
11	RMSE-load	0.95	Ohms
12	Vas(Sd)	21.35	liters
13	Mms	13.36	grams
14	Cms	332	$\mu\text{M}/\text{Newton}$
15	Bl	8.07	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.19 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.8% (-20% to -50% is recommended).

CLA 8-60

MLSSA: Parameters

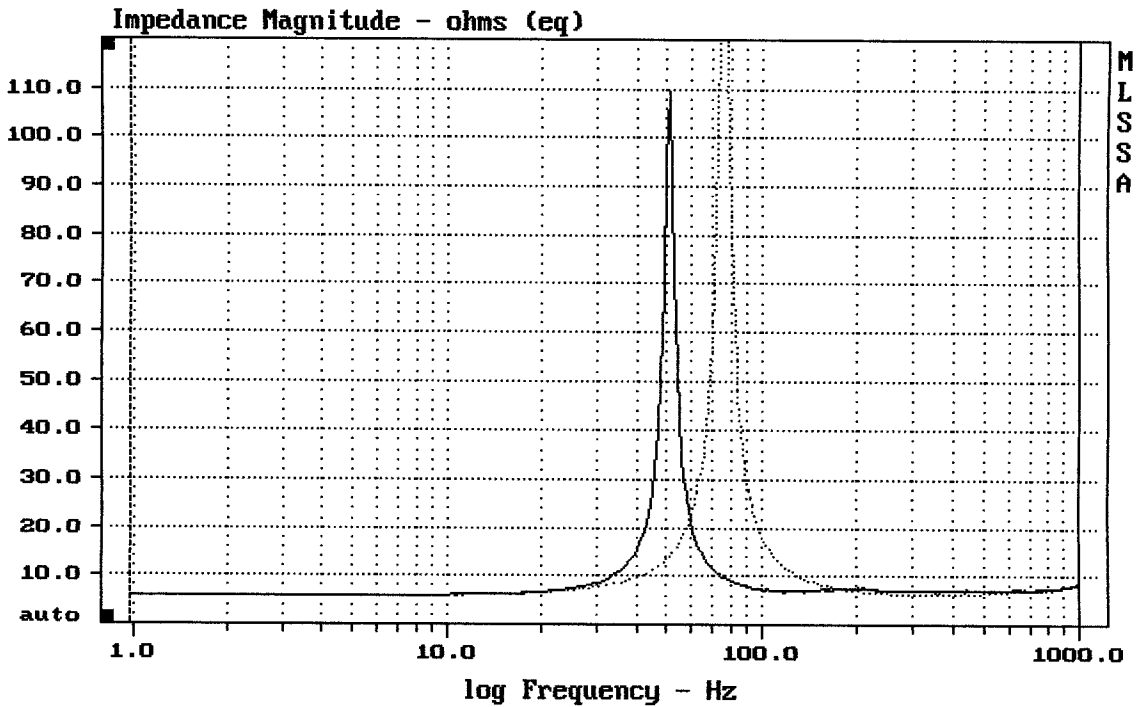

mean: 9.293, rms: 15.97, std: 12.99, max: 171.2, min: 5.754

MLSSA: Frequency Domain