


Level (67:7002 Hz) = 85.88 dB SPL/watt (4 ohms, @1.00 meters)

6" FROM AM100T

MLSSA: Frequency Domain

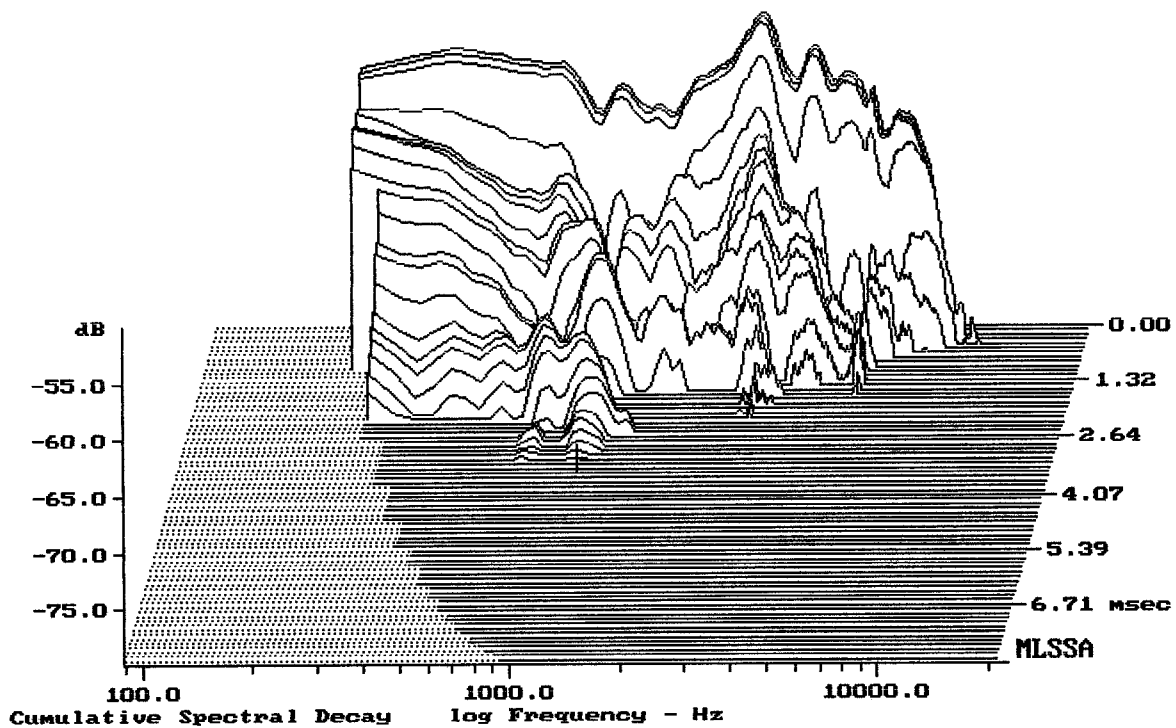

-79.88 dB, 1065 Hz (24), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.27	Ohms
2	Fs	67.15	Hz
3	Re	3.61	Ohms[dc]
4	Res	42.01	Ohms
5	Qms	6.02	
6	Qes	0.52	
7	Qts	0.48	
8	L1	0.51	mH
9	L2	0.77	mH
10	R2	4.16	Ohms
11	RMSE-load	0.35	Ohms
12	Vas(Sd)	11.57	liters
13	Mms	12.01	grams
14	Cms	468	$\mu\text{M}/\text{Newton}$
15	B1	5.95	Tesla-M
16	SPLref(Sd)	90.1	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (20.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.4% (-20% to -50% is recommended).

6" 6H28E AM100T YORKVILLE

MLSSA: Parameters

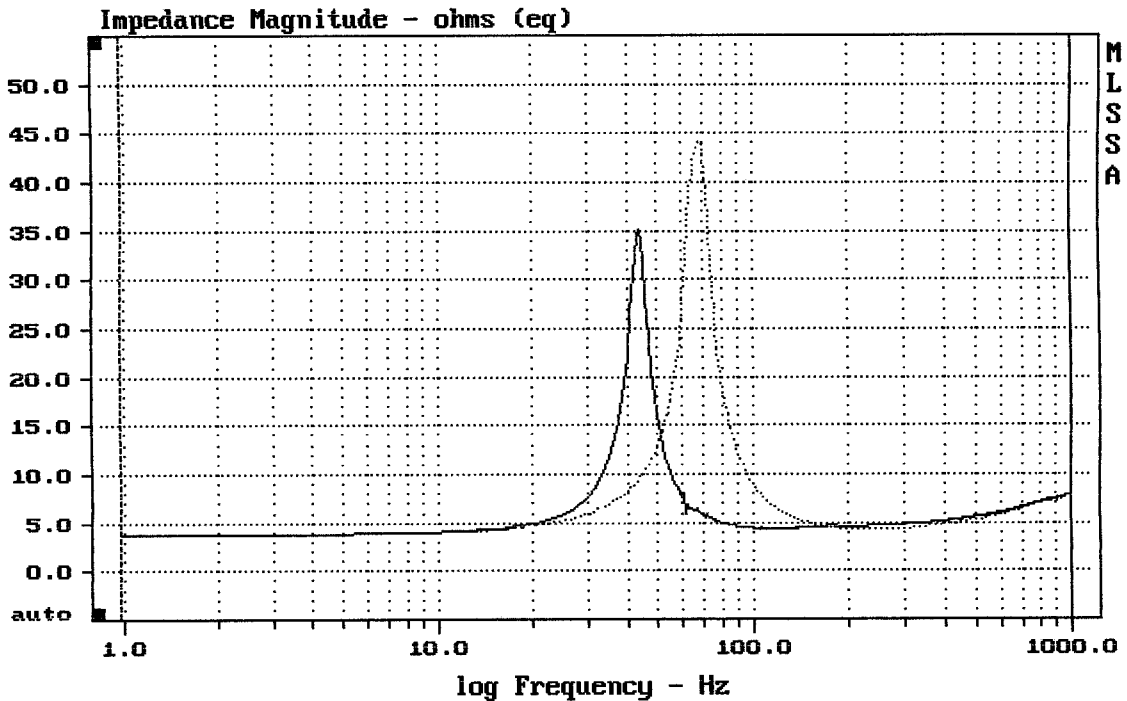

mean: 6.714, rms: 8.131, std: 4.586, max: 44.07, min: 3.755

MLSSA: Frequency Domain