


Level (100:5005 Hz) = 94.38 dB SPL/watt (8 ohms, @1.00 meters)

MB8N251

MLSSA: Frequency Domain

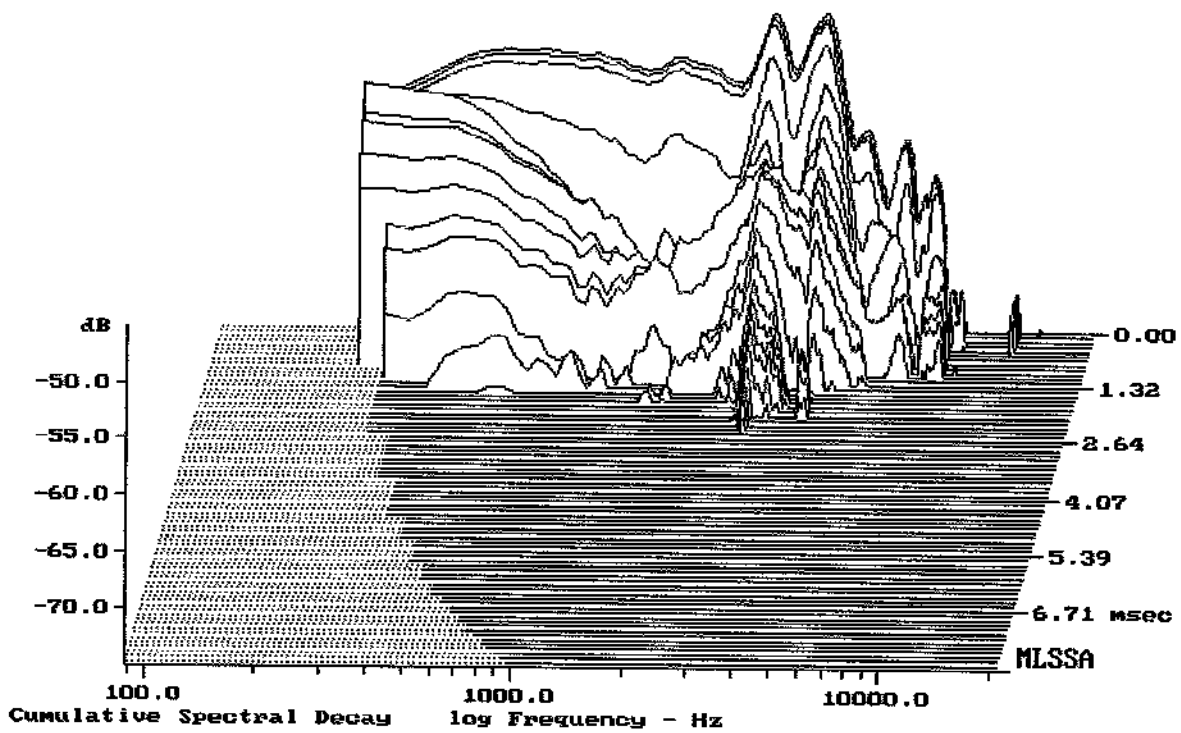

-74.02 dB, 2752 Hz (62), 2.420 msec (23)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	83.80	Hz
3	Re	5.33	Ohms[dc]
4	Res	65.29	Ohms
5	Qms	4.24	
6	Qes	0.35	
7	Qts	0.32	
8	L1	0.64	mH
9	L2	0.86	mH
10	R2	3.87	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	11.32	liters
13	Mms	21.66	grams
14	Cms	167	$\mu\text{M}/\text{Newton}$
15	Bl	13.25	Tesla-M
16	SPLref(Sd)	94.7	dB[Re]
17	Rub-index	0.14	

Method: Mass-loaded (20.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.3% (-20% to -50% is recommended).

MB8N251

MLSSA: Parameters

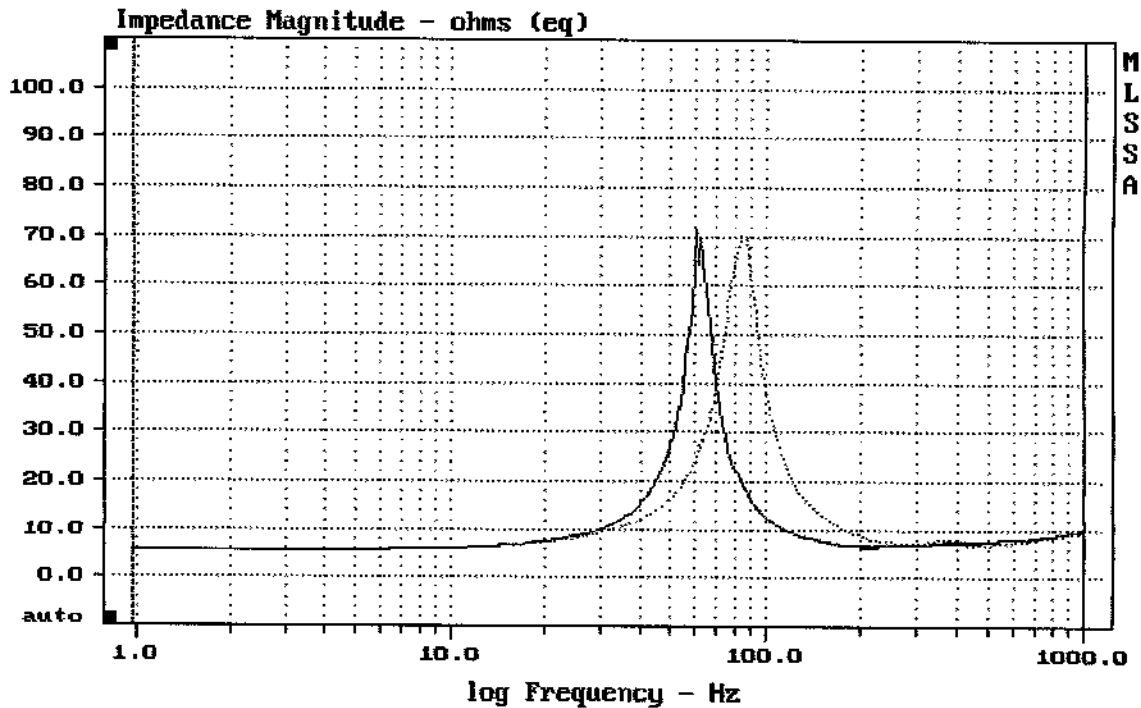

mean: 10.5, rms: 14.03, std: 9.298, max: 70.79, min: 5.582

MLSSA: Frequency Domain