


Level (78:9510 Hz) = 90.71 dB SPL/watt (4 ohms, @1.00 meters)

SELENIUM 8G1

MLSSA: Frequency Domain

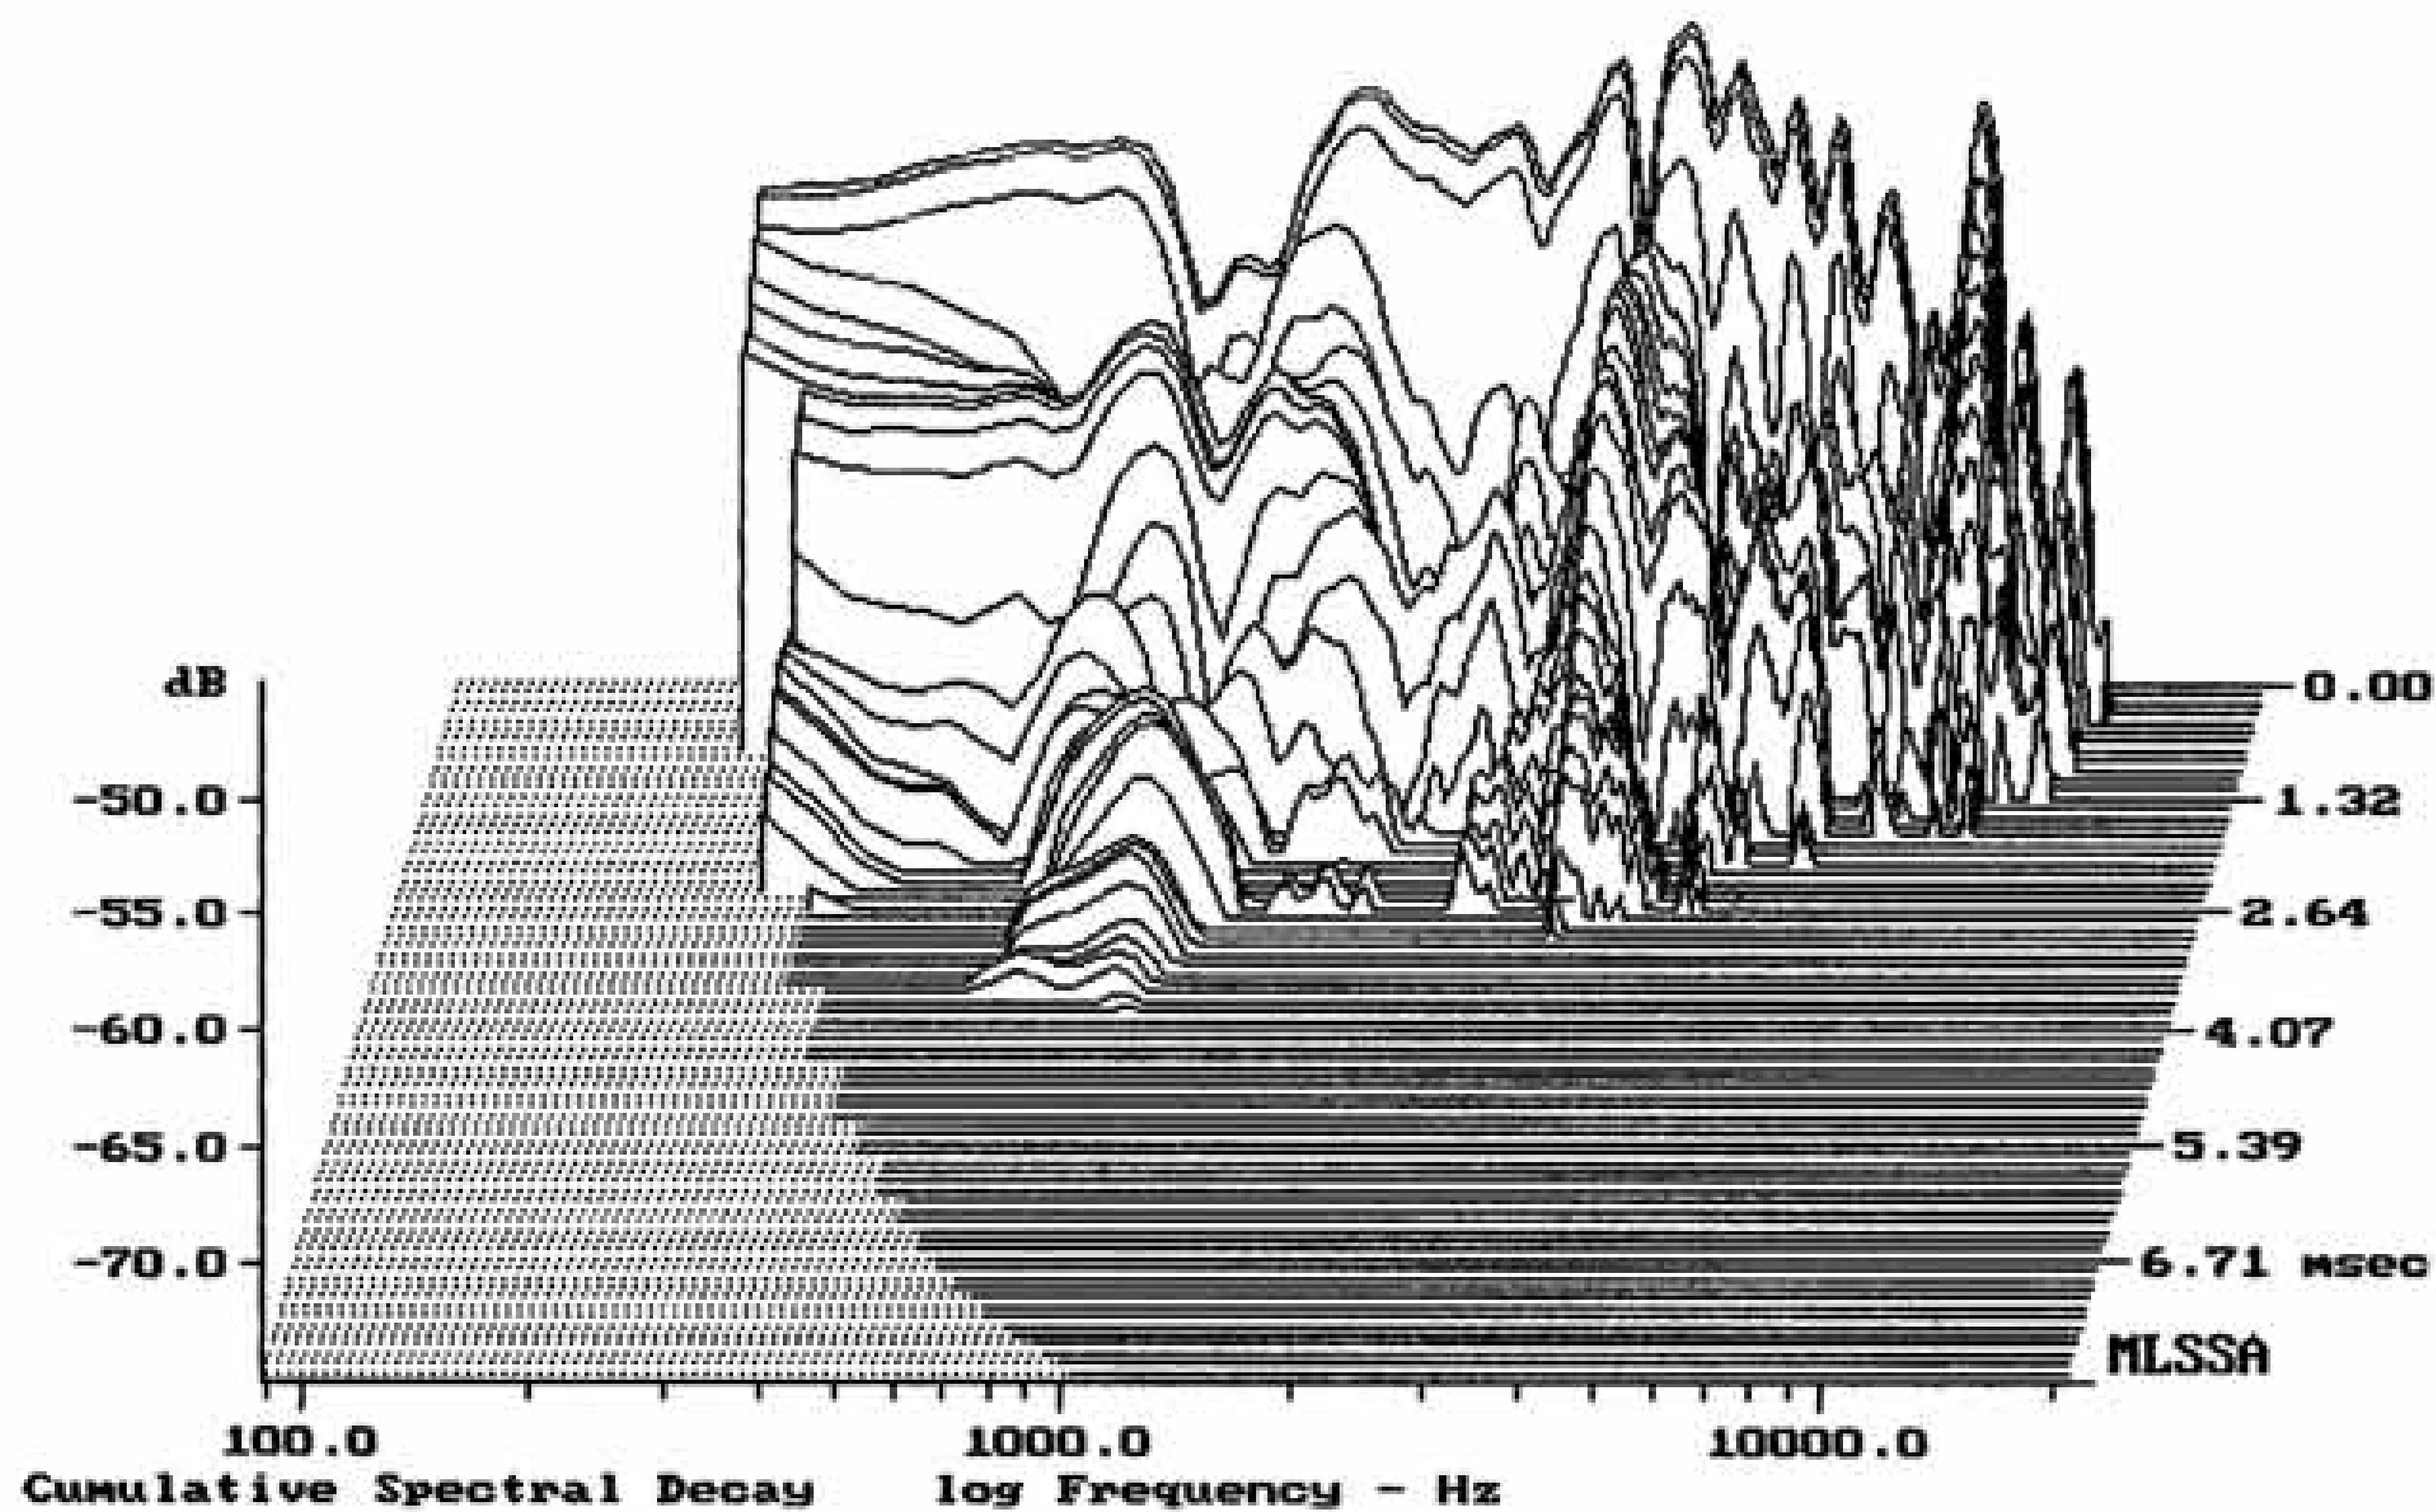

-73.70 dB, 3018 Hz (68), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.13	Ohms
2	Fs	99.54	Hz
3	Re	3.06	Ohms[dc]
4	Res	11.48	Ohms
5	Qms	9.16	
6	Qes	2.44	
7	Qts	1.93	
8	L1	0.20	mH
9	L2	0.25	mH
10	R2	1.24	Ohms
11	RMSE-load	0.15	Ohms
12	Vas(Sd)	18.06	liters
13	Mms	9.10	grams
14	Cms	281	$\mu\text{M}/\text{Newton}$
15	B1	2.67	Tesla-M
16	SPLref(Sd)	90.5	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (10.00 grams)

Area (Sd): 214.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.5% (-20% to -50% is recommended).

SELENIUM 8G1

MLSSA: Parameters

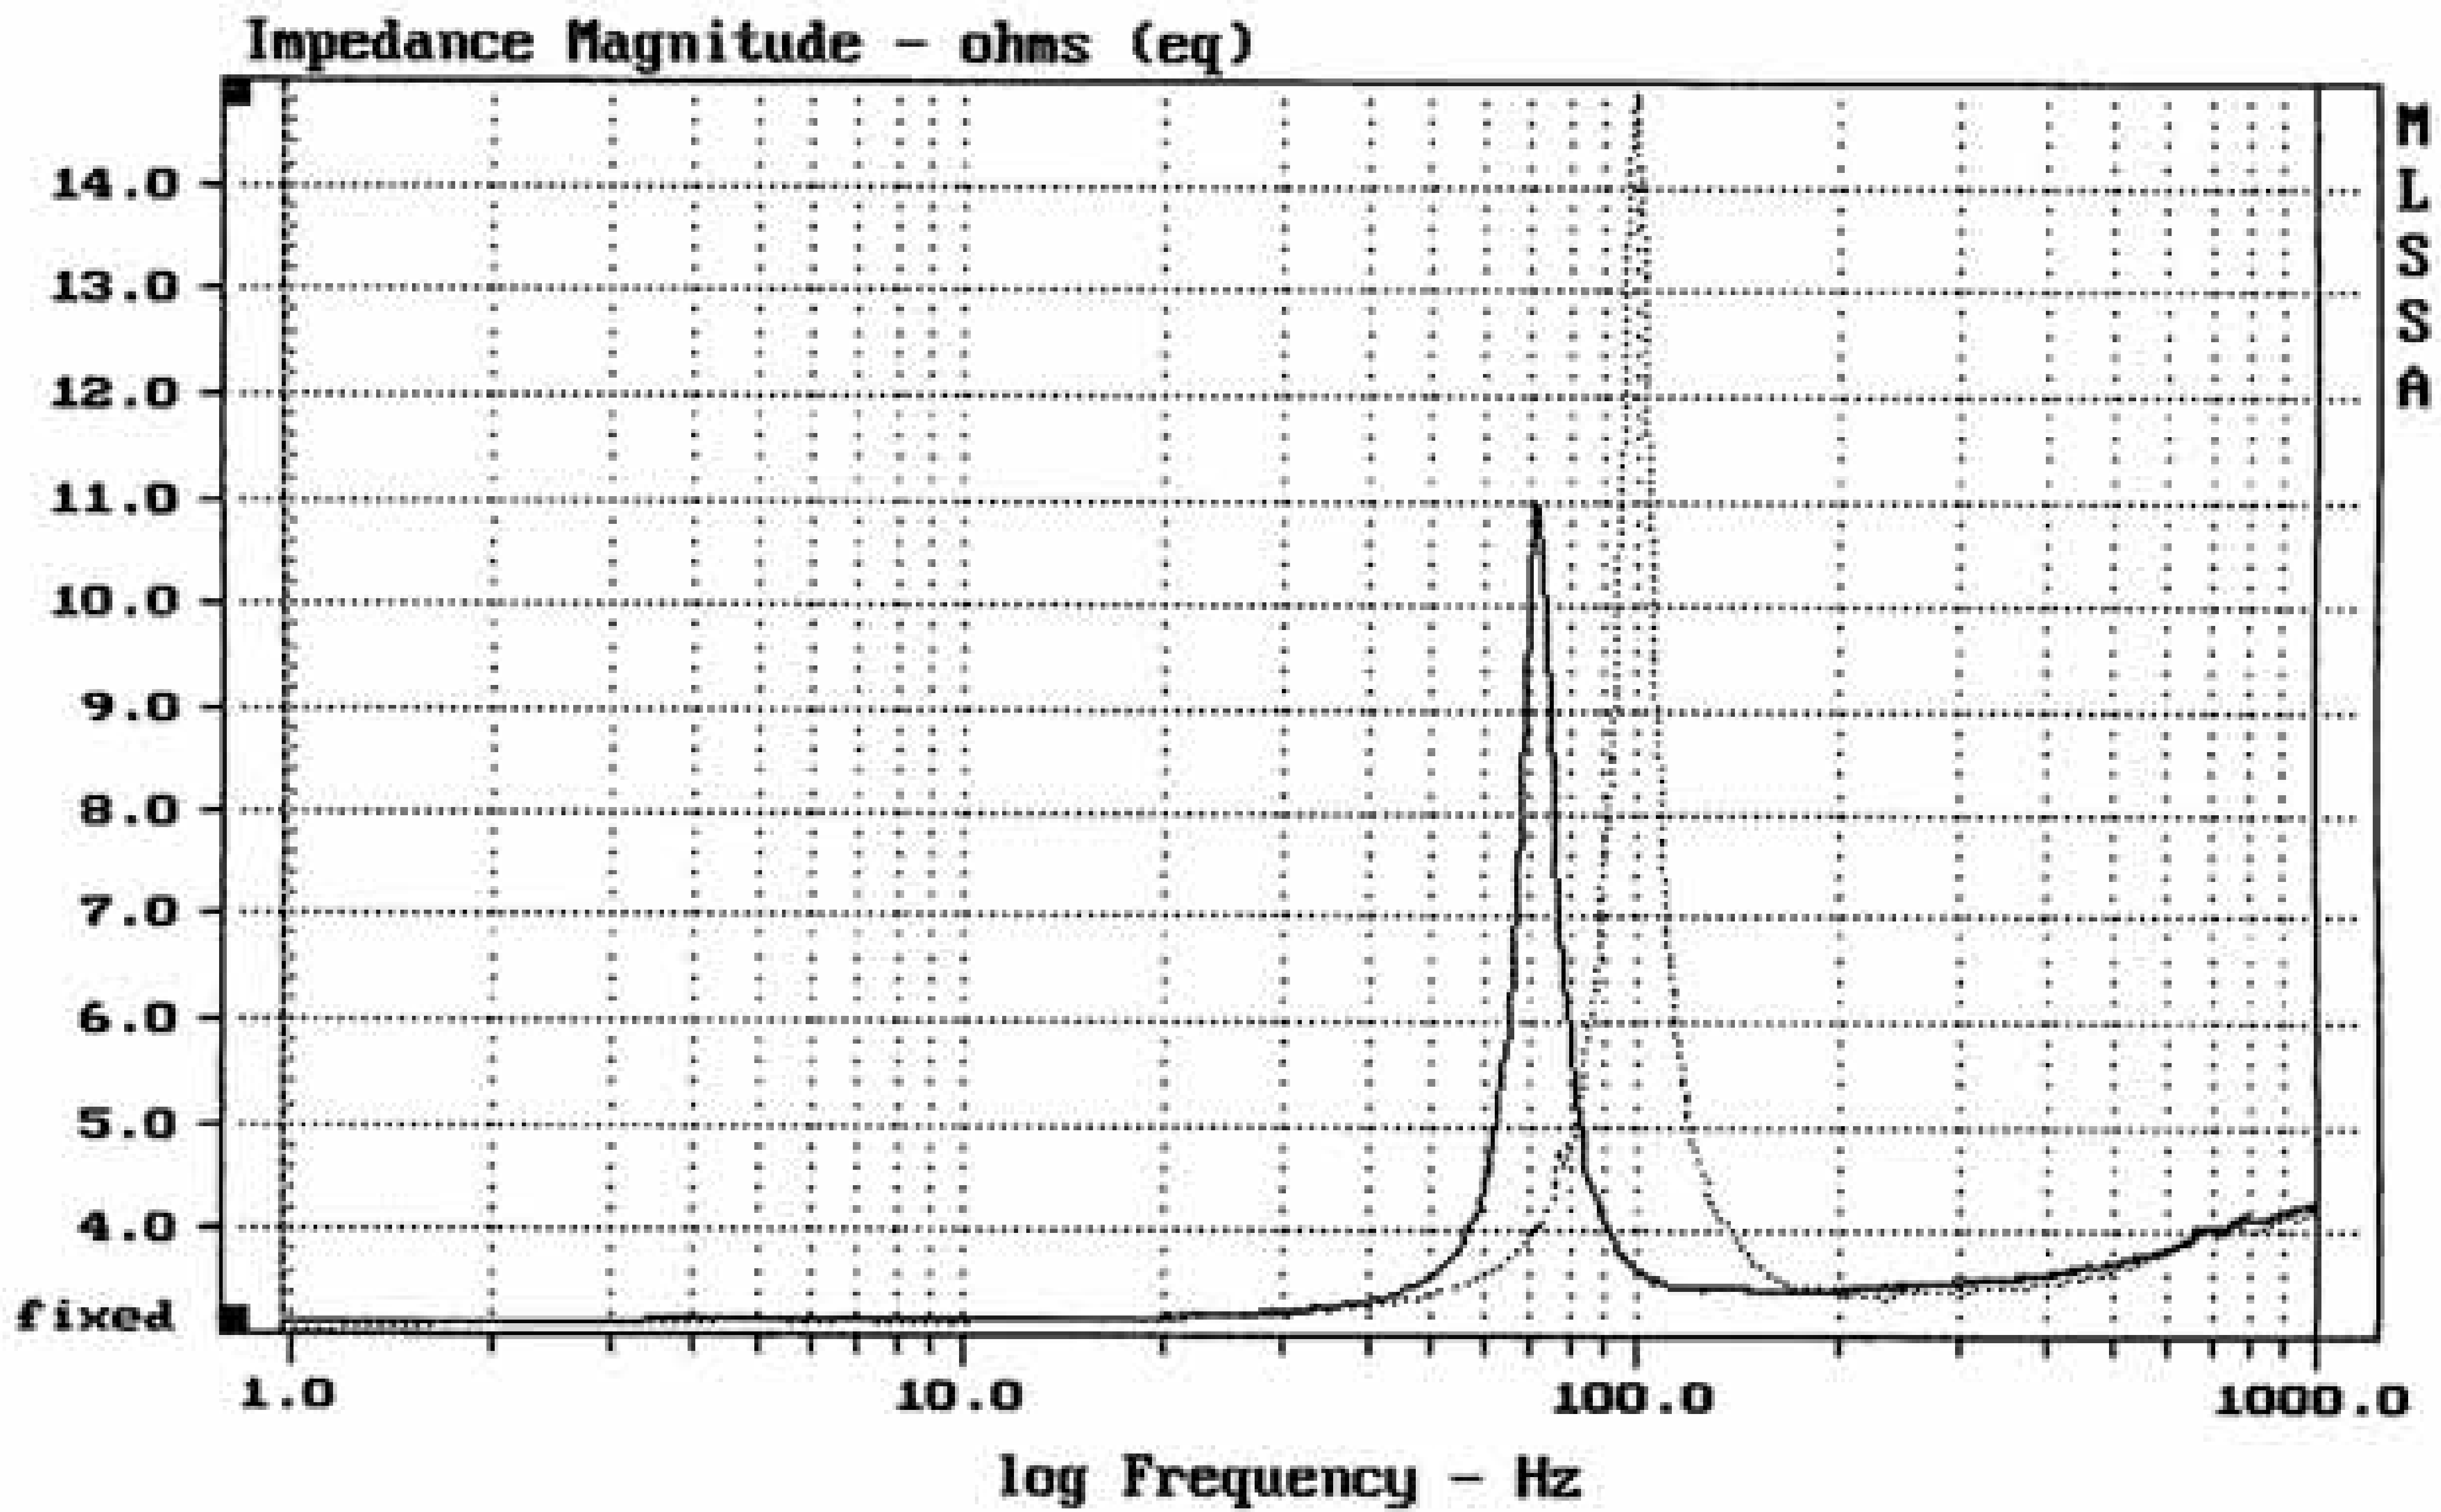

mean: 3.957, rms: 4.126, std: 1.171, max: 14.87, min: 3.024

DITO

MLSSA: Frequency Domain