



MILAN s.r.l.

Legal headquarter

Head Office - Export Office:

20090 Cesano Boscone (MI) - Italia

Via Mascagni, 4

Tel. +39 02 90394556

Fax. +39 02 90394551

www.taskercables.com

Sales office and distribution center:

20090 Cusago - Milano - Italia

Viale Europa, 72 Str.F/12


Tel. +39 02 90 39 00 37

Fax. +39 02 90 39 00 49

www.tasker.it

Technical form:

C278 Multipair cable with separately shielded and insulated pairs

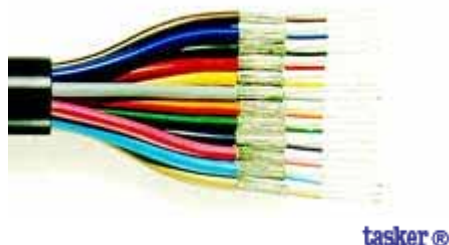

Technical characteristics:

Cond Number Nominal Section	8 x 2 x 0,08 mm²
Formation	12 x 0,10
External Dimension (mm)	12,2
External core (mm)	0,9
Conductor Resistance Ohm/Km ±5%	210
Operative Temperature (°C)	-15° / +70°
Capacity (pF/mt) core/core	120
Capacity (pF/mt) core/shield	200
Max operative Voltage V	AC 49V
Spool or Reel	100
Spool kind	B10
Weight Kg	18,5

Description:

Multipair cable with separately shielded and insulated pairs

100% spiral shields - Tinned copper

Conductors in tinned copper

Conductor insulation in PVC

Pair colours: white-brown, white-blue, white-black, white-red, white-yellow, white-grey, white-orange, white-green

Shield insulation in PVC

Sheath in PVC colour: black

Flexible cable for sound reproduction or electronics

Available colours:

■ Black