


Level (100:9999 Hz) = 91.02 dB SPL/watt (8 ohms, @1.00 meters)

SNDL38

MLSSA: Frequency Domain

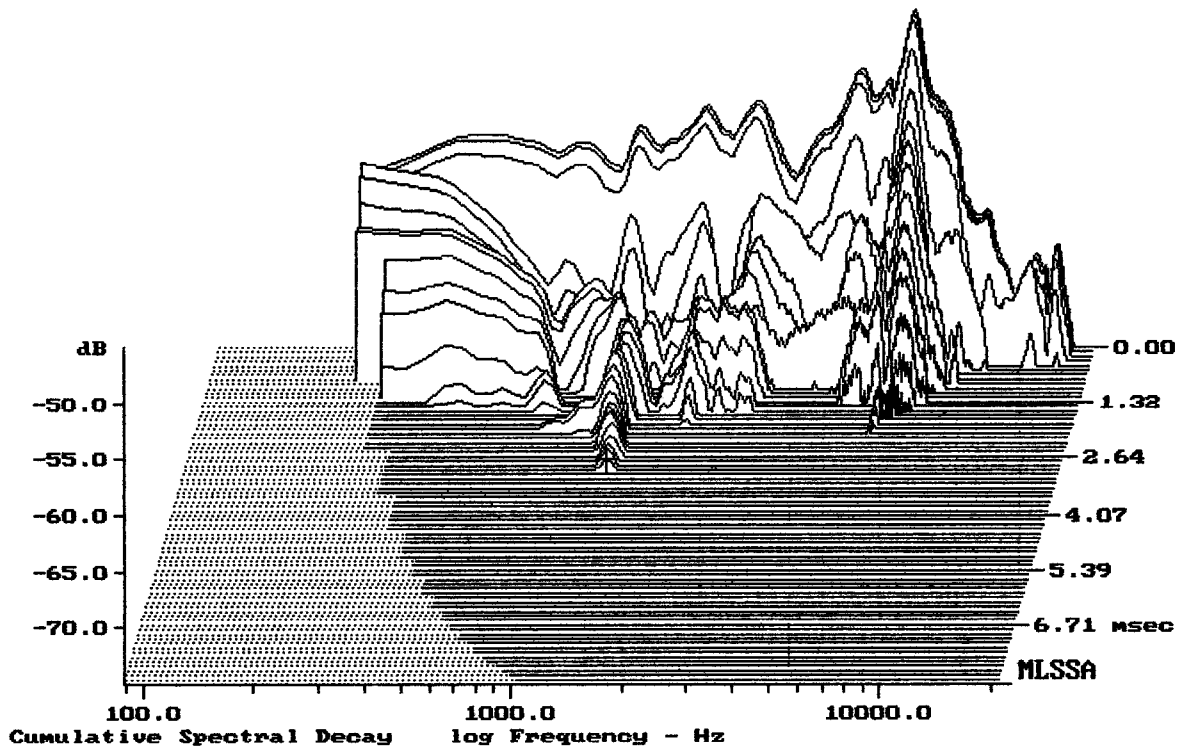

-74.01 dB, 1243 Hz (28), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	79.99	Hz
3	Re	5.57	Ohms[dc]
4	Res	147.09	Ohms
5	Qms	9.54	
6	Qes	0.36	
7	Qts	0.35	
8	L1	0.47	mH
9	L2	0.54	mH
10	R2	2.04	Ohms
11	RMSE-load	0.52	Ohms
12	Vas(Sd)	4.65	liters
13	Mms	8.97	grams
14	Cms	441	$\mu\text{M}/\text{Newton}$
15	B1	8.34	Tesla-M
16	SPLref(Sd)	90.0	dB[Re]
17	Rub-index	0.04	

Method: Mass-loaded (10.00 grams)

Area (Sd): 86.59 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.1% (-20% to -50% is recommended).

5NDL38

MLSSA: Parameters

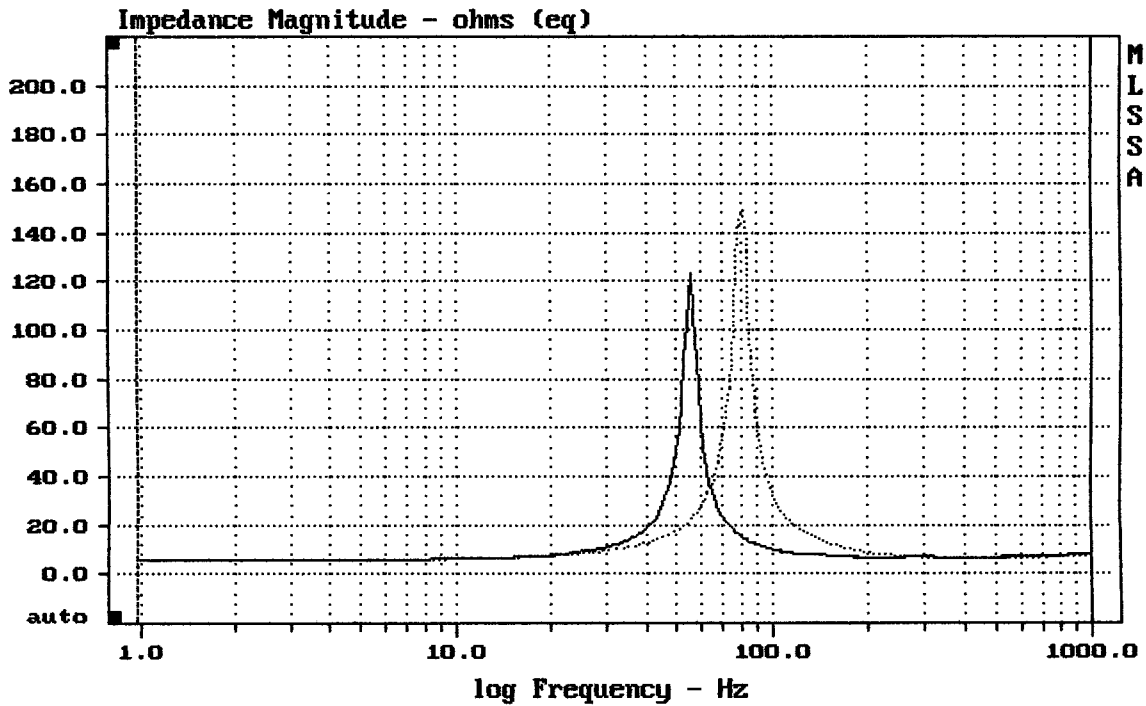

mean: 10.59, rms: 18.42, std: 15.07, max: 148.9, min: 5.578

MLSSA: Frequency Domain