


Level (100:4506 Hz) = 94.64 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 8

MLSSA: Frequency Domain

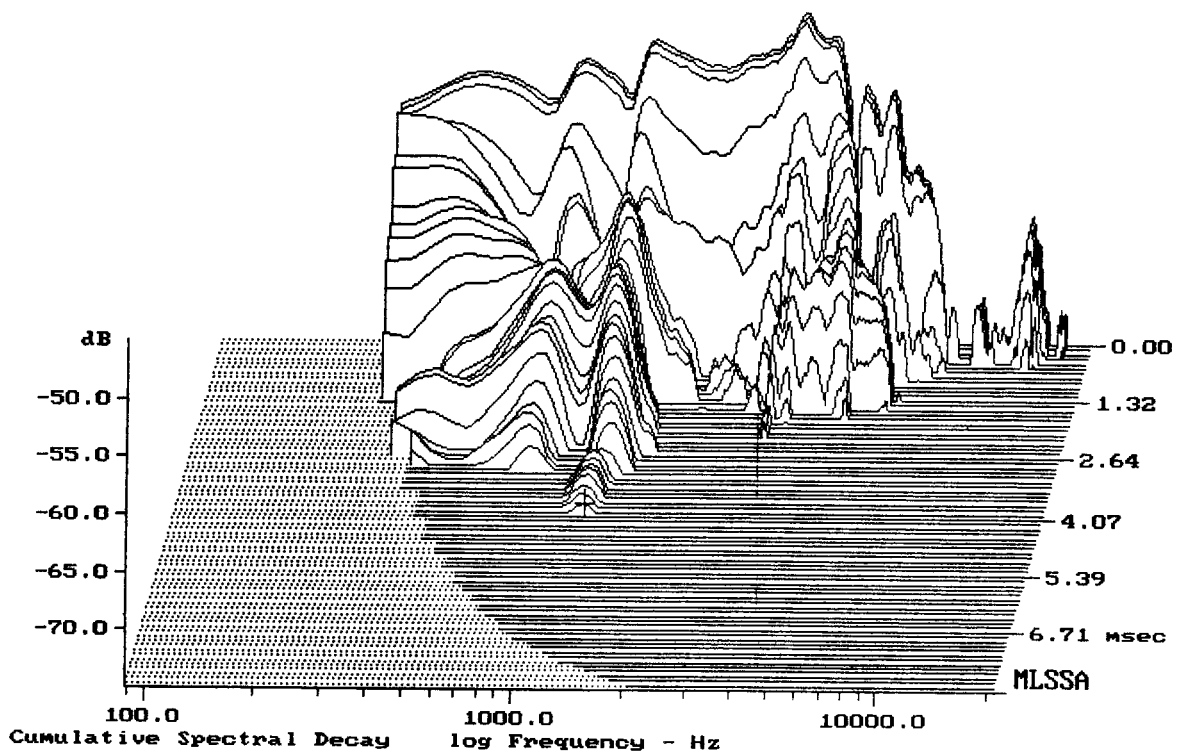

-74.19 dB, 1154 Hz (26), 3.960 msec (37)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	61.20	Hz
3	Re	5.99	Ohms[dc]
4	Res	102.82	Ohms
5	Qms	5.87	
6	Qes	0.34	
7	Qts	0.32	
8	L1	0.50	mH
9	L2	0.94	mH
10	R2	3.71	Ohms
11	RMSE-load	0.81	Ohms
12	Vas(Sd)	19.04	liters
13	Mms	22.82	grams
14	Cms	296	$\mu\text{M}/\text{Newton}$
15	B1	12.40	Tesla-M
16	SPLref(Sd)	92.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (25.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.2% (-20% to -50% is recommended).

EMINENCE BETA 8

MLSSA: Parameters

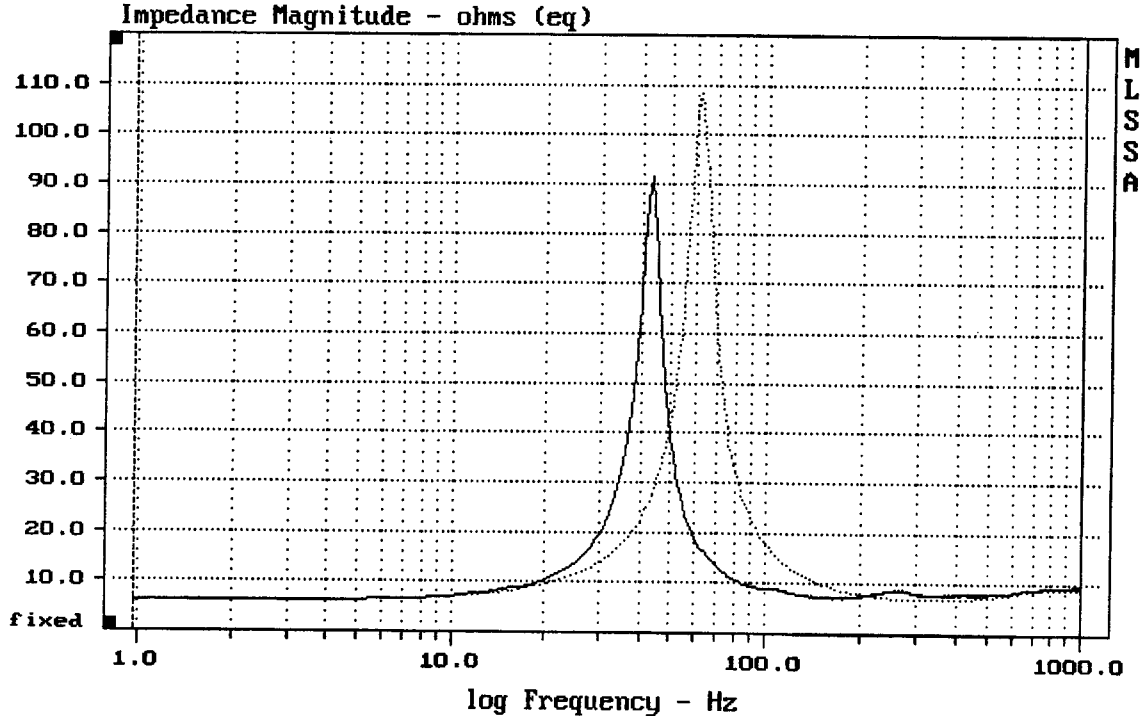

CURSOR: dy = -0.357206 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain