

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.51	Ohms
2	Fs	95.44	Hz
3	Re	6.09	Ohms[dc]
4	Res	58.15	Ohms
5	Qms	4.06	
6	Qes	0.43	
7	Qts	0.39	
8	L1	0.33	mH
9	L2	0.46	mH
10	R2	10.79	Ohms
11	RMSE-load	1.94	Ohms
12	Vas(Sd)	6.36	liters
13	Mms	9.25	grams
14	Cms	301	$\mu\text{M}/\text{Newton}$
15	Bl	8.91	Tesla-M
16	SPLref(Sd)	93.0	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (10.00 grams)

Area (Sd): 122.72 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.2% (-20% to -50% is recommended).


EMINENCE LA6-MR

MLSSA: Parameters

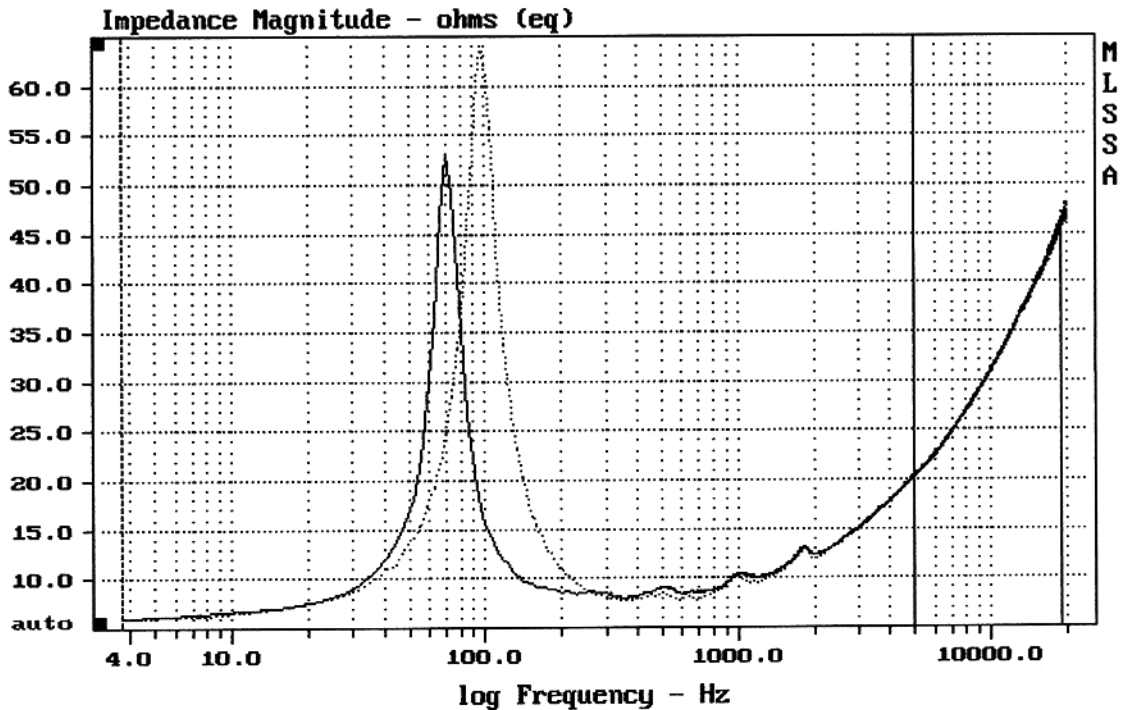

mean: 14.3, rms: 15.21, std: 5.178, max: 63.98, min: 6.027

MLSSA: Frequency Domain

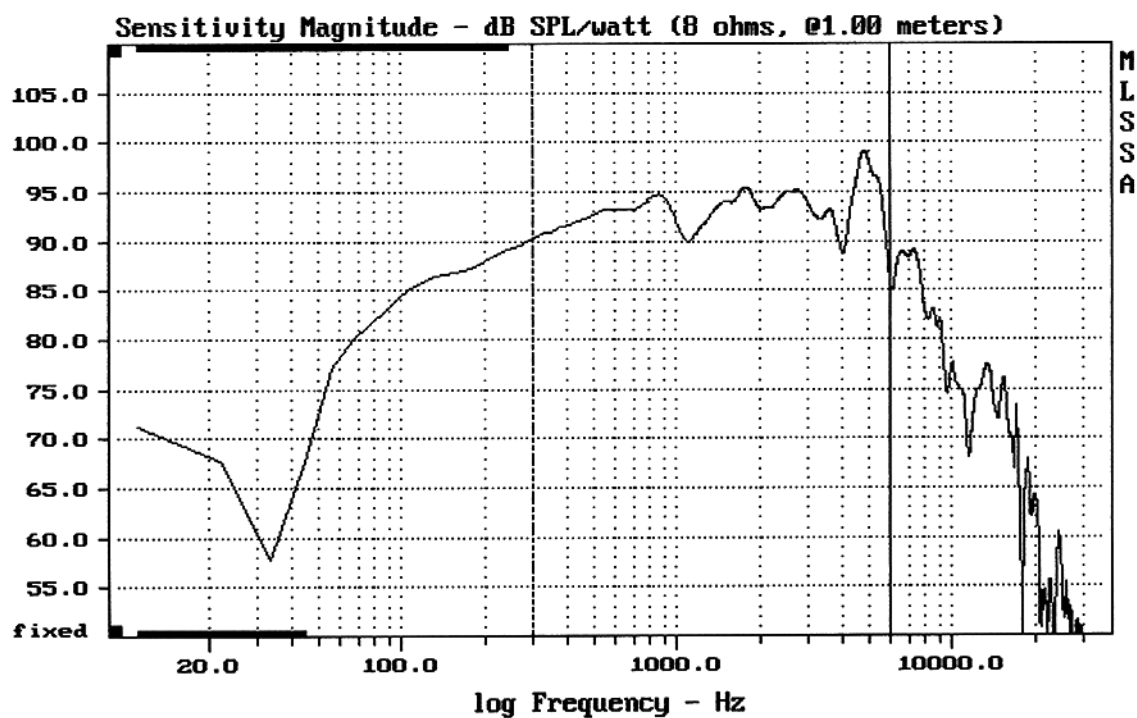

Level (300:6004 Hz) = 93.61 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE LA6-MR

MLSSA: Frequency Domain

