

MLSSA SPO 4.0D #960903-3057-307E

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	124.90	Hz
3	Re	5.43	Ohms[dc]
4	Res	36.43	Ohms
5	Qms	2.73	
6	Qes	0.41	
7	Qts	0.35	
8	L1	0.44	mH
9	L2	0.59	mH
10	R2	1.48	Ohms
11	RMSE-load	1.42	Ohms
12	Vas(Sd)	5.93	liters
13	Mms	8.65	grams
14	Cms	188	$\mu\text{M}/\text{Newton}$
15	B1	9.51	Tesla-M
16	SPLref(Sd)	96.4	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (10.00 grams)

Area (Sd): 150.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).


RCF L6L380

MLSSA: Parameters

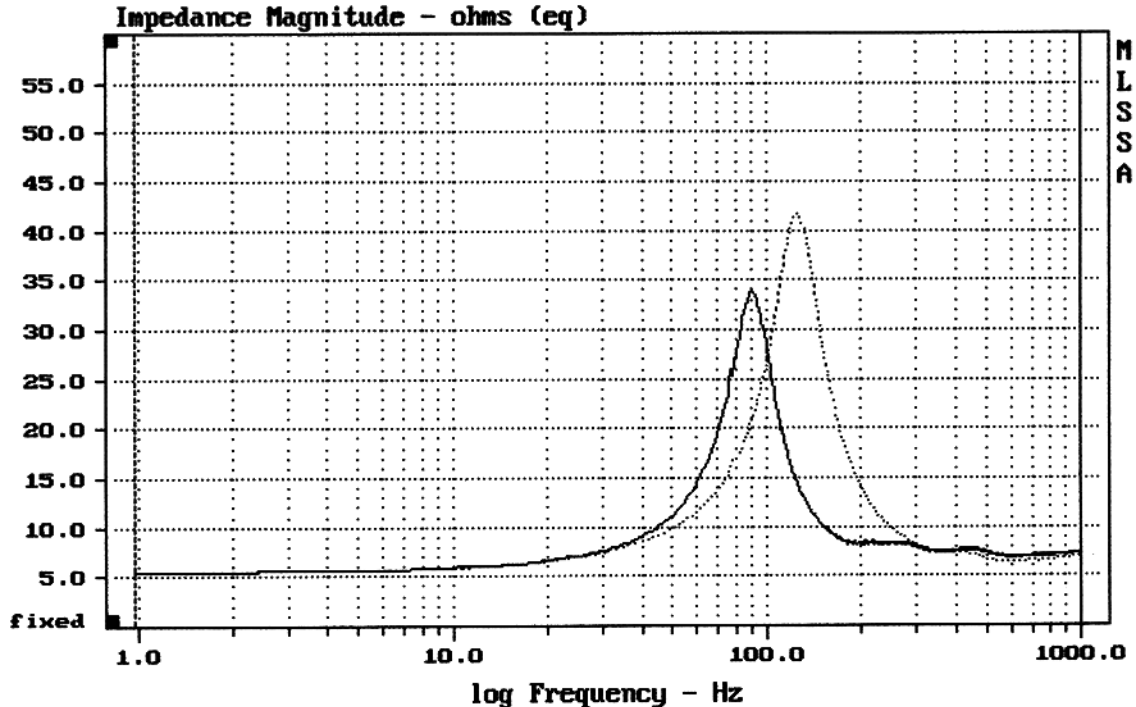

mean: 9.772, rms: 12.1, std: 7.143, max: 41.62, min: 5.517

MLSSA: Frequency Domain

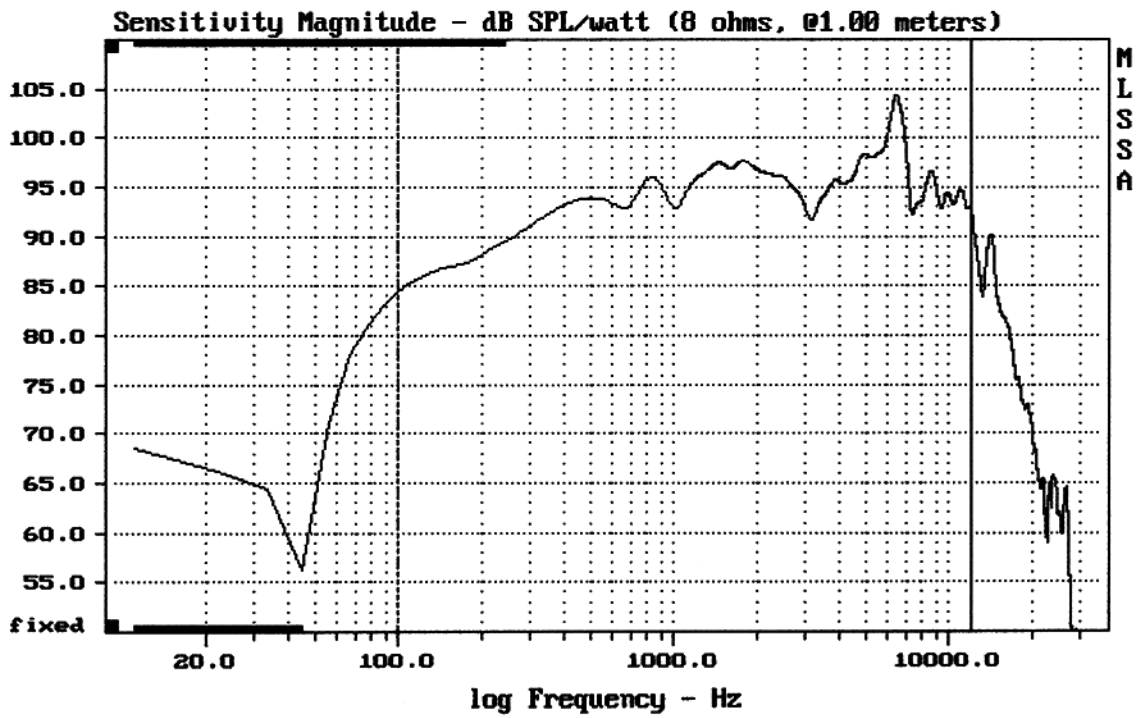

Level (100:1196 Hz) = 95.09 dB SPL/watt (8 ohms, @1.00 meters)

RCF L6L380

MLSSA: Frequency Domain

