

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	79.72	Hz
3	Re	6.24	Ohms[dc]
4	Res	43.07	Ohms
5	Qms	3.29	
6	Qes	0.48	
7	Qts	0.42	
8	L1	0.60	mH
9	L2	1.14	mH
10	R2	4.71	Ohms
11	RMSE-load	1.05	Ohms
12	Vas(Sd)	15.82	liters
13	Mms	17.12	grams
14	Cms	233	$\mu\text{M}/\text{Newton}$
15	B1	10.59	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.8% (-20% to -50% is recommended).


RCF L8S800

MLSSA: Parameters

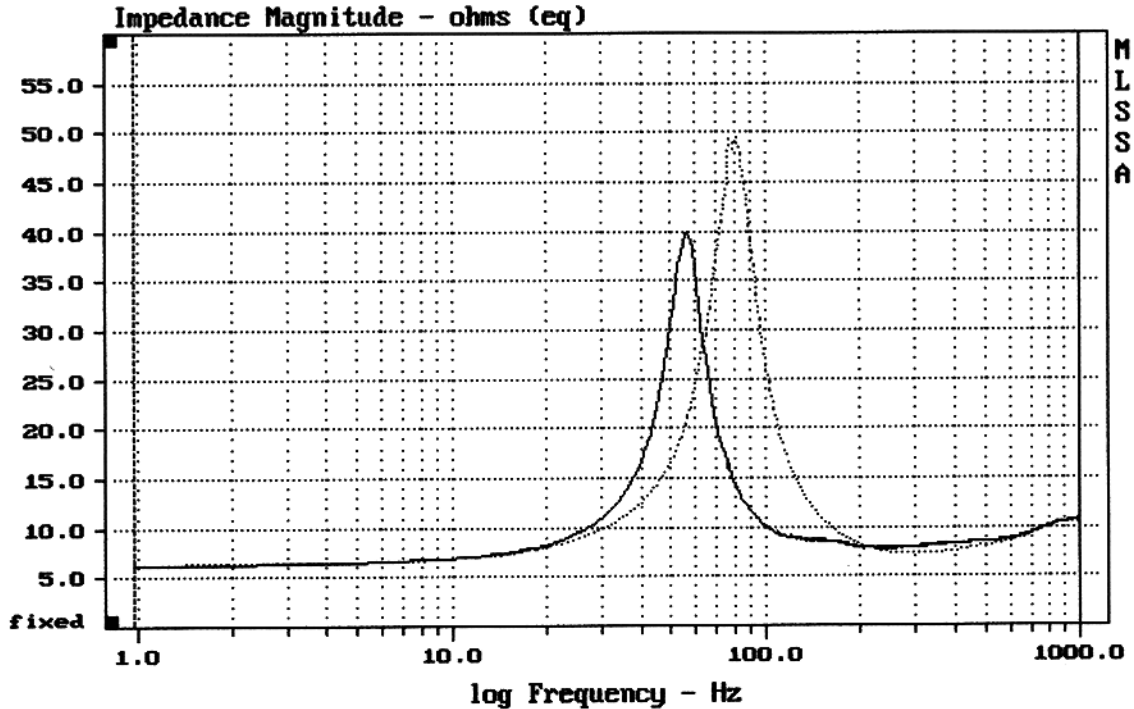

mean: 10.56, rms: 12.32, std: 6.348, max: 49.4, min: 6.311

MLSSA: Frequency Domain

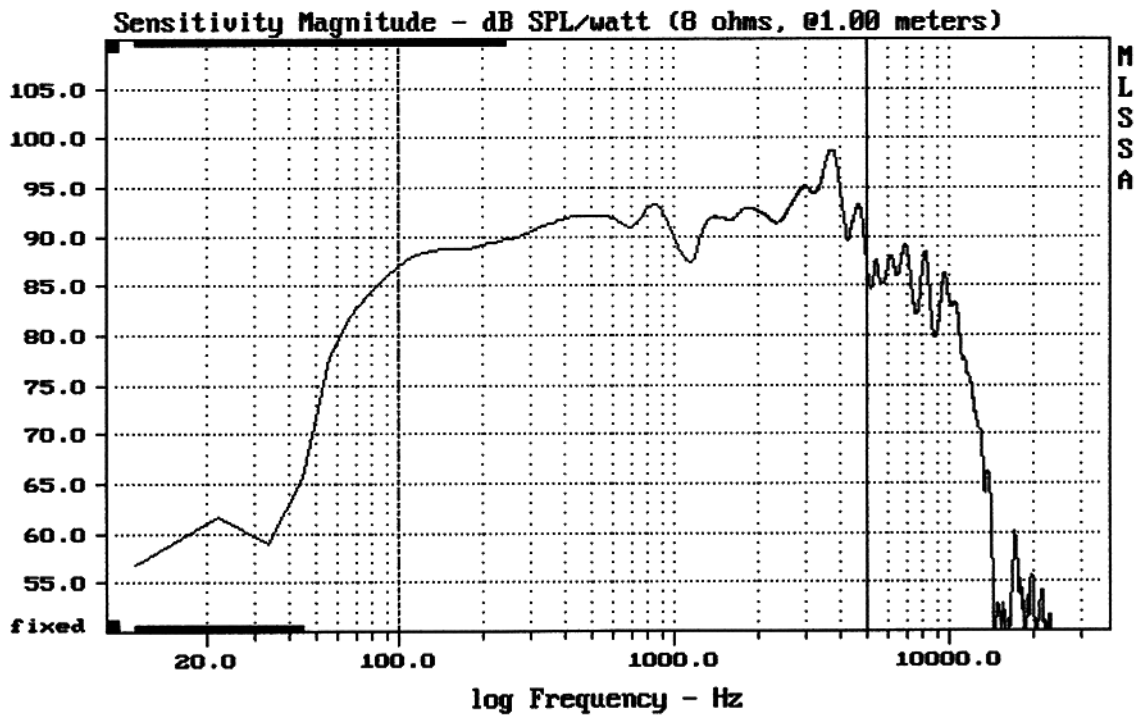

Level (100:5005 Hz) = 91.87 dB SPL/watt (8 ohms, @1.00 meters)

RCF L8S800

MLSSA: Frequency Domain

