

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	57.15	Hz
3	Re	6.16	Ohms[dc]
4	Res	90.72	Ohms
5	Qms	6.14	
6	Qes	0.42	
7	Qts	0.39	
8	L1	0.44	mH
9	L2	1.00	mH
10	R2	6.15	Ohms
11	RMSE-load	1.06	Ohms
12	Vas(Sd)	22.47	liters
13	Mms	23.46	grams
14	Cms	331	$\mu$ M/Newton
15	B1	11.15	Tesla-M
16	SPLref(Sd)	91.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (20.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.0% (-20% to -50% is recommended).

PD.8BM20


MLSSA: Parameters

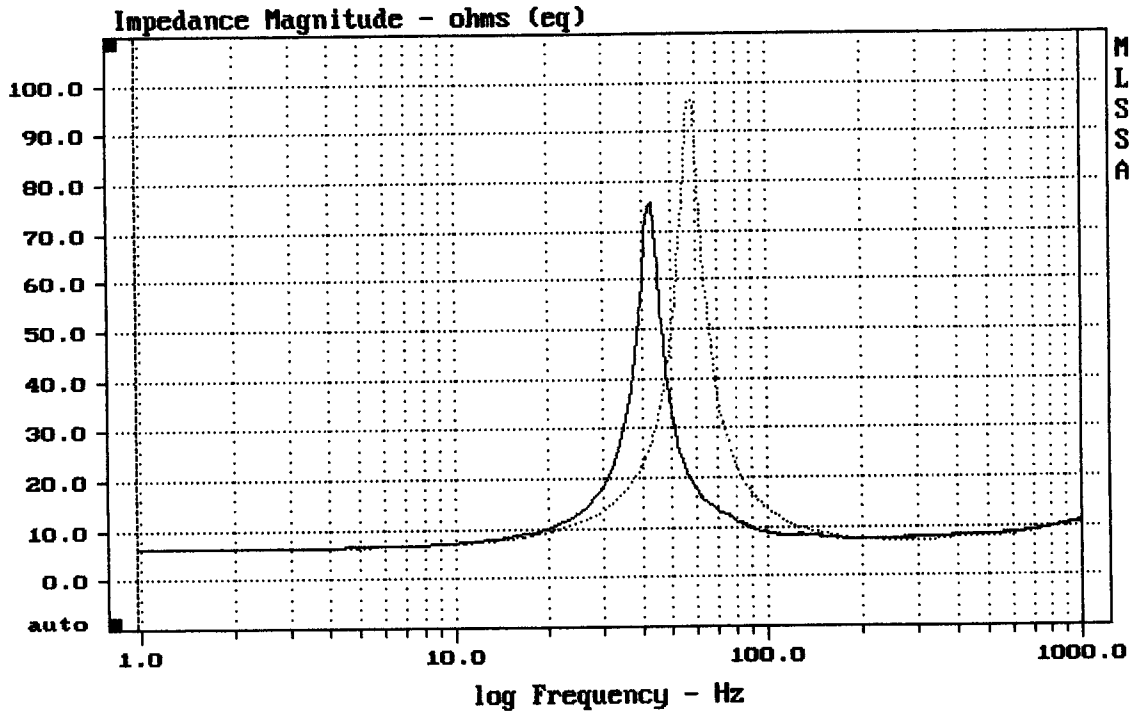

mean: 10.55, rms: 14.1, std: 9.355, max: 96.75, min: 6.239

DITO


MLSSA: Frequency Domain

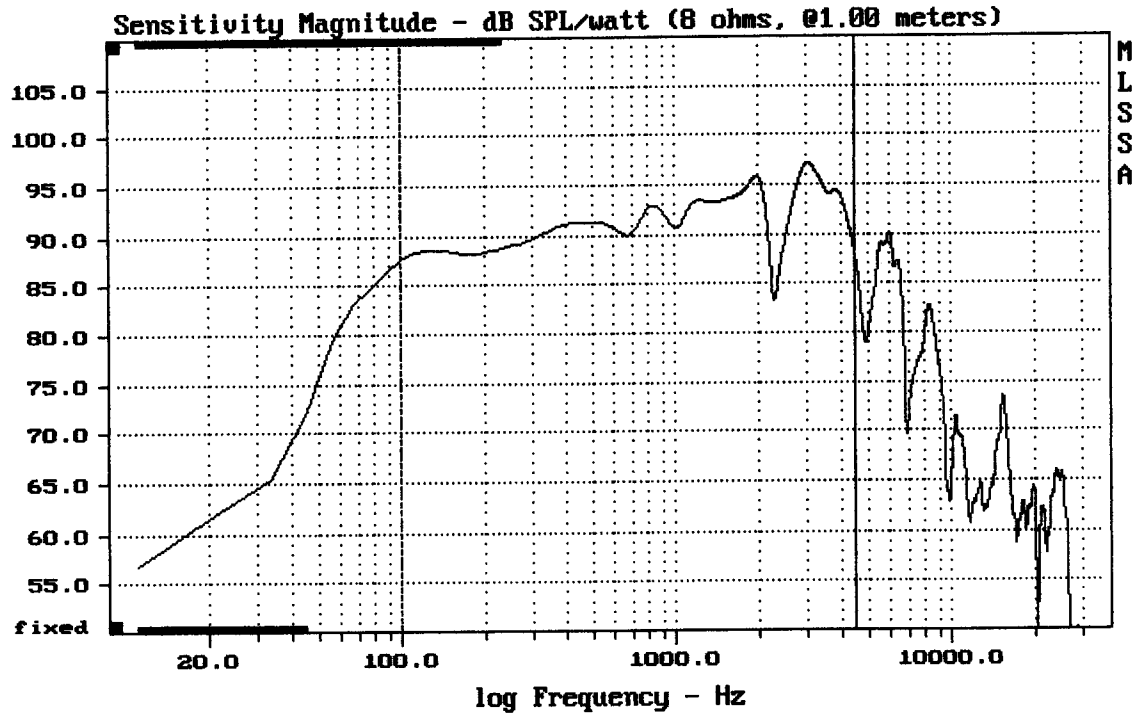

Level (100:4506 Hz) = 91.88 dB SPL/watt (8 ohms, @1.00 meters)

PDM.8BM20

MLSSA: Frequency Domain

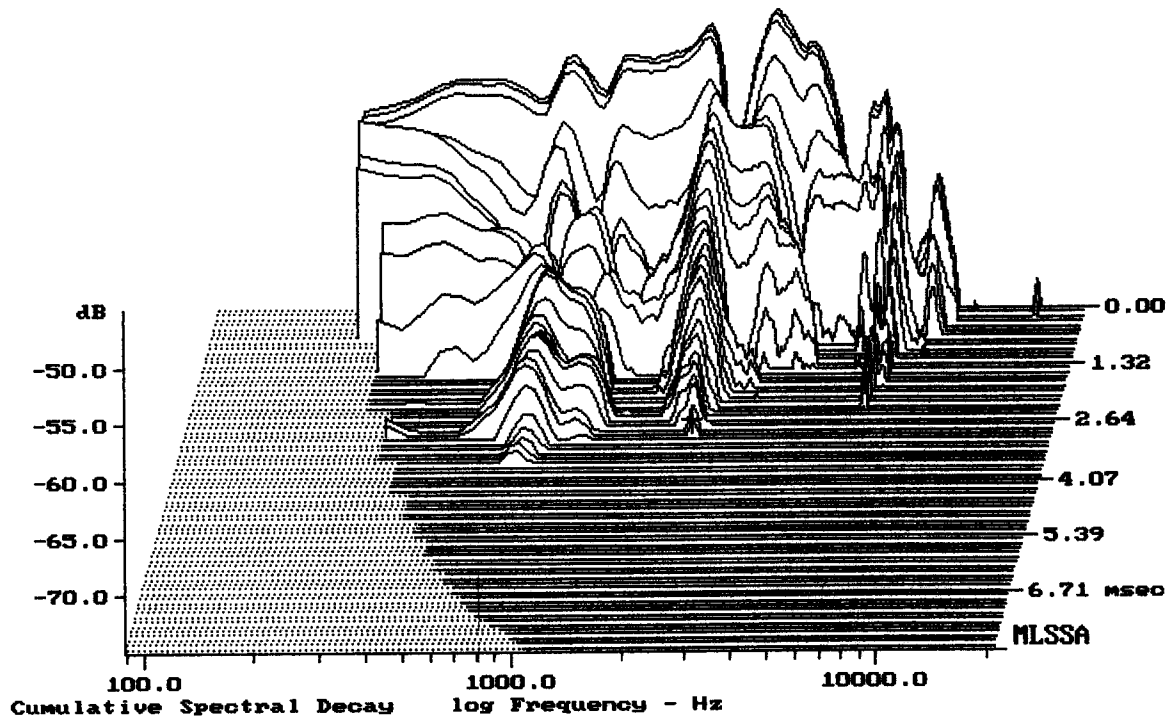

-73.60 dB, 2175 Hz (49), 2.970 msec (28)