

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	93.19	Hz
3	Re	5.21	Ohms[dc]
4	Res	38.66	Ohms
5	Qms	6.32	
6	Qes	0.85	
7	Qts	0.75	
8	L1	0.51	mH
9	L2	0.54	mH
10	R2	2.21	Ohms
11	RMSE-load	0.51	Ohms
12	Vas(Sd)	15.05	liters
13	Mms	14.40	grams
14	Cms	202	$\mu$ M/Newton
15	B1	7.18	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (20.00 grams)

Area (Sd): 230.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.2% (-20% to -50% is recommended).


FANE M1-8

MLSSA: Parameters

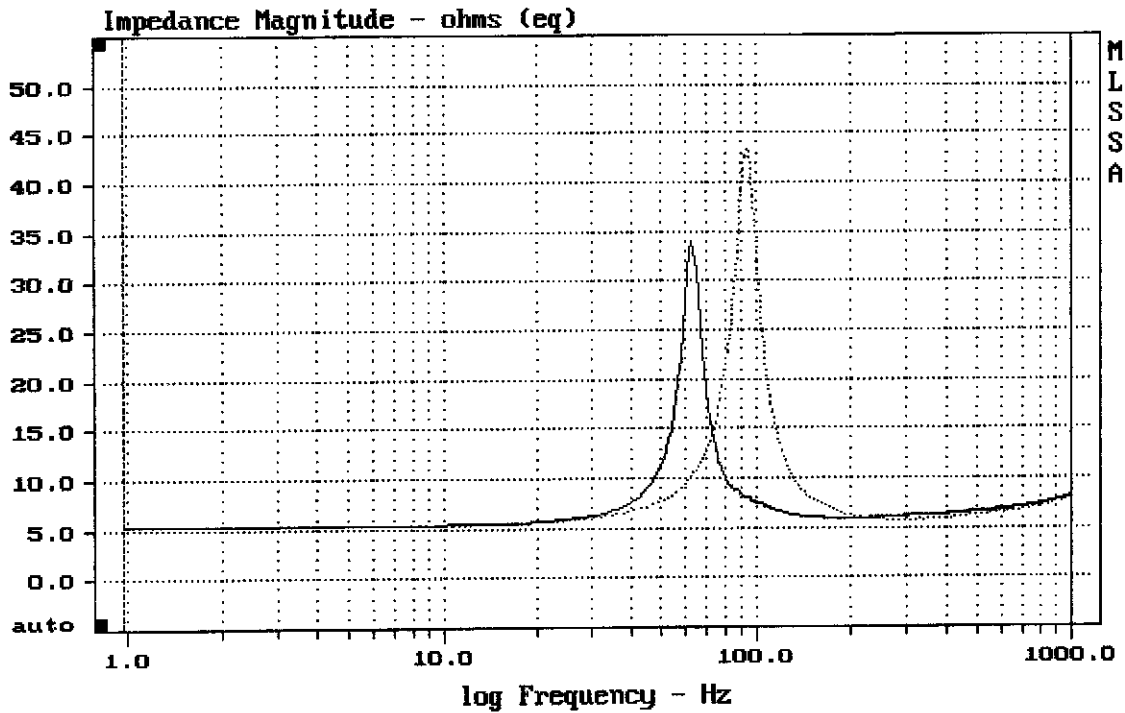

mean: 7.712, rms: 9.041, std: 4.718, max: 43.52, min: 5.25


MLSSA: Frequency Domain

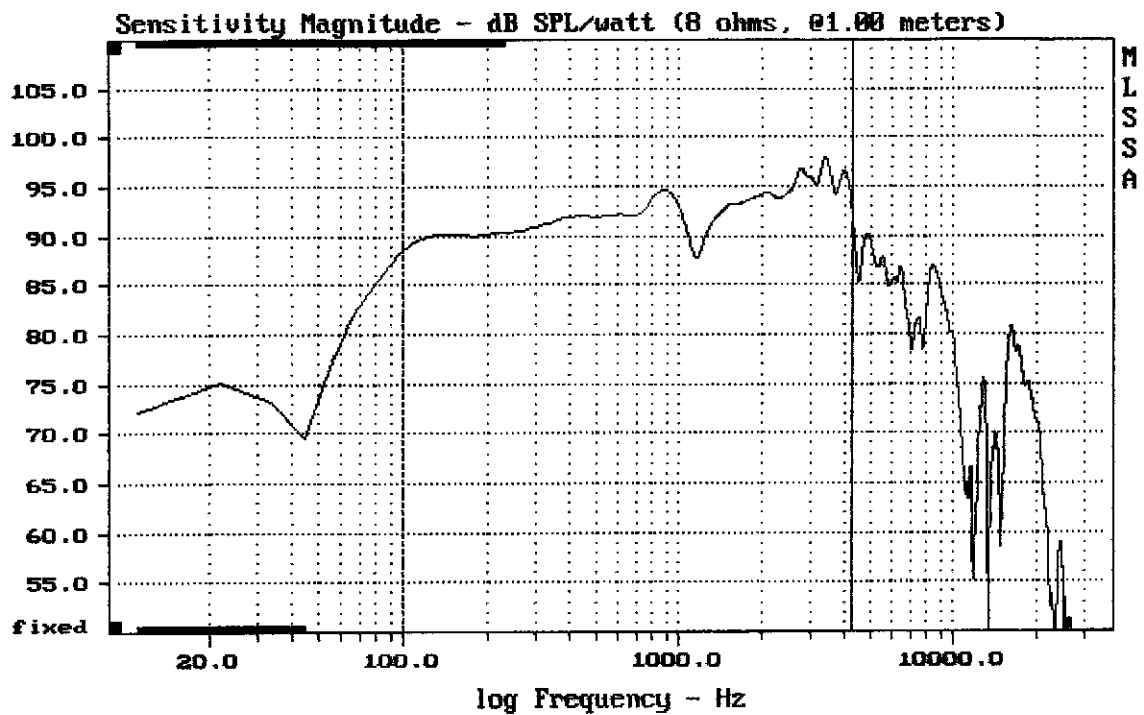

Level (100:4295 Hz) = 92.76 dB SPL/watt (8 ohms, @1.00 meters)

FANE M1-8

MLSSA: Frequency Domain

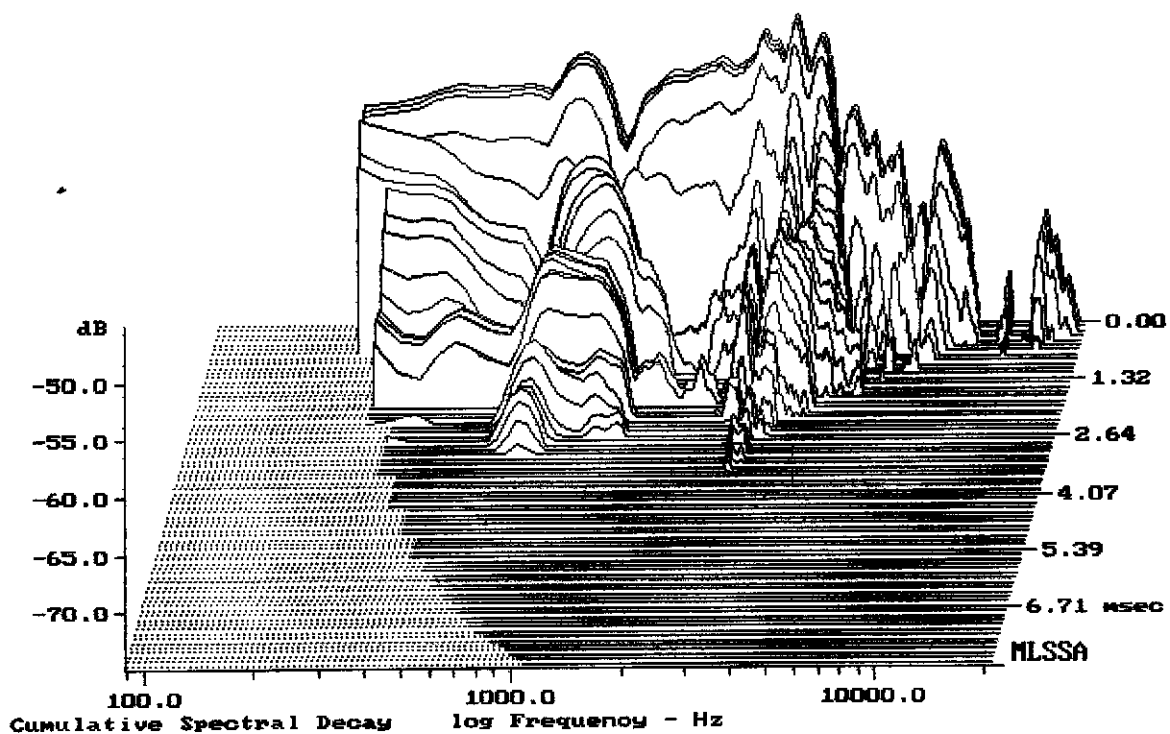

-73.77 dB, 2797 Hz (63), 3.198 msec (38)