

Measured Data

QC Limits

| Line | Parameter  | Value  | Units                       |
|------|------------|--------|-----------------------------|
| 1    | RMSE-free  | 1.23   | Ohms                        |
| 2    | Fs         | 174.48 | Hz                          |
| 3    | Re         | 5.25   | Ohms[dc]                    |
| 4    | Res        | 24.24  | Ohms                        |
| 5    | Qms        | 2.56   |                             |
| 6    | Qes        | 0.55   |                             |
| 7    | Qts        | 0.46   |                             |
| 8    | L1         | 0.25   | mH                          |
| 9    | L2         | 0.46   | mH                          |
| 10   | R2         | 1.24   | Ohms                        |
| 11   | RMSE-load  | 0.18   | Ohms                        |
| 12   | Vas(Sd)    | 2.50   | liters                      |
| 13   | Mms        | 8.25   | grams                       |
| 14   | Cms        | 101    | $\mu\text{M}/\text{Newton}$ |
| 15   | B1         | 9.26   | Tesla-M                     |
| 16   | SPLref(Sd) | 95.6   | dB[Re]                      |
| 17   | Rub-index  | 0.10   |                             |

Method: Mass-loaded (20.00 grams)

Area (Sd): 133.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -44.3% (-20% to -50% is recommended).


6MDN44

MLSSA: Parameters

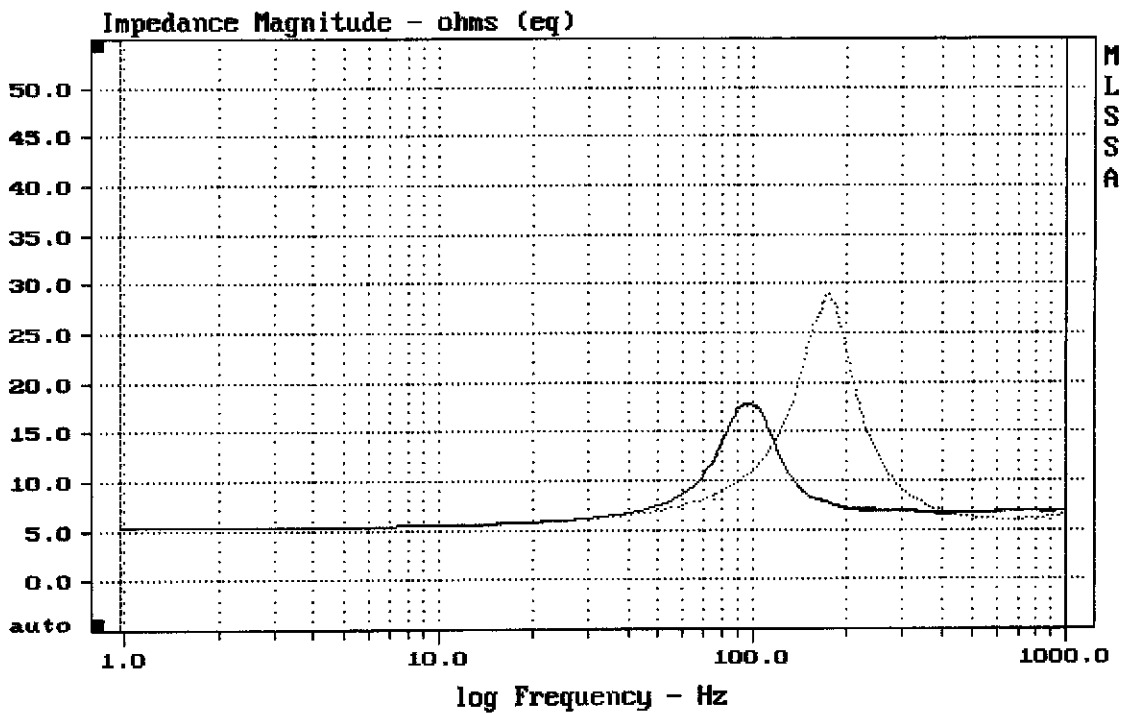

mean: 8.739, rms: 10.23, std: 5.316, max: 28.9, min: 5.332


MLSSA: Frequency Domain

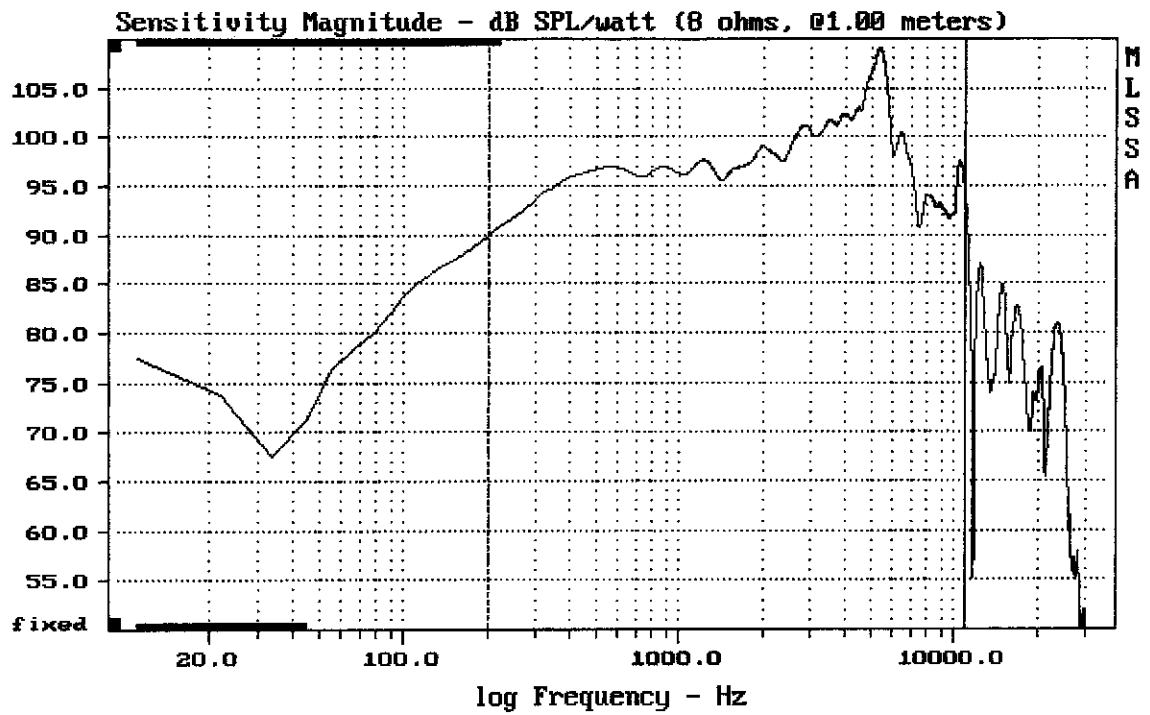

Level (200:11009 Hz) = 99.10 dB SPL/watt (8 ohms, @1.00 meters)

6MDN44

MLSSA: Frequency Domain

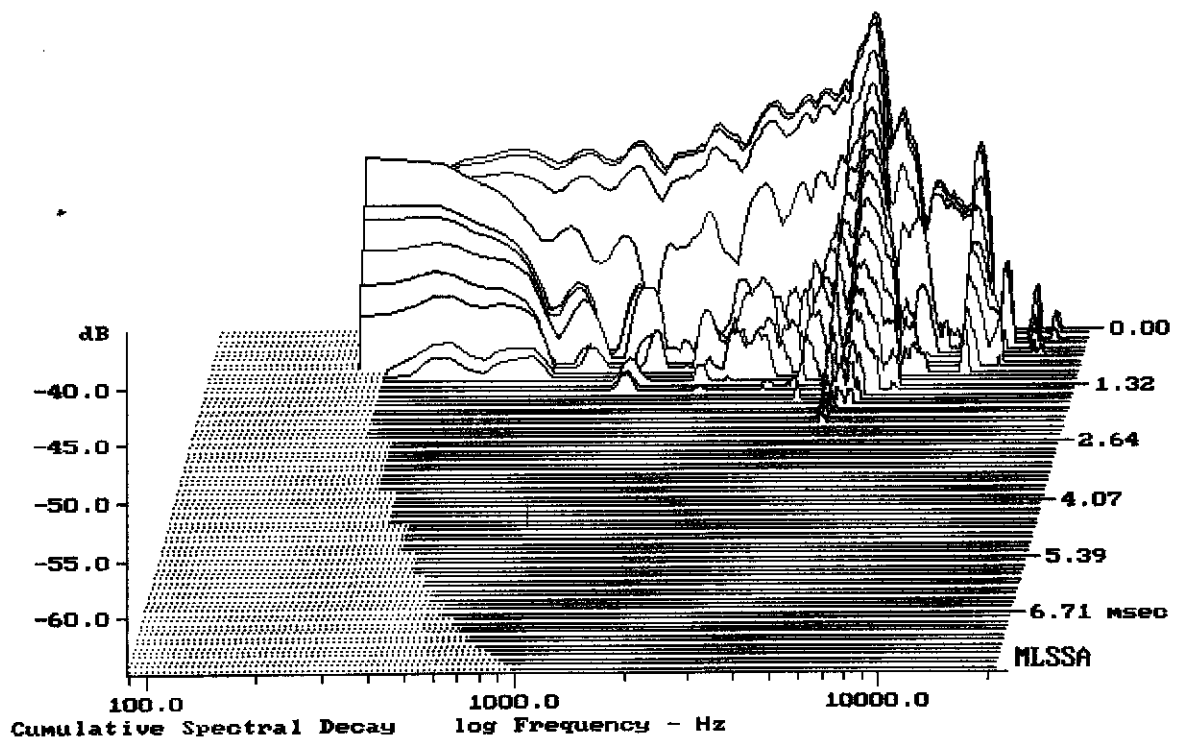

-63.36 dB, 4483 Hz (101), 2.090 msec (20)