

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.46	Ohms
2	Fs	74.32	Hz
3	Re	5.16	Ohms[dc]
4	Res	106.52	Ohms
5	Qms	9.52	
6	Qes	0.46	
7	Qts	0.44	
8	L1	0.41	mH
9	L2	0.42	mH
10	R2	1.97	Ohms
11	RMSE-load	0.92	Ohms
12	Vas(Sd)	7.86	liters
13	Mms	14.44	grams
14	Cms	318	$\mu\text{M}/\text{Newton}$
15	B1	8.68	Tesla-M
16	SPLref(Sd)	90.3	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (20.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.3% (-20% to -50% is recommended).


6NDL44

MLSSA: Parameters

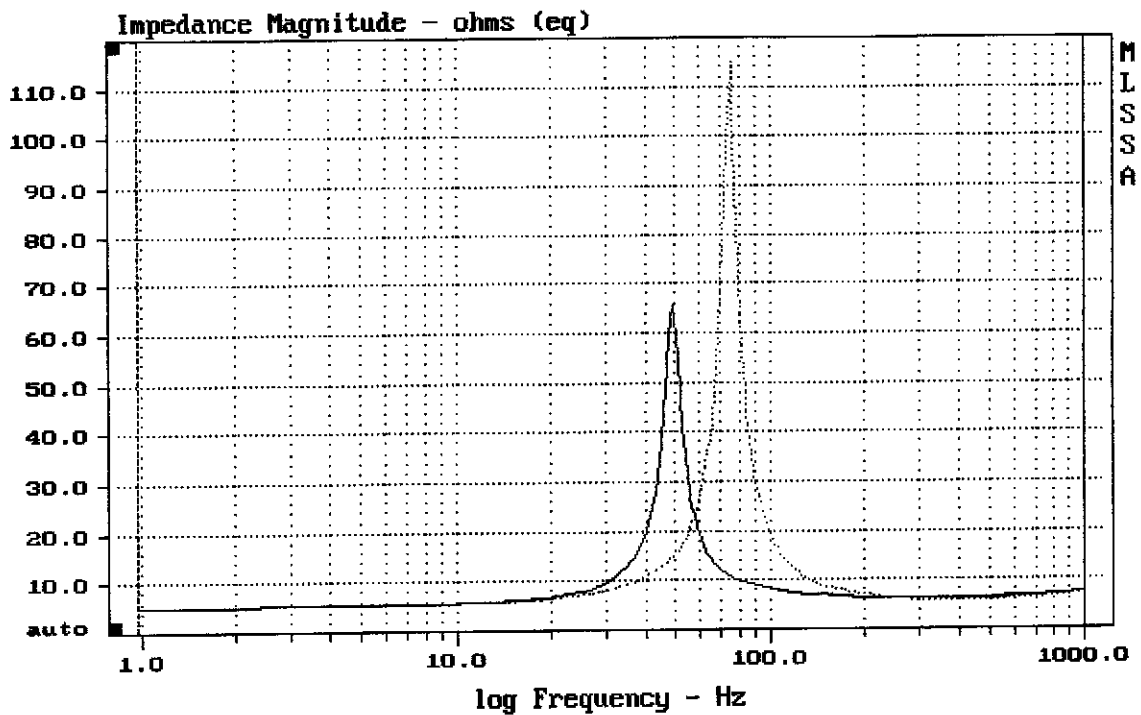

mean: 8.679, rms: 13.6, std: 10.47, max: 115, min: 5.236


MLSSA: Frequency Domain

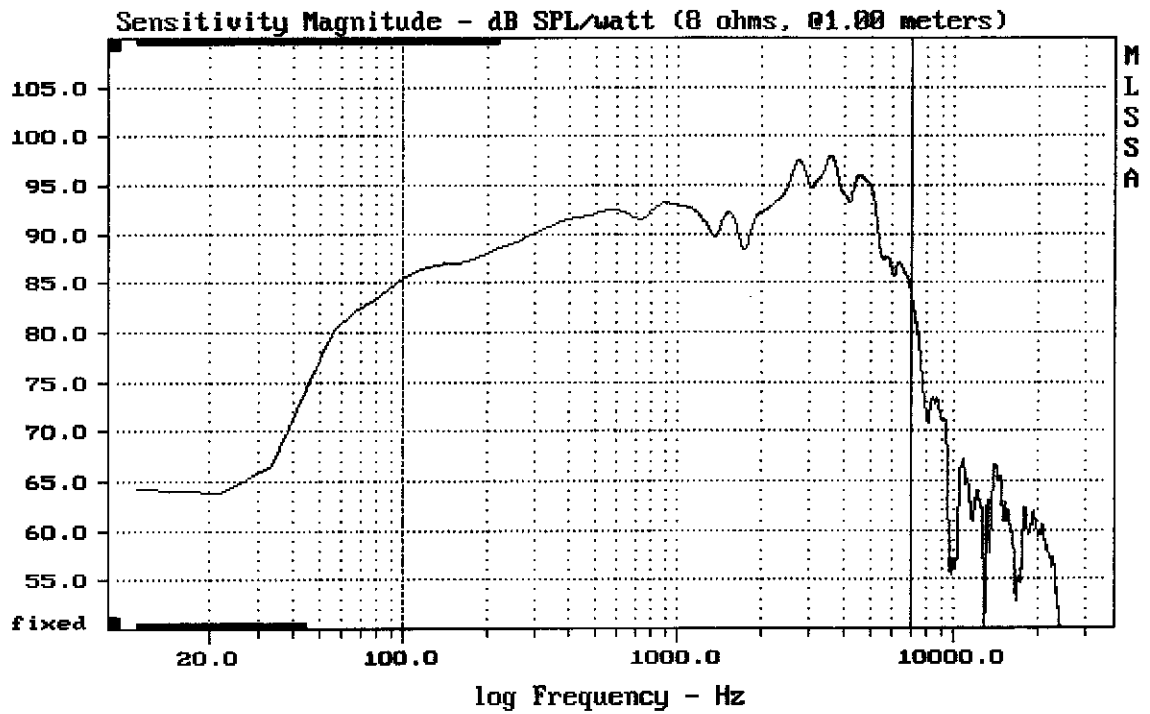

Level (100:7002 Hz) = 92.10 dB SPL/watt (8 ohms, @1.00 meters)

6NDL44

MLSSA: Frequency Domain

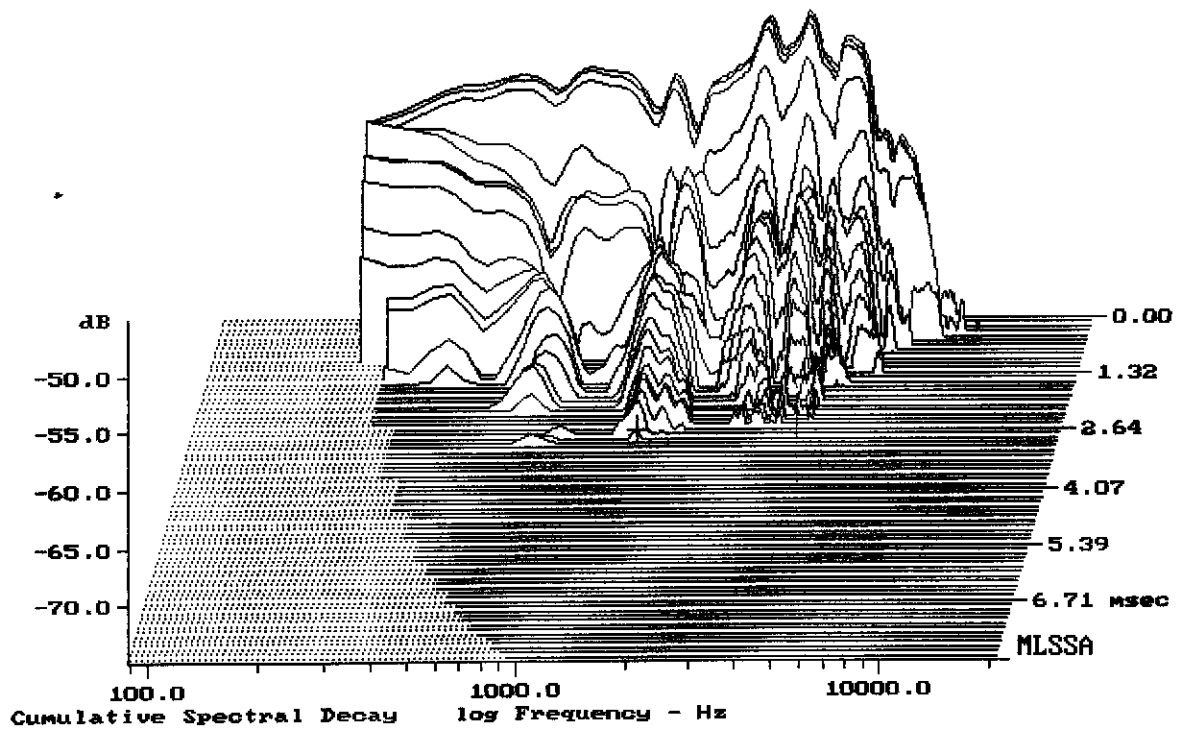

-74.16 dB, 1465 Hz (33), 2.860 msec (27)