

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.72	Ohms
2	Fs	52.90	Hz
3	Re	7.23	Ohms[dc]
4	Res	206.25	Ohms
5	Qms	9.08	
6	Qes	0.32	
7	Qts	0.31	
8	L1	0.36	mH
9	L2	0.81	mH
10	R2	3.68	Ohms
11	RMSE-load	0.60	Ohms
12	Vas(Sd)	16.54	liters
13	Mms	5.76	grams
14	Cms	1570	$\mu\text{M}/\text{Newton}$
15	B1	6.60	Tesla-M
16	SPLref(Sd)	90.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (10.00 grams)

Area (Sd): 86.59 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.2% (-20% to -50% is recommended).


FANE STUDIO 5FR

MLSSA: Parameters

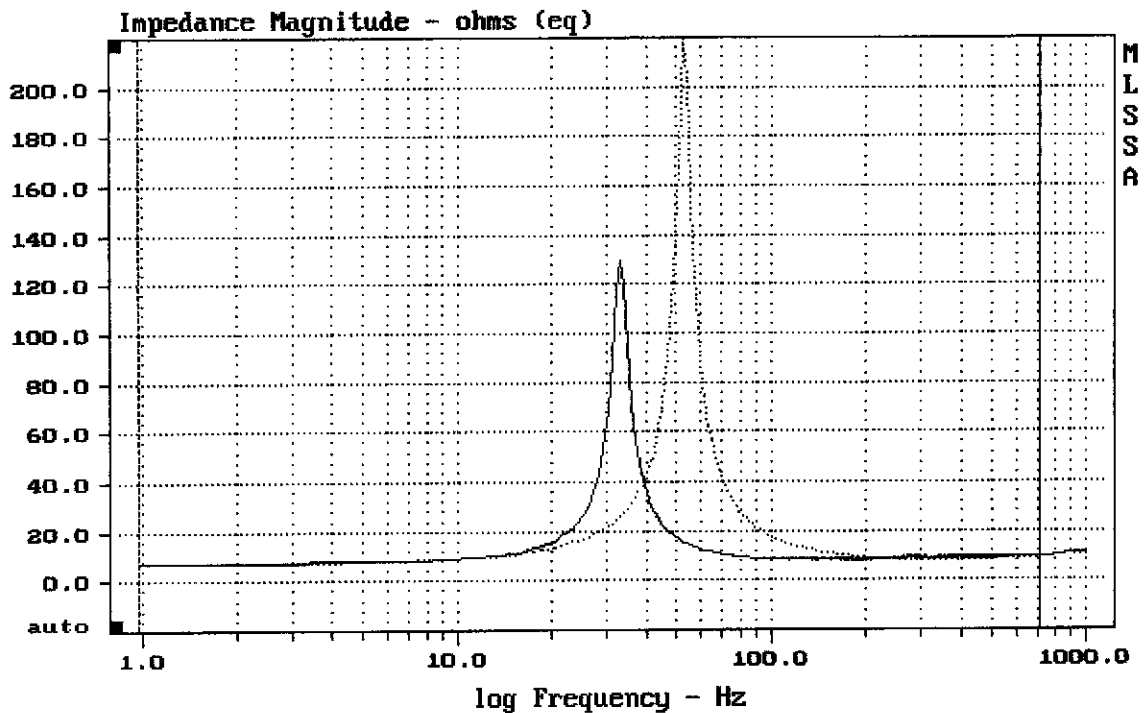

mean: 13.79, rms: 25.08, std: 20.95, max: 220.3, min: 7.329


MLSSA: Frequency Domain

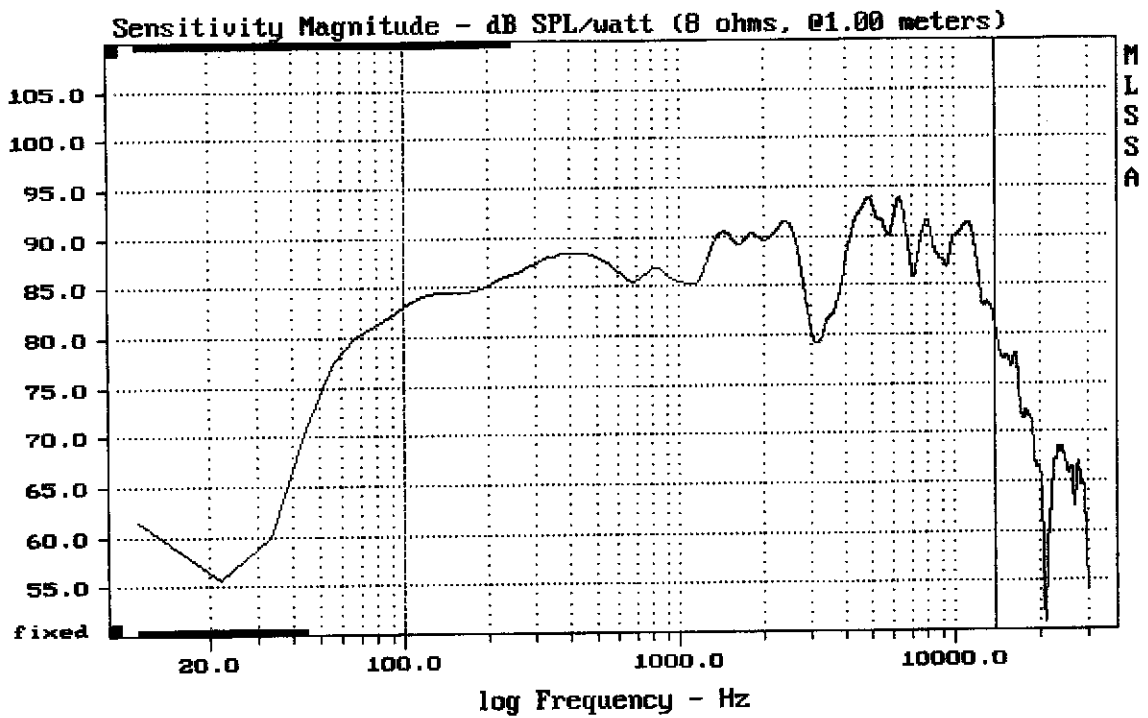

Level (100:14005 Hz) = 88.27 dB SPL/watt (8 ohms, @1.00 meters)

FANE STUDIO 5FR

MLSSA: Frequency Domain

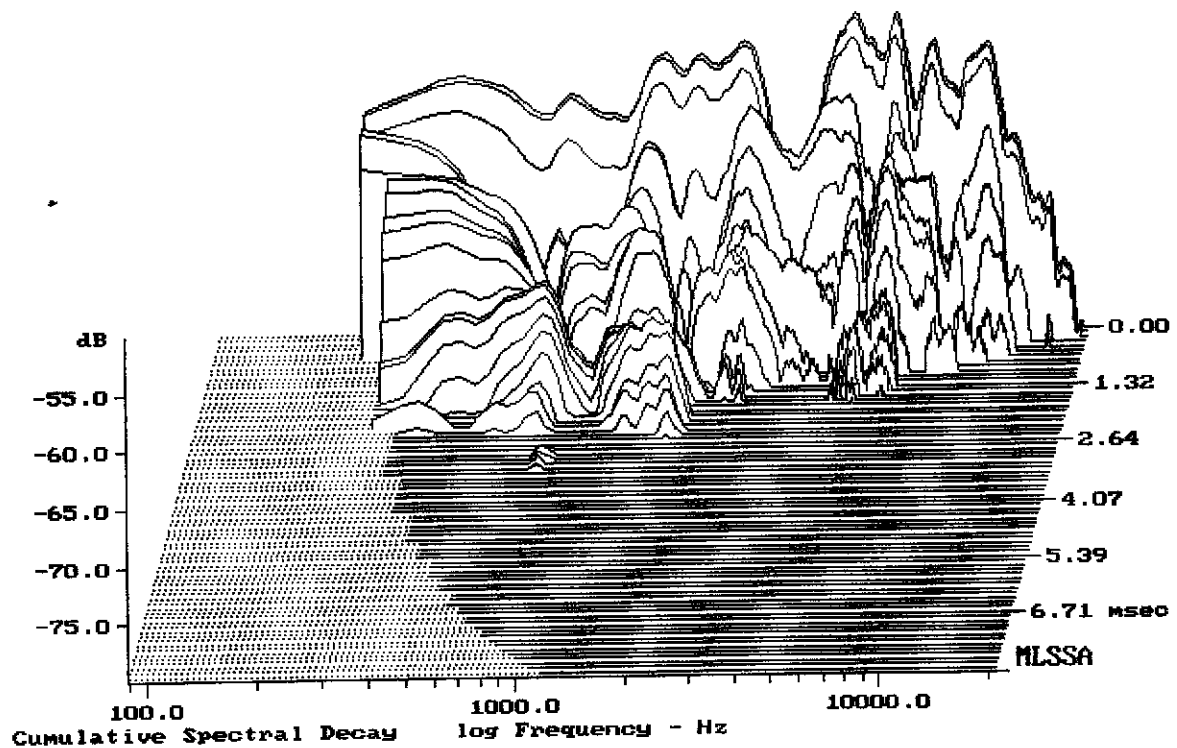

-78.60 dB, 5105 Hz (115), 1.650 msec (16)