


Level (78:21507 Hz) = 90.66 dB SPL/watt (4 ohms, @1.00 meters)

6.5" TANNOY/TC.HELICON 1608 FROM USM-300

MLSSA: Frequency Domain

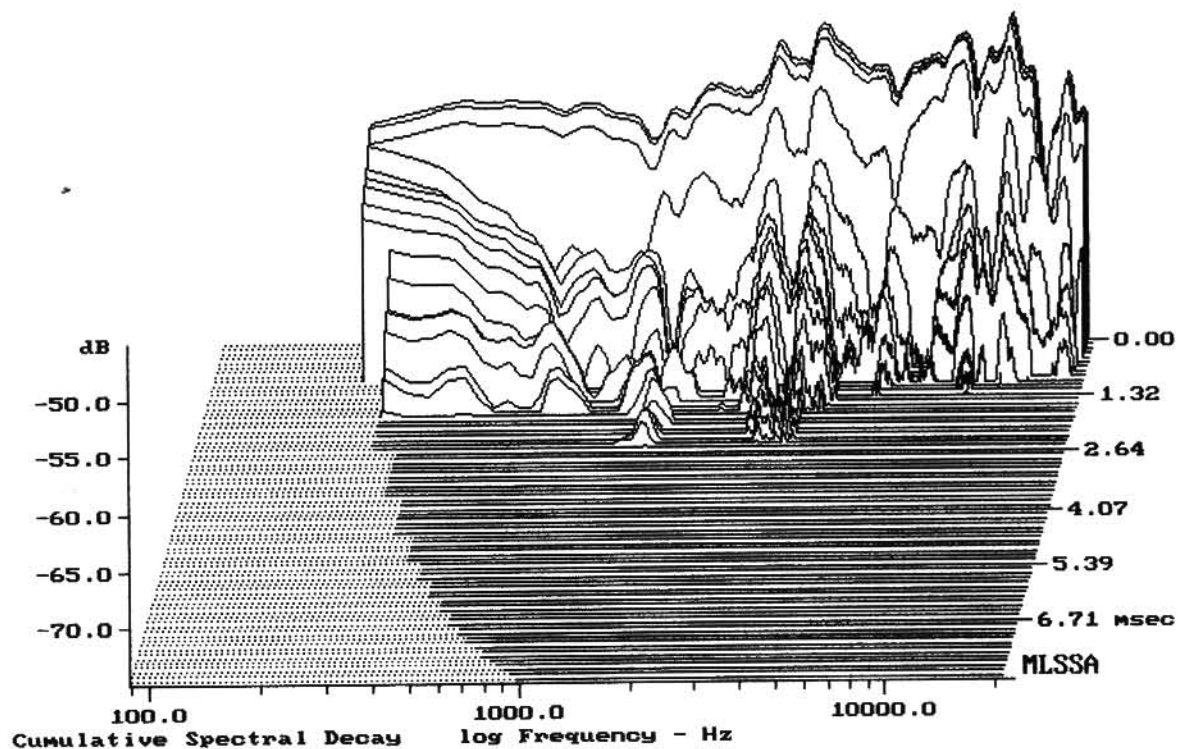

-73.21 dB, 2930 Hz (66), 2.310 msec (22)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.12	Ohms
2	Fs	74.68	Hz
3	Re	2.86	Ohms[dc]
4	Res	13.03	Ohms
5	Qms	3.32	
6	Qes	0.73	
7	Qts	0.60	
8	L1	0.15	mH
9	L2	0.38	mH
10	R2	2.01	Ohms
11	RMSE-load	0.17	Ohms
12	Vas(Sd)	11.80	liters
13	Mms	9.53	grams
14	Cms	477	$\mu\text{M}/\text{Newton}$
15	B1	4.19	Tesla-M
16	SPLref(Sd)	90.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (15.00 grams)

Area (Sd): 132.73 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.6% (-20% to -50% is recommended).

6.5" TANNOY/TC.HELICON 1608 FROM VSM-300

MLSSA: Parameters

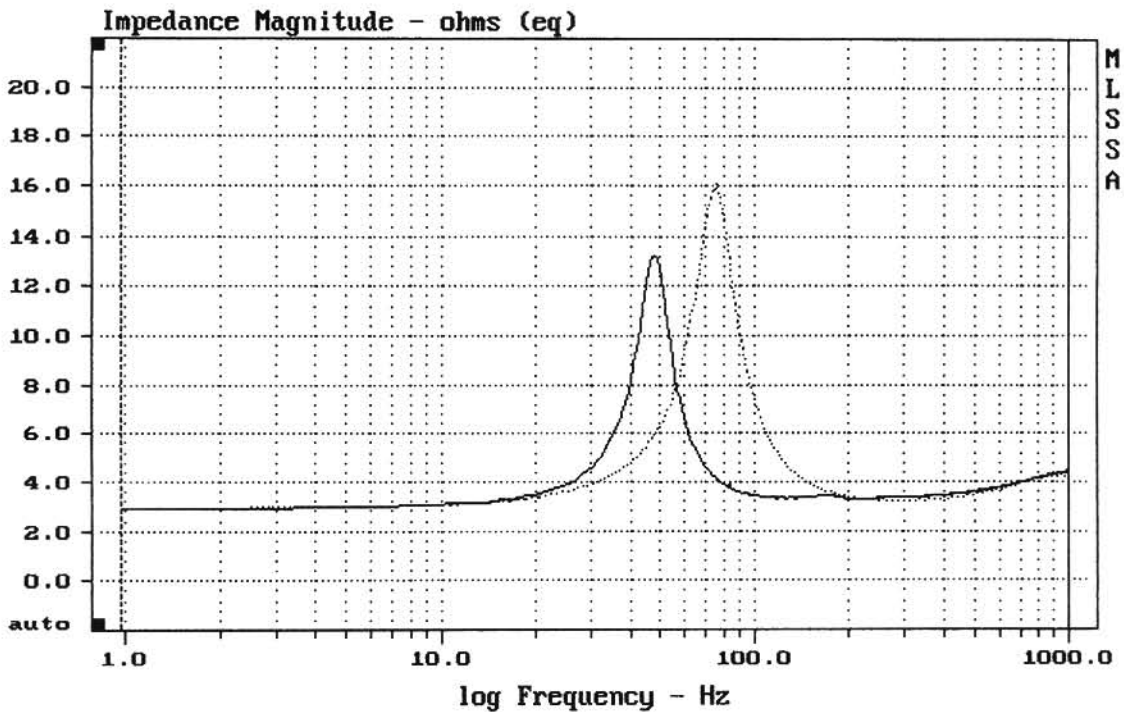

mean: 4.174, rms: 4.555, std: 1.825, max: 16.07, min: 2.918

DTTO

MLSSA: Frequency Domain