


Level (100:5005 Hz) = 95.45 dB SPL/watt (8 ohms, @1.00 meters)

8NDL64

MLSSA: Frequency Domain

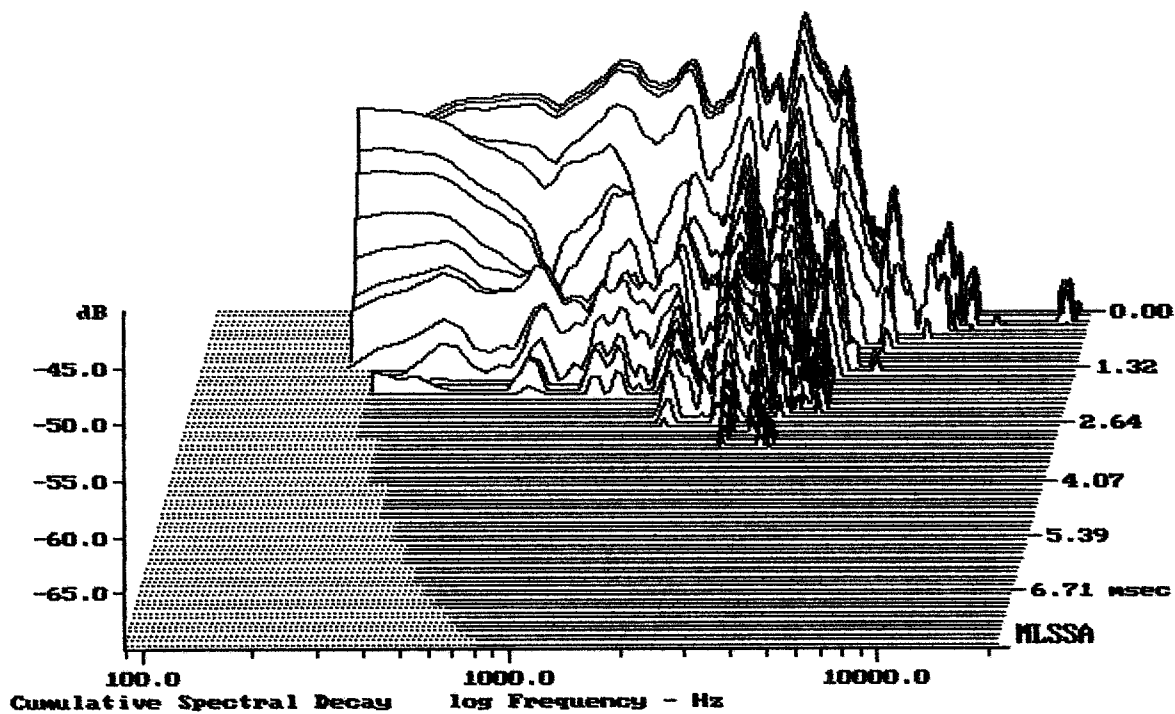

-69.18 dB, 2619 Hz (59), 3.190 msec (30)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.25	Ohms
2	Fs	81.22	Hz
3	Re	5.37	Ohms[dc]
4	Res	329.12	Ohms
5	Qms	13.92	
6	Qes	0.23	
7	Qts	0.22	
8	L1	0.14	mH
9	L2	1.39	mH
10	R2	5.55	Ohms
11	RMSE-load	0.47	Ohms
12	Vas(Sd)	10.02	liters
13	Mms	24.62	grams
14	Cms	156	$\mu\text{M}/\text{Newton}$
15	B1	17.24	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.0% (-20% to -50% is recommended).

8NDL64

MLSSA: Parameters

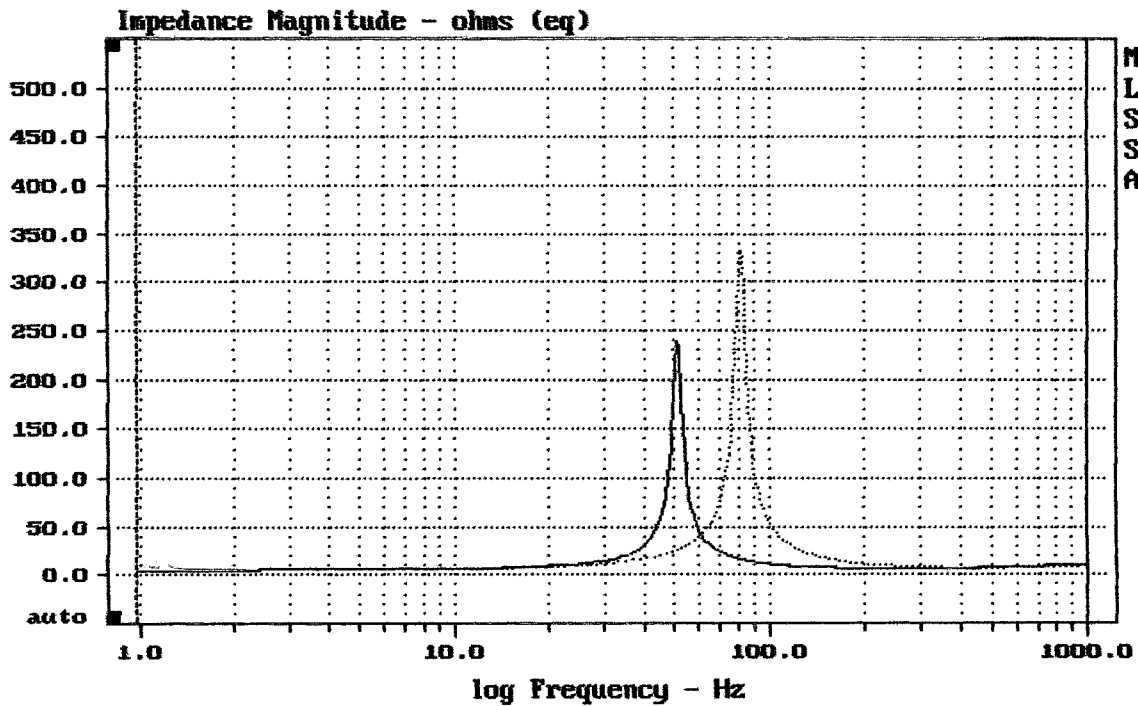

mean: 14.75, rms: 32.46, std: 28.91, max: 332.8, min: 5.49

MLSSA: Frequency Domain