


Level (100:6583 Hz) = 96.81 dB SPL/watt (16 ohms, @1.00 meters)

8NW51-16

MLSSA: Frequency Domain

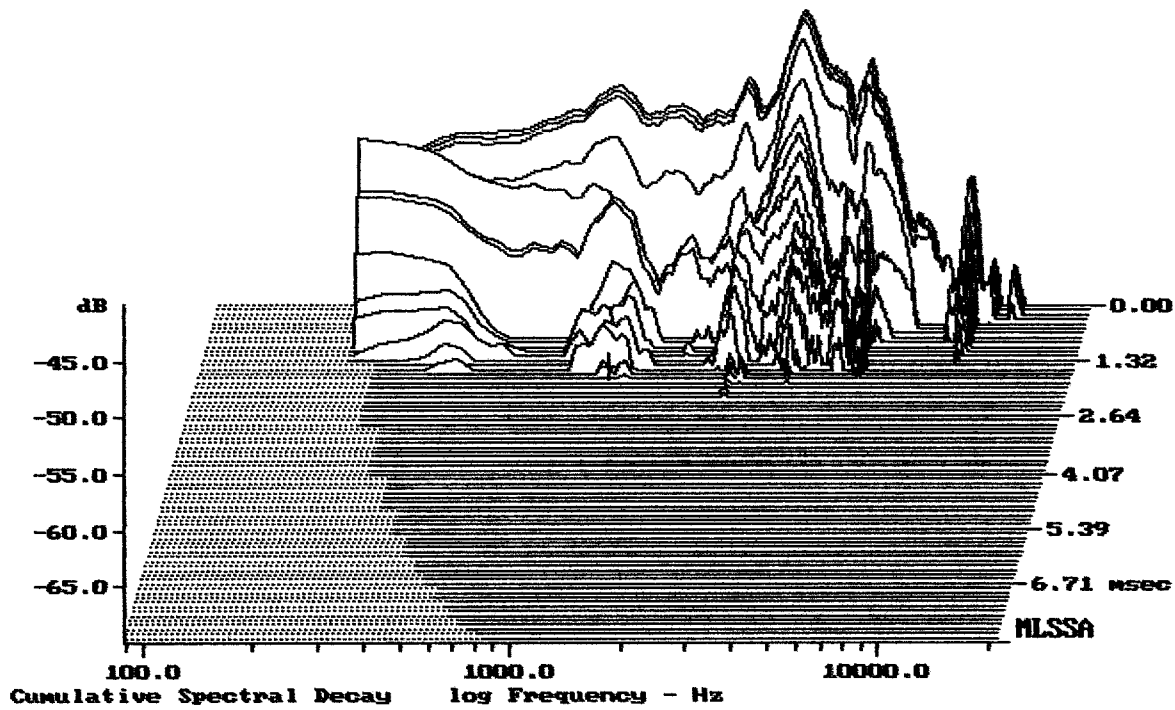

-69.35 dB, 1154 Hz (26), 1.650 msec (16)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.46	Ohms
2	Fs	81.42	Hz
3	Re	10.32	Ohms[dc]
4	Res	360.91	Ohms
5	Qms	9.56	
6	Qes	0.27	
7	Qts	0.27	
8	L1	0.28	mH
9	L2	2.83	mH
10	R2	7.58	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	9.94	liters
13	Mms	24.68	grams
14	Cms	155	$\mu\text{M}/\text{Newton}$
15	B1	21.83	Tesla-M
16	SPLref(Sd)	94.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.8% (-20% to -50% is recommended).

8NW51-16

MLSSA: Parameters

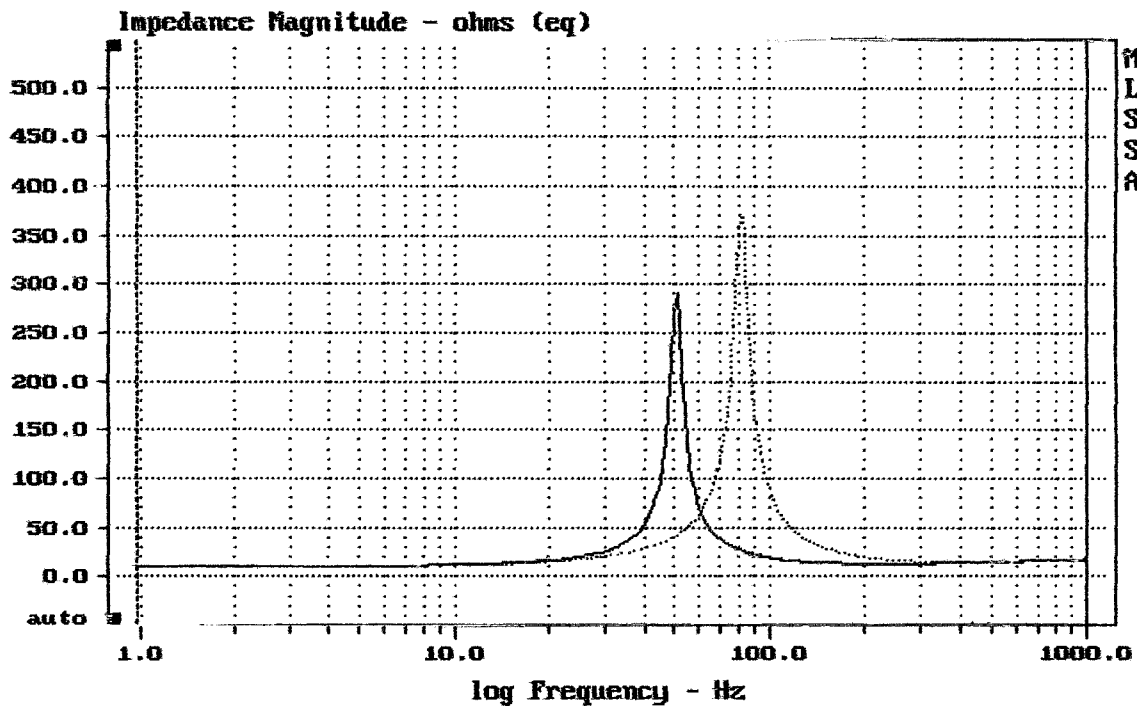

mean: 24.56, rms: 44.42, std: 37.01, max: 369.2, min: 10.51

MLSSA: Frequency Domain