


Level (100:8001 Hz) = 87.79 dB SPL/watt (8 ohms, @1.00 meters)

FANE STUDIO 5 FRK

MLSSA: Frequency Domain

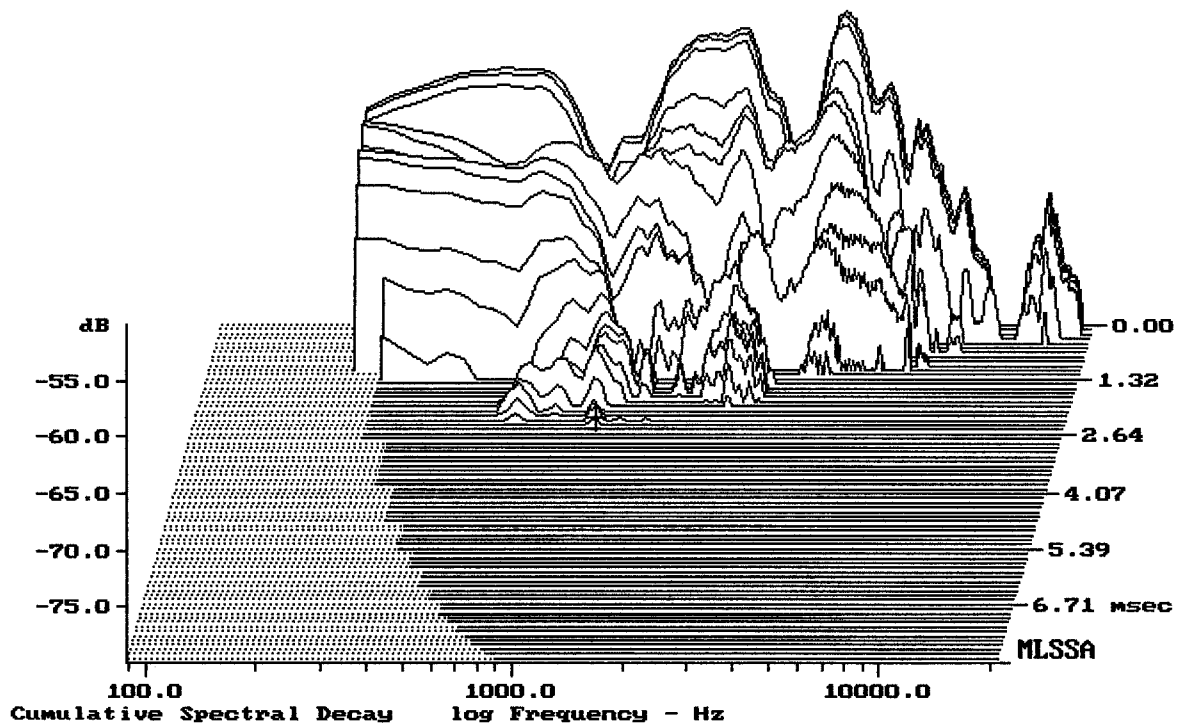

-79.28 dB, 1110 Hz (25), 2.420 msec (23)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	72.13	Hz
3	Re	7.84	Ohms[dc]
4	Res	185.65	Ohms
5	Qms	10.42	
6	Qes	0.44	
7	Qts	0.42	
8	L1	-0.24	mH
9	L2	1.38	mH
10	R2	12.43	Ohms
11	RMSE-load	0.75	Ohms
12	Vas(Sd)	7.88	liters
13	Mms	6.51	grams
14	Cms	748	$\mu\text{M}/\text{Newton}$
15	B1	7.25	Tesla-M
16	SPLref(Sd)	90.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (10.00 grams)

Area (Sd): 86.59 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.8% (-20% to -50% is recommended).

FANE STUDIO 5FRK

MLSSA: Parameters

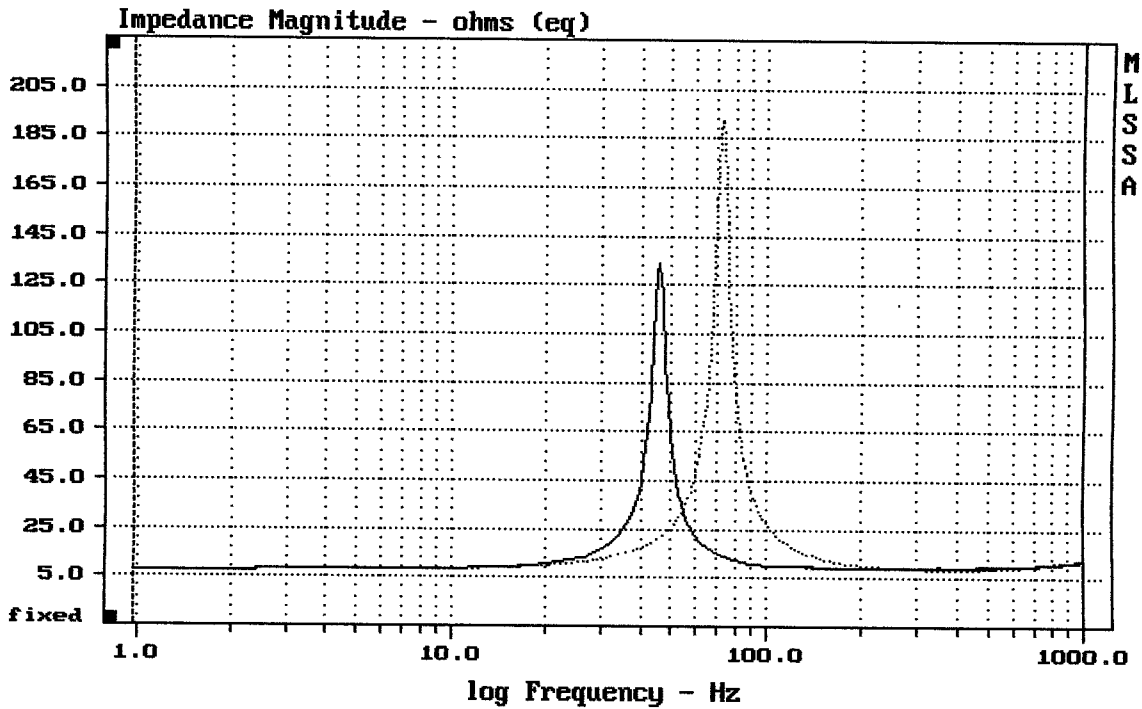

mean: 13.6, rms: 22.02, std: 17.33, max: 192.3, min: 7.893

MLSSA: Frequency Domain