


Level (200:9000 Hz) = 97.85 dB SPL/watt (16 ohms, @1.00 meters)

6MDN44-16

MLSSA: Frequency Domain

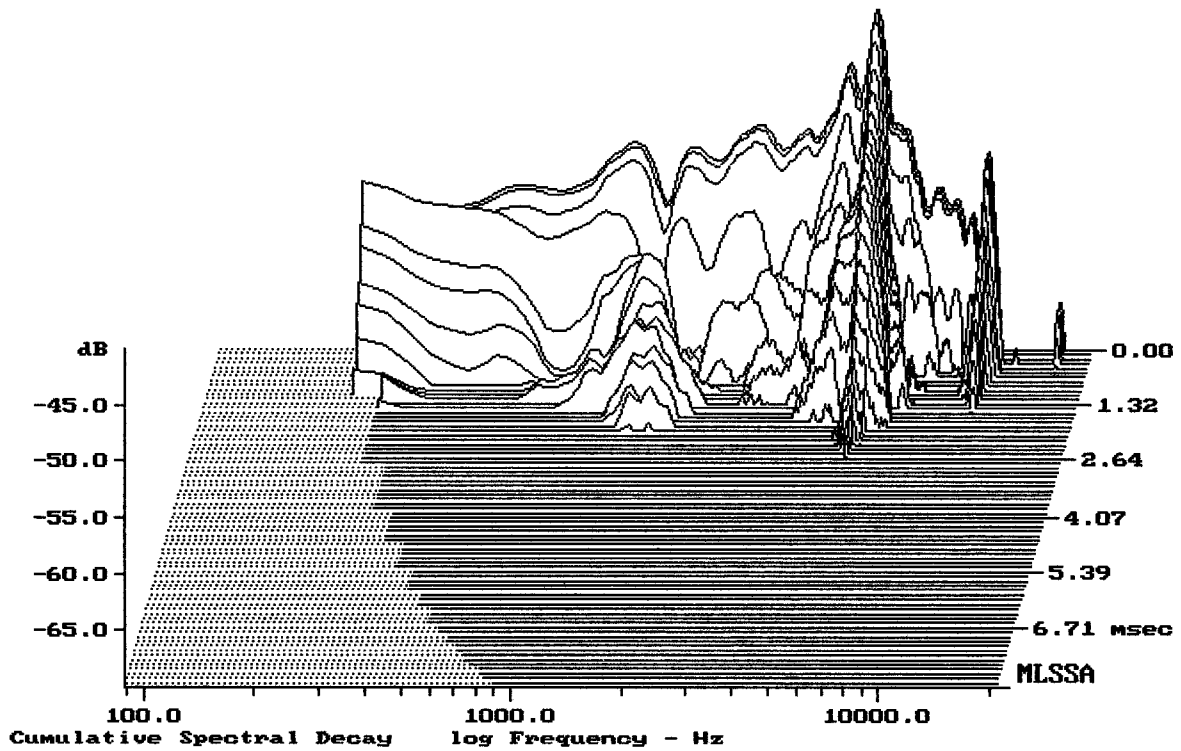

-69.06 dB, 5371 Hz (121), 2.530 msec (24)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.55	Ohms
2	Fs	165.91	Hz
3	Re	11.71	Ohms[dc]
4	Res	75.41	Ohms
5	Qms	5.81	
6	Qes	0.90	
7	Qts	0.78	
8	L1	0.25	mH
9	L2	0.64	mH
10	R2	4.02	Ohms
11	RMSE-load	0.73	Ohms
12	Vas(Sd)	2.69	liters
13	Mms	9.85	grams
14	Cms	93	$\mu$ M/Newton
15	B1	11.54	Tesla-M
16	SPLref(Sd)	93.2	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (10.00 grams)

Area (Sd): 143.14 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.9% (-20% to -50% is recommended).

6MDN44-16

MLSSA: Parameters

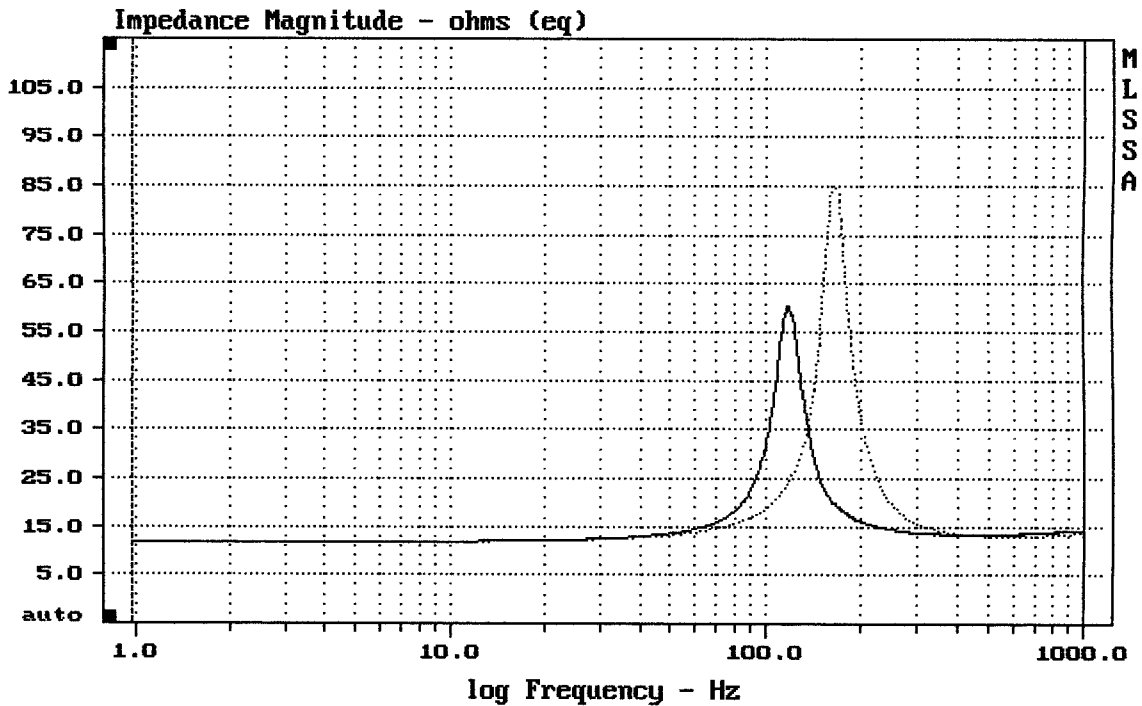

mean: 17.7, rms: 21.72, std: 12.58, max: 85.38, min: 11.79

MLSSA: Frequency Domain