


Level (100:7502 Hz) = 89.80 dB SPL/watt (8 ohms, @1.00 meters)

5FG44

MLSSA: Frequency Domain

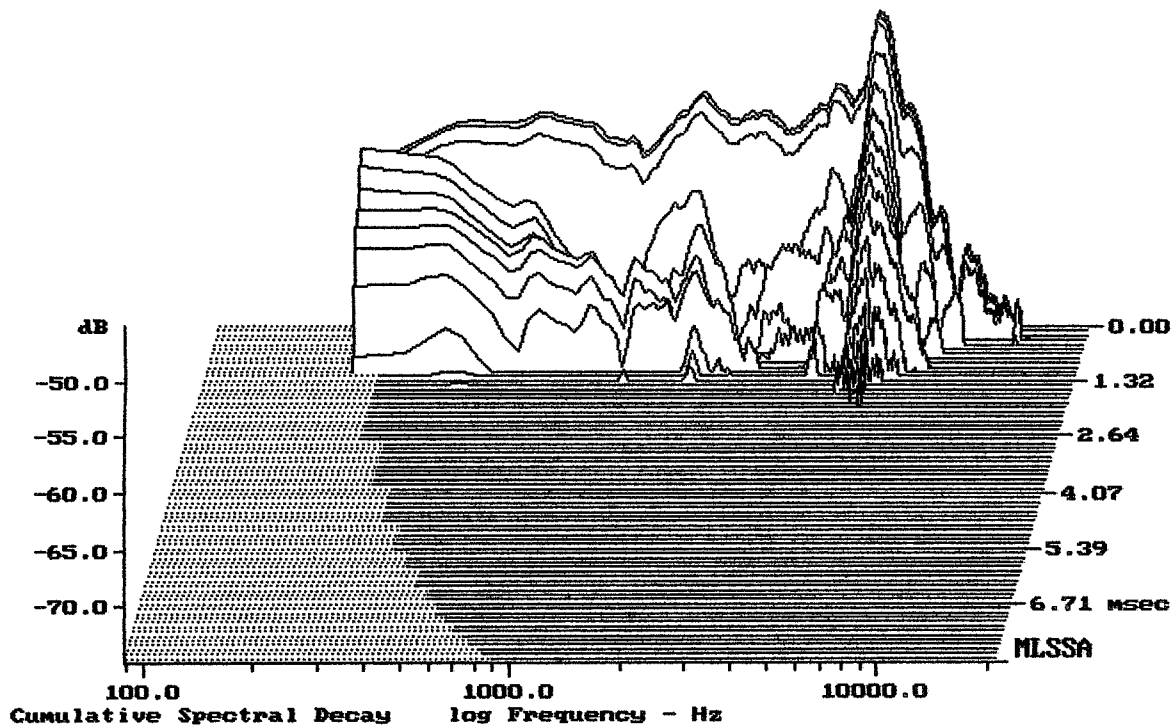

-75.00 dB, 5238 Hz (118), 1.540 msec (15)

DT10

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	69.12	Hz
3	Re	5.58	Ohms[dc]
4	Res	188.38	Ohms
5	Qms	10.70	
6	Qes	0.32	
7	Qts	0.31	
8	L1	0.47	mH
9	L2	0.50	mH
10	R2	2.36	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	5.32	liters
13	Mms	11.33	grams
14	Cms	468	$\mu\text{M}/\text{Newton}$
15	B1	9.31	Tesla-M
16	SPLref(Sd)	89.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (10.00 grams)

Area (Sd): 90.00 sq cm


DCR mode: Measure (-0.17 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.6% (-20% to -50% is recommended).

5FG44

MLSSA: Parameters

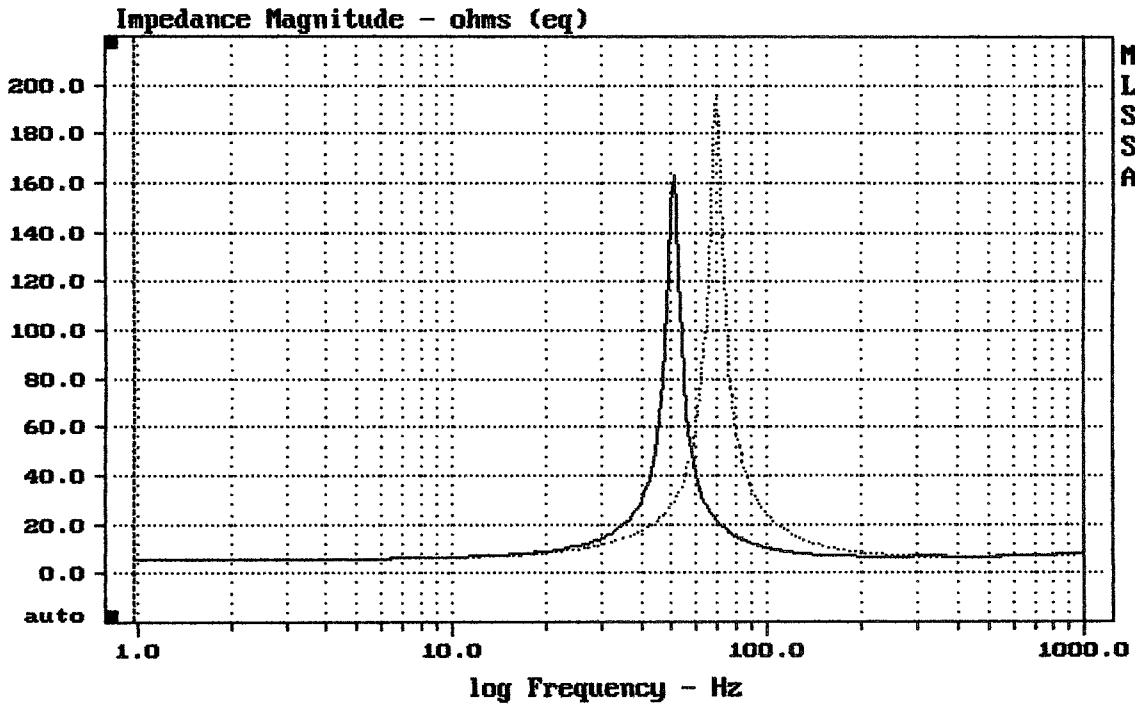

mean: 10.98, rms: 20.47, std: 17.27, max: 194.3, min: 5.739

MLSSA: Frequency Domain