


## Lightweight Ramps – up and down



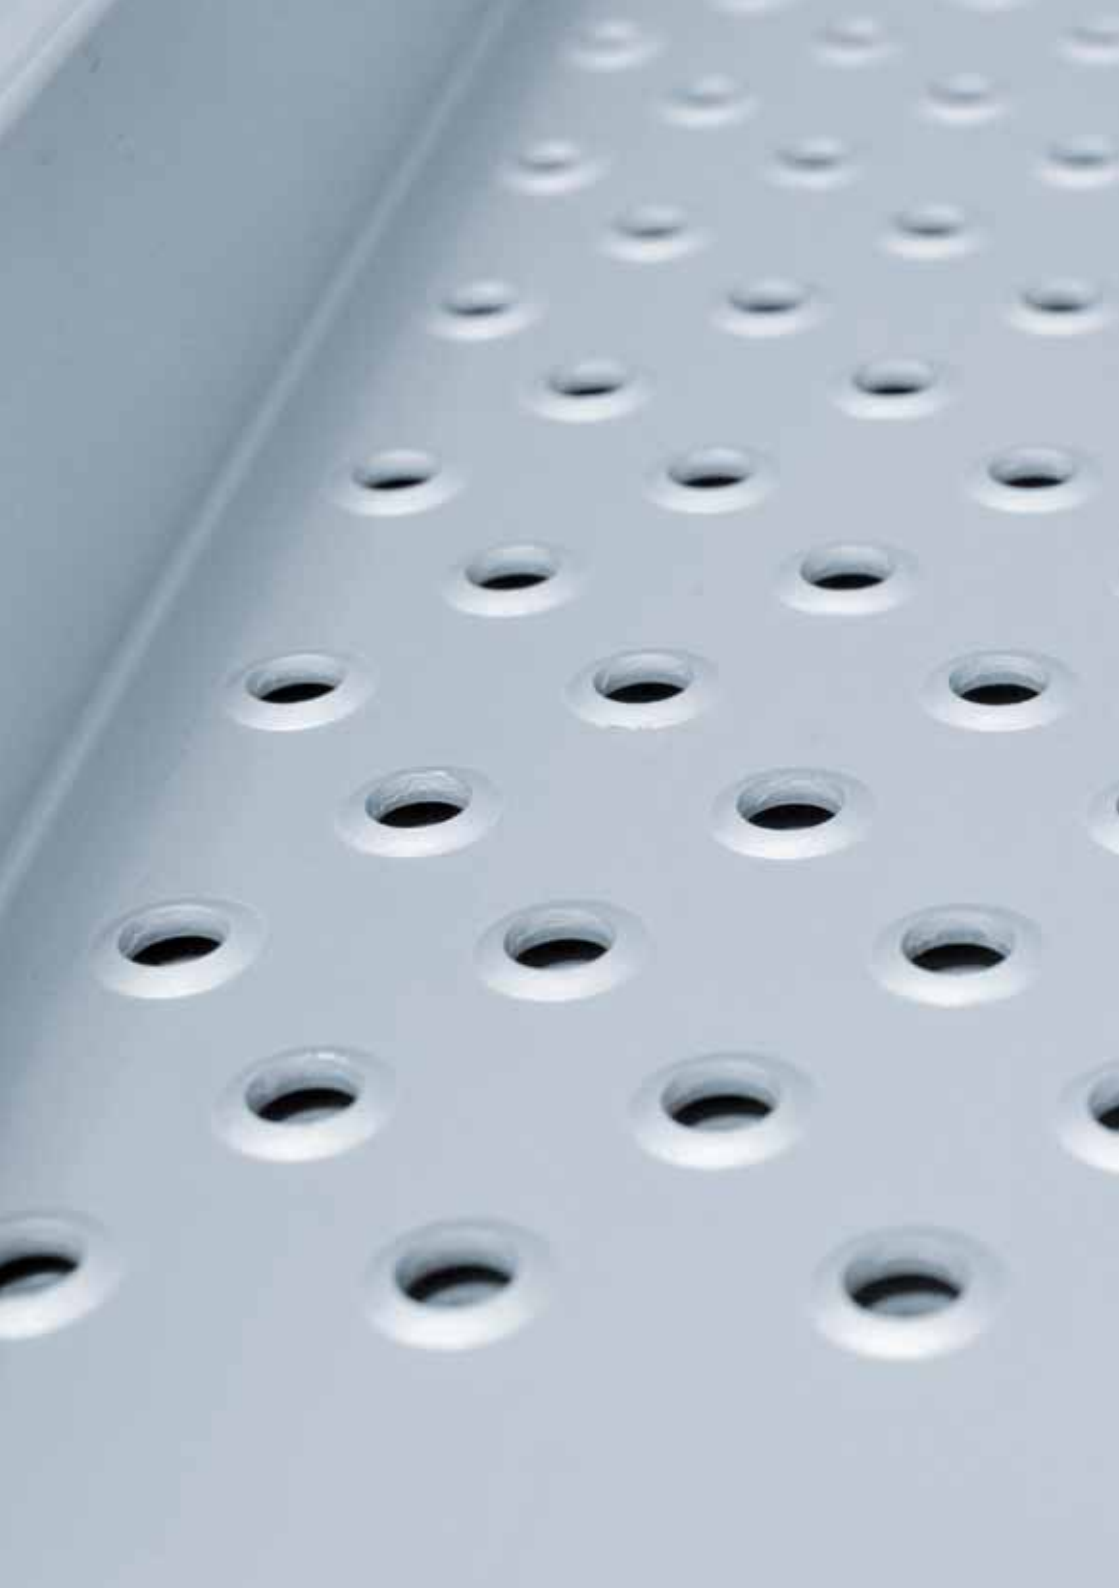

## » Lightweight Ramps – up and down

Life is full of ups and downs. Good to know that there is something to help you carry your load and make your daily business easier – no matter what the challenge is.

With Access Easy ramps from Milos, you are well prepared for any kind of loading or transporting task. From our small ramps for light-weight tasks (such as wheelchair access or light freight) to our heavy-duty ramps (for heavy loads up to 8,500 kilograms), we offer a wide a range of ramps for every purpose and need. Even very unusual needs are no problem – just ask for our customized solutions.

All ramps are equipped with an anti-slip surface for indoor and outdoor use. Special folding and telescopic mechanisms ensure easy transport and low storage volumes.

### Ramp Solutions

 healthcare ramps <b>OV10,11, 12, 13</b>   <b>04</b>	 healthcare ramps <b>RA10, 20</b>   <b>06</b>	 light ramps <b>OV20</b>   <b>08</b>
 small ramps <b>OV50</b>   <b>09</b>	 small ramps <b>OV100</b>   <b>10</b>	 small ramps <b>OV 110</b>   <b>11</b>
 small ramps <b>BR300</b>   <b>12</b>	 medium ramps <b>OV400</b>   <b>13</b>	 modular ramps <b>RAM</b>   <b>14</b>

## OV10 telescopic ramps (healthcare)

OV10 ramps are telescopic and extendable to a length of 2.9 metres. They only weigh between 3,4 and 9 kilograms but carry up to 500 kilograms of weight. OV10 ramps offer the perfect solution for logistics companies, wheelchairs, mobility scooters and more. Equipped with carrier handle.



OV10-2-2040 mm  
weight 6,4kg  
max.loading 320 kg/pair



OV10-1-1180 mm  
weight 3,4 kg  
max. loading 500kg/pair



OV10-3-2900 mm  
weight 9kg  
max.loading 260 kg/pair

- Max. length up to 2900 mm (telescopic 3 section ramp)
- Min. length from 1180 mm
- Max. load up to 500 kg, 3 basic types
- Low weight
- Suitable for using with wheel chair

## OV11, OV12, OV13 telescopic and foldable ramps (healthcare)

OV11, OV12, OV13 ramps are telescopic, foldable and extendable to a length of 3,2 metres. They only weigh between 1,6 and 11,2 kilograms but carry up to 500 kilograms of weight.



OV11-1-550 mm  
weight 1,6 kg  
max. loading 500 kg/pair



OV11-3-2530 mm  
weight 8,7 kg  
max. loading 260 kg/pair  
telescopic



OV12-2300 mm  
weight 7,8 kg  
max. loading 260 kg/pair  
foldable



OV13-3240 mm  
weight 11 kg  
max. loading 260 kg/pair  
foldable and telescopic

OV13-1440 mm  
weight 5,6 kg  
max. loading 260 kg/pair  
foldable and telescopic

- Max.length up to 3240 mm (telescopic and foldable 3 section ramp)
- Min. length from 550 mm
- Max. load up to 500 kg
- Low weight
- Suitable for using with electric wheel chair
- Foldable and telescopic system

## RA10 foldable ramps (healthcare)

RA10 ramps are the perfect solution for logistics companies, construction industries and for wheelchair access. They carry a load of up to 400 kilograms, are up to 2.7 metres long with a net weight of maximum 38 kilograms.

In the vehicle, the ramps are mounted to a bar but can be easily mounted and dismantled thanks to carrier handles. The folding mechanism ensures low transport volume while the gas piston provides smooth operation.



- Safe solutions for your easy access
- Gas piston for easy handling and operation
- Max. load up to 400 kg
- Maximum length up to 2750 mm, 2 or 3 part versions
- Solution with revolving part as option

RA10 2030mm  
weight 28 kg  
max. loading 400 kg

RA20 2750mm  
weight 37 kg  
max. loading 400 kg



## OV20 light ramps

OV20 ramps have a weight of only 7.3 kilograms but carry this almost a hundred times as a pair: 700 kilograms. They are made of aluminium and measure 2.3 x 0.3 x 0.8 metres.



OV20-300x2300 mm

- OV20 solutions for quads (folding system)
- Max. load up to 700 kg
- Length 2300 mm
- Width 300 mm
- Anti-slip profile

## OV50 light ramps

OV50 ramps are an ideal solution for loading of heavy equipment up to 1950 kilograms. They are specially designed for items such as flight cases and can be utilized by businesses that specialize in removing and transporting goods and equipment.



OV50-200x4000 mm



OV50-400x4000 mm



OV50-1000x5000 mm

- max. length 5000 mm
- Width 200 – 1000 mm
- Max. load up to 1950 kg
- Raised side rails keep cargo on ramp
- Designed for sound and light rental companies
- Low weight



OV50-800x5000 mm

## OV100 small ramps

OV100 small ramps are rigid aluminium lightweight ramps that have a high load capacity of up to 3881 kilograms. They are designed for companies that often transport forklifts or smaller site vehicles. Max. length 4000 mm



OV100-200 x 4000 mm



OV100-400 x 4000 mm



OV100-600 x 3000 mm

- Width 200 – 1000 mm
- Max. load up to 3880 kg
- Max. length 4000 mm




OV100-800 x 3000 mm



OV100-1000 x 3000 mm

## OV110 small ramps

OV110 small ramps are foldable, carry up to 1450 kilograms and thus ideal partners for industrial and commercial purposes.

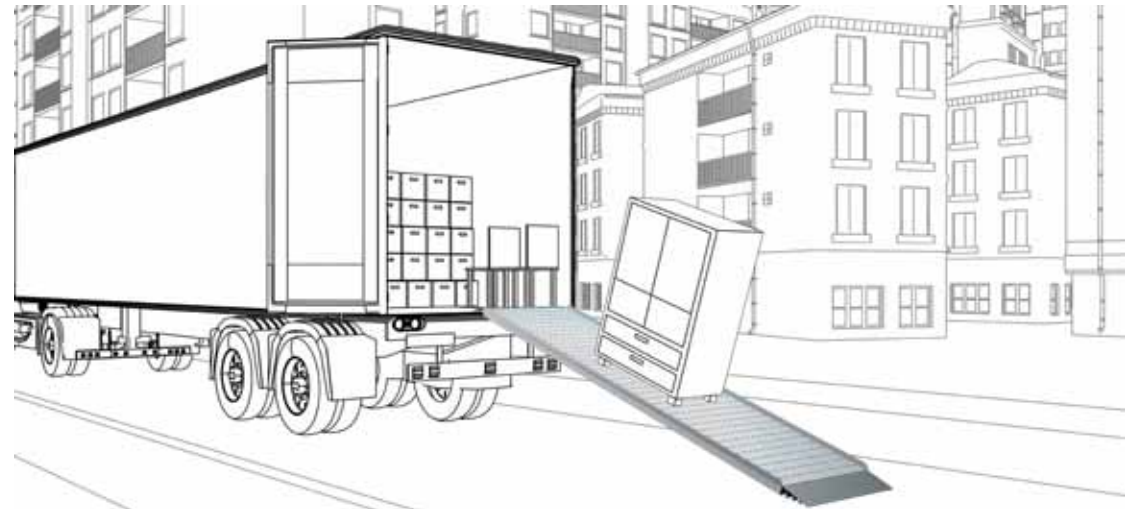

OV110-200 x 3000 mm



OV110-400 x 3000 mm



OV110-600 x 3000 mm


- Width from 200 – 800 mm
- Max. load up to 1450 kg
- Folding mechanism
- Max. length 3000 mm



OV110-800 x 3000 mm

## BR300 small ramps


BR300 bridges provide safe pedestrian access in and around construction areas. With a maximum length of 2 metres they carry up to 1550 kilograms. Their integrated folding mechanism enables an easy stacking of the bridge modules.

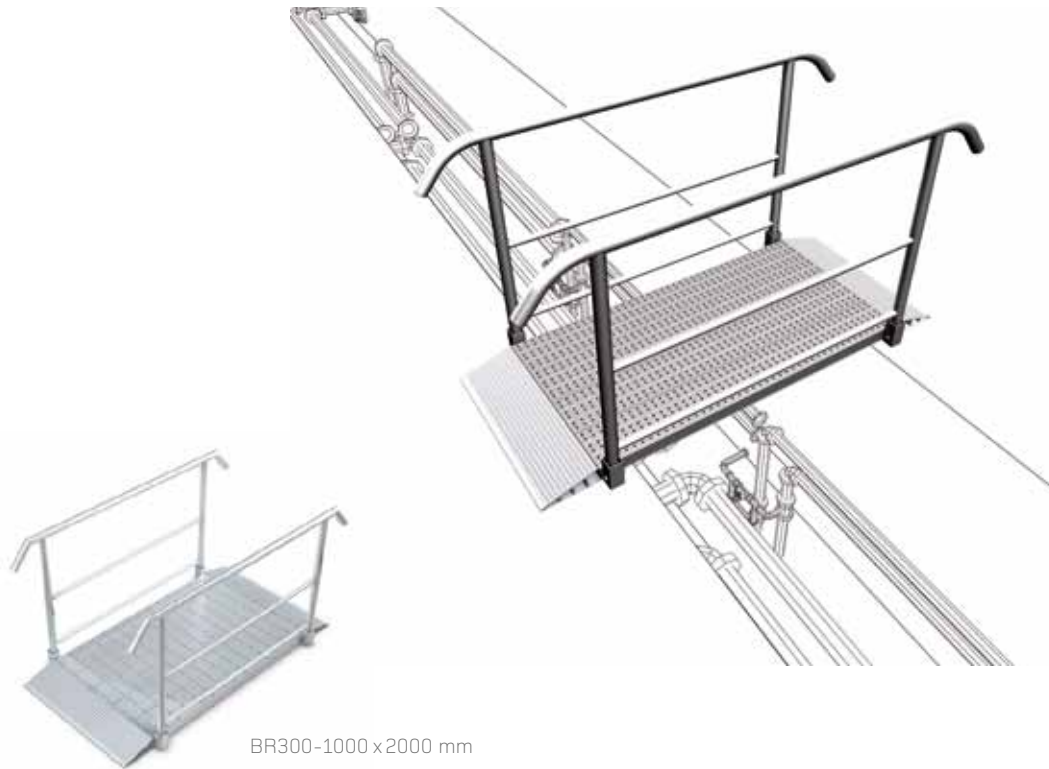

- Temporary bridge for safe pedestrian access
- Width up to 1000 mm
- Length up to 2000 mm
- Max. load capacity 1550 kg

## OV400 medium ramps

OV400 ramps are the ideal solution for loading heavy duty equipment up to 8500 kilograms. They are designed for heavy industrial commercial and automotive use.

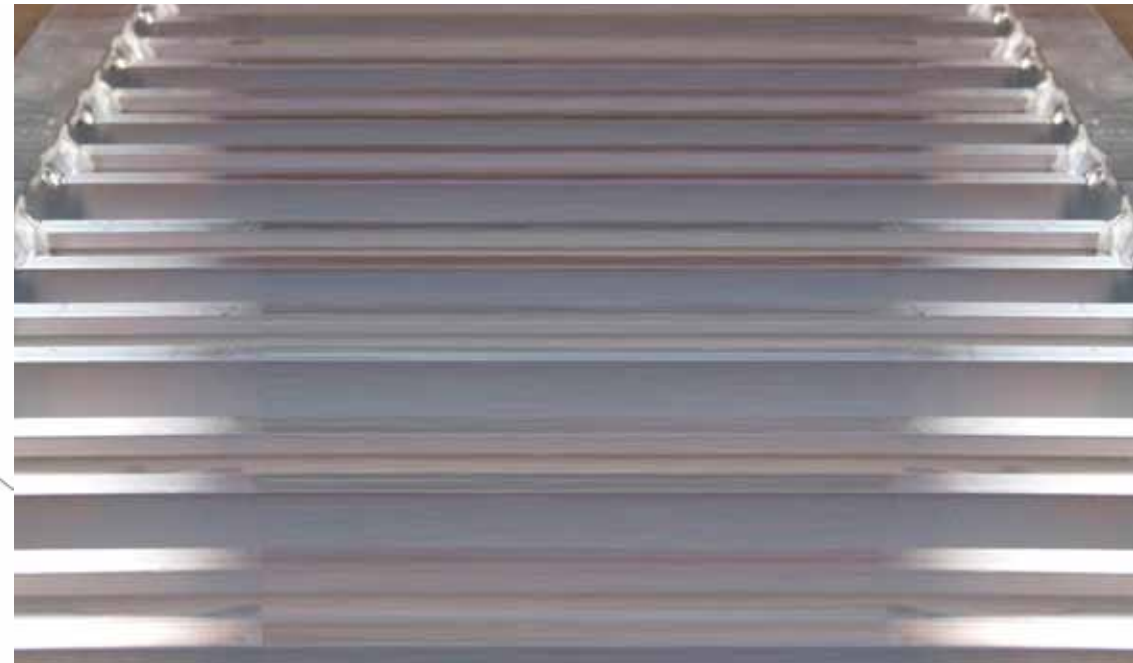

OV400-530 x 5000 mm



- Robust design for construction works
- Max. load up to 8500 kg
- Max. length 5000 mm
- Working in pairs
- With or without side rails




## RAM modular ramps (healthcare)


RAM modular ramps are the perfect solution for wheelchair access to buildings. Modular system allows to adapt the ramp to every condition. Possibility of any set according the request of customer.



- Safe solutions for your easy access
- Maximum loading 400 kg

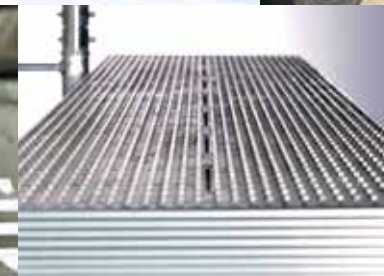



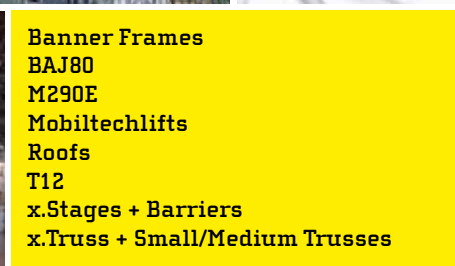

**Banner Frames**  
**BAJ80**  
**M290E**  
**Mobiltechlifts**  
**Roofs**  
**T12**  
**x.Stages + Barriers**  
**x.Truss + Small/Medium Trusses**



**MILOS CZ s.r.o.**  
 Špindlerova 286  
 Roudnice nad Labem  
 413 01  
 Czech Republic  
 Tel.: +420 416 837 846  
 Fax: +420 416 837 275  
 info@milos.cz

**Milos UK Ltd.**  
 Unit: 5-6 Beechwood Estate  
 Cattle Dyke, Gorefield  
 Wisbech Cambridgeshire  
 PE13 4NR  
 United Kingdom  
 Tel.: +44 (0)1945 410700  
 Fax: +44 (0)1945 410100  
 info@milosuk.co.uk

**Milos America, Inc.**  
 10520 Lakeridge Parkway  
 Suite A  
 Ashland, VA 23005  
 USA  
 Tel.: +1 800 411 0065  
 Fax: +1 800 411 0165  
 info@milosamerica.com

**Milos (Guangzhou) Co, Ltd**  
 House No.2, 6 Gong-Ye Road  
 Da-Wen Cun  
 Dong-Chong Zhen  
 Panyu district, Guangzhou  
 China  
 Tel.: +86 20 34900968  
 +86 20 34901398  
 Fax: +86 20 34900678  
 info@milos.cn  
 shuang@milos.cn

**Milos Concepts Gmbh**  
 Seidenstraße 57  
 70174 Stuttgart  
 Germany  
 Tel.: +49 711 99 79 896 0  
 Fax: +49 711 99 79 896 9  
 mail@milosconcepts.de