


Level (100:5004 Hz) = 94.37 dB SPL/watt (16 ohms, @1.00 meters)

8NDL51/16

MLSSA: Frequency Domain

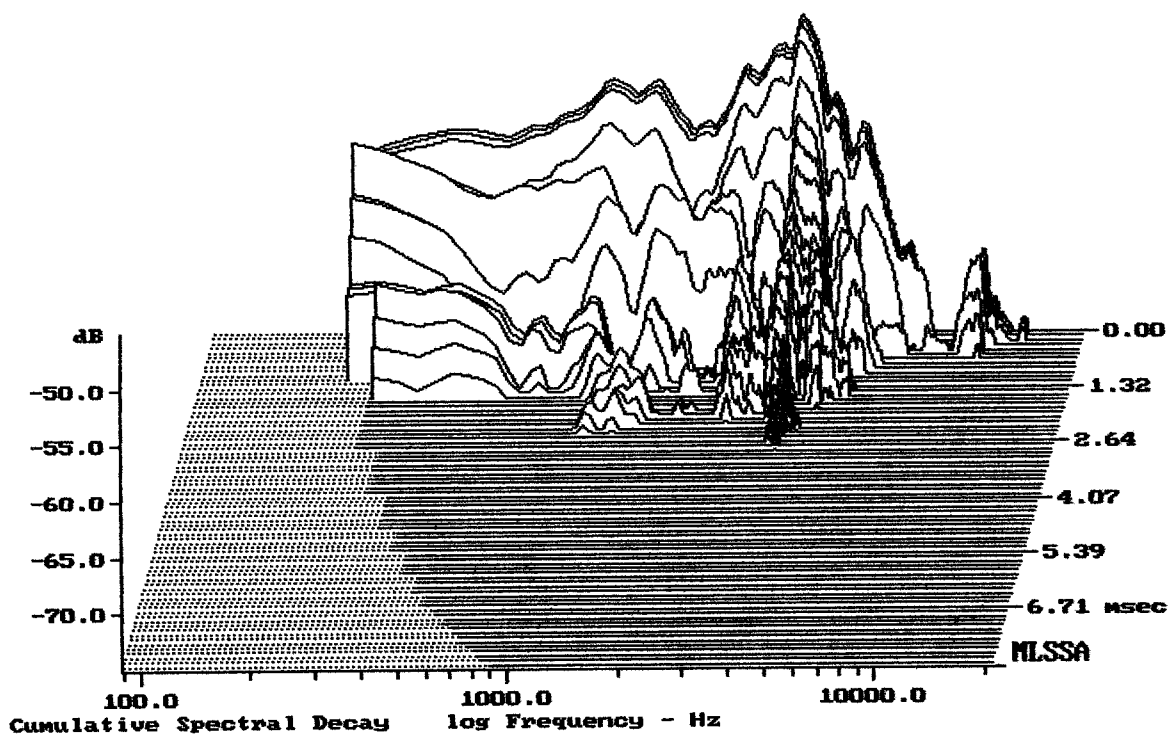

-73.79 dB, 3684 Hz (83), 2.750 msec (26)

DITO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	77.68	Hz
3	Re	10.47	Ohms[dc]
4	Res	117.56	Ohms
5	Qms	6.36	
6	Qes	0.57	
7	Qts	0.52	
8	L1	0.34	mH
9	L2	1.96	mH
10	R2	7.06	Ohms
11	RMSE-load	0.80	Ohms
12	Vas(Sd)	12.05	liters
13	Mms	22.36	grams
14	Cms	188	μ M/Newton
15	B1	14.20	Tesla-M
16	SPLref(Sd)	91.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.8% (-20% to -50% is recommended).

8NDL51/16

MLSSA: Parameters

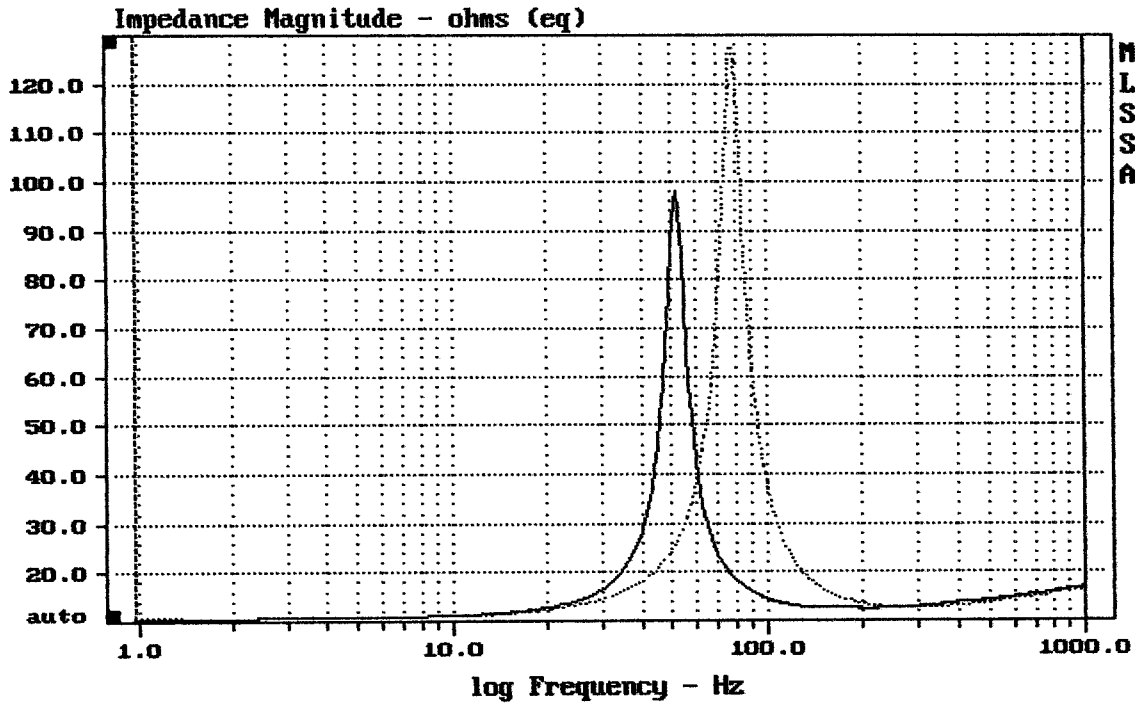

mean: 17.45, rms: 22.03, std: 13.45, max: 127.3, min: 10.57

MLSSA: Frequency Domain