


Level (200:5005 Hz) = 97.36 dB SPL/watt (16 ohms, @1.00 meters)

8PE21/16

MLSSA: Frequency Domain

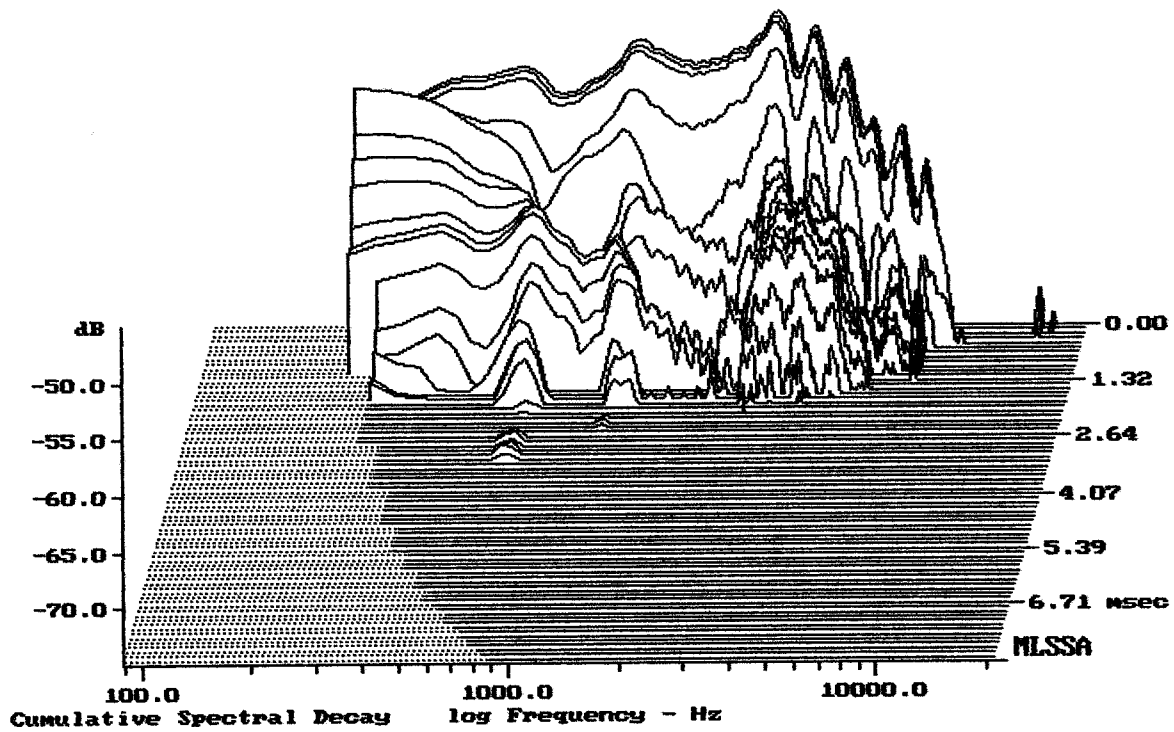

-74.50 dB, 2797 Hz (63), 1.870 msec (18)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.56	Ohms
2	Fs	84.11	Hz
3	Re	11.61	Ohms[dc]
4	Res	378.51	Ohms
5	Qms	8.41	
6	Qes	0.26	
7	Qts	0.25	
8	L1	0.89	mH
9	L2	2.21	mH
10	R2	6.25	Ohms
11	RMSE-load	1.01	Ohms
12	Vas(Sd)	14.61	liters
13	Mms	15.74	grams
14	Cms	227	$\mu\text{M}/\text{Newton}$
15	B1	19.35	Tesla-M
16	SPLref(Sd)	97.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -41.3% (-20% to -50% is recommended).

8PE21/16

MLSSA: Parameters

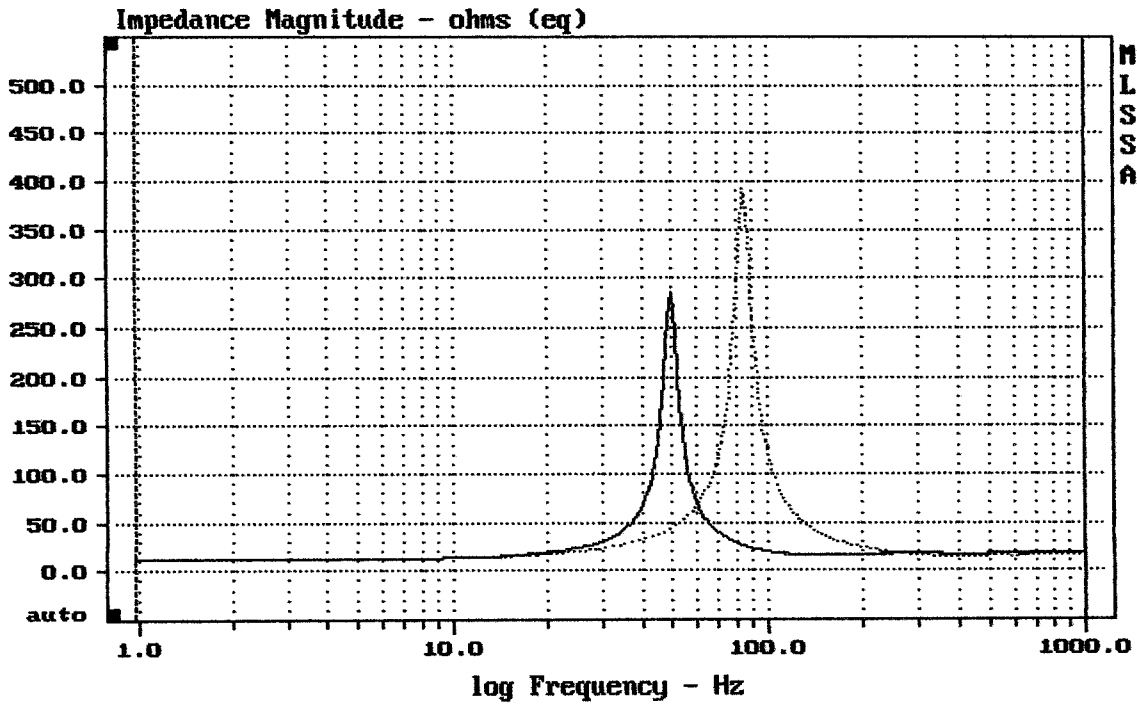

mean: 27.21, rms: 58.82, std: 41.98, max: 393, min: 11.83

MLSSA: Frequency Domain