


Level (200:5005 Hz) = 97.14 dB SPL/watt (16 ohms, @1.00 meters)

8PL21/16

MLSSA: Frequency Domain

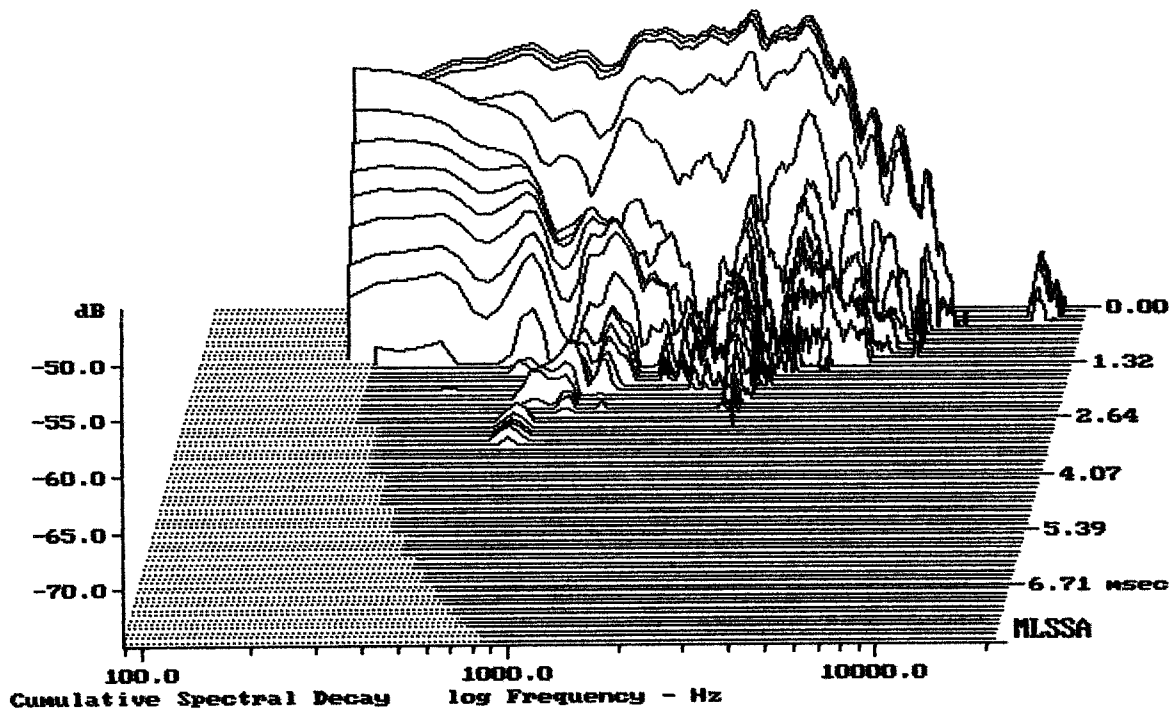

-74.49 dB, 2752 Hz (62), 2.640 msec (25)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.77	Ohms
2	Fs	82.07	Hz
3	Re	11.61	Ohms[dc]
4	Res	285.97	Ohms
5	Qms	5.98	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.88	mH
9	L2	2.35	mH
10	R2	6.94	Ohms
11	RMSE-load	0.95	Ohms
12	Vas(Sd)	14.75	liters
13	Mms	16.38	grams
14	Cms	230	μ M/Newton
15	B1	20.10	Tesla-M
16	SPLref(Sd)	97.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -40.7% (-20% to -50% is recommended).

8PL21/16

MLSSA: Parameters

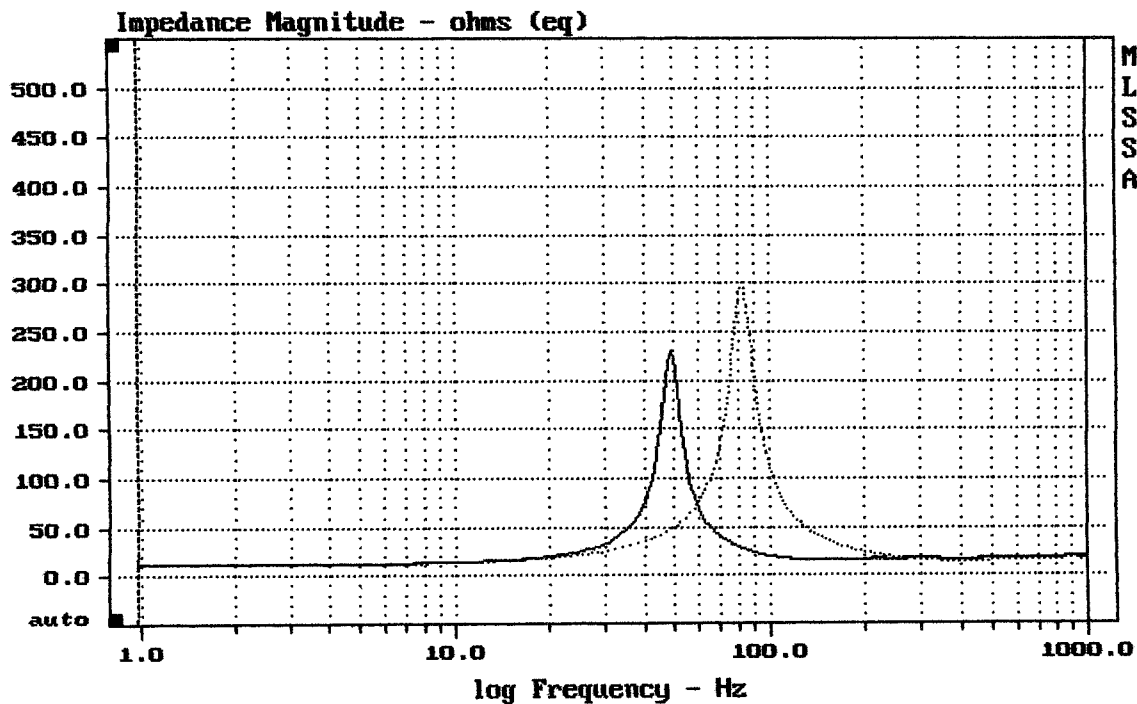

mean: 26.78, rms: 44.98, std: 36.14, max: 300, min: 11.82

MLSSA: Frequency Domain